Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED FLOOD LIGHT

CREE LED POWERED

6 YEAR WARRANTY*



IP65 RATING

3 IN 1 CCT

TECHNICAL DATA

MODEL	SKU	WATTS	USEFUL LUMEN @WIDE CONE	BEAM ANGLE	LIFE SPAN [HOURS]	DF	CRI	INPUT VOLTAGE	DIMENSION	N.W	MAX MOUNTING HEIGHT	PROJECTED AREA	BODY TYPE	IK RATING
VT-44014CCT	240726	10W	730 Lm	90°	50,000	>0.9	>80	AC: 220-240V, 50/60Hz	147x33x122mm	192g	3-5m	12-34m²	Aluminium	IK06
VT-44058CCT	240736	50W	4000 Lm	90°	50,000	>0.9	>80	AC: 220-240V, 50/60Hz	227x33x182mm	418g	3-5m	18.5-50.5m²	Aluminium	IK06
VT-44110CCT	240716	100W	8150 Lm	90°	50,000	>0.9	>80	AC: 220-240V, 50/60Hz	297x33x242mm	825g	3-5m	38-103m²	Aluminium	IK06
VT-44209CCT	240706	200W	16450 Lm	90°	50,000	>0.9	>80	AC: 220-240V, 50/60Hz	410x33x326mm	1550g	3-5m	100-200m²	Aluminium	IK06

The operating temperature range for these items is -20°C to +40°C.

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 6 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

FR


Cet appareil, ses accessoires et cordons se recyclent

À DÉPOSER EN MAGASIN ou À DÉPOSER EN DÉCHÈTERIE


Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Terminal block not included.
- Proper grounding should be ensured throughout the installation.
- For outdoor use.
- Replace any cracked protective shield.
- Minimum distance from lighted objects 1m. 1M




Replaceable light source by a professional



Non-replaceable control gear

NOTE

- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- In order to maintain the IP protection of the product, the cable entry/gland should be installed on the bottom side.




Caution, risk of electric shock.



This marking indicates that this product should not be disposed of with other household wastes.

INSTALLATION DIAGRAM


1

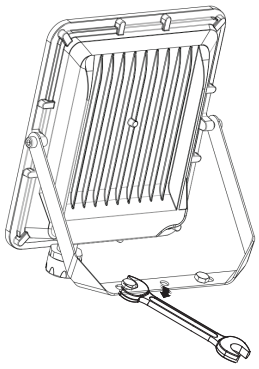


2




3



4




5

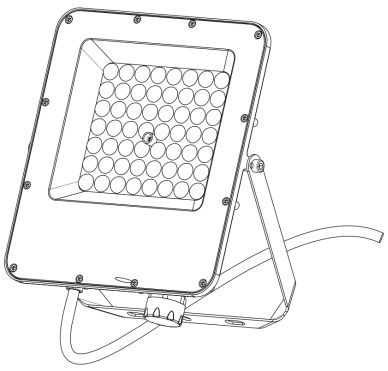

WIRE LENGTH: 120mm

WIRING DIAGRAM





CCT Switch


INSTALLATION INSTRUCTIONS

Important: Strictly follow the steps below during installation. Avoid applying excessive force to the power cable. The supply connection and other external wiring conductors must be at least 3 x 1.0 mm^2

- Ensure the power is turned off before starting the installation.
- Secure the brackets to the desired surface.
- Loosen the bolts on both sides of the bracket.
- Adjust the floodlight to the desired angle.
- Tighten the bolts on both sides of the bracket to secure the position.
- Connect the floodlight wiring according to the wiring diagram.
- Set the desired color temperature using the CCT switch.
- Turn on the power and test the floodlight.

DISMANTLING INSTRUCTIONS

(For Market surveillance team only)

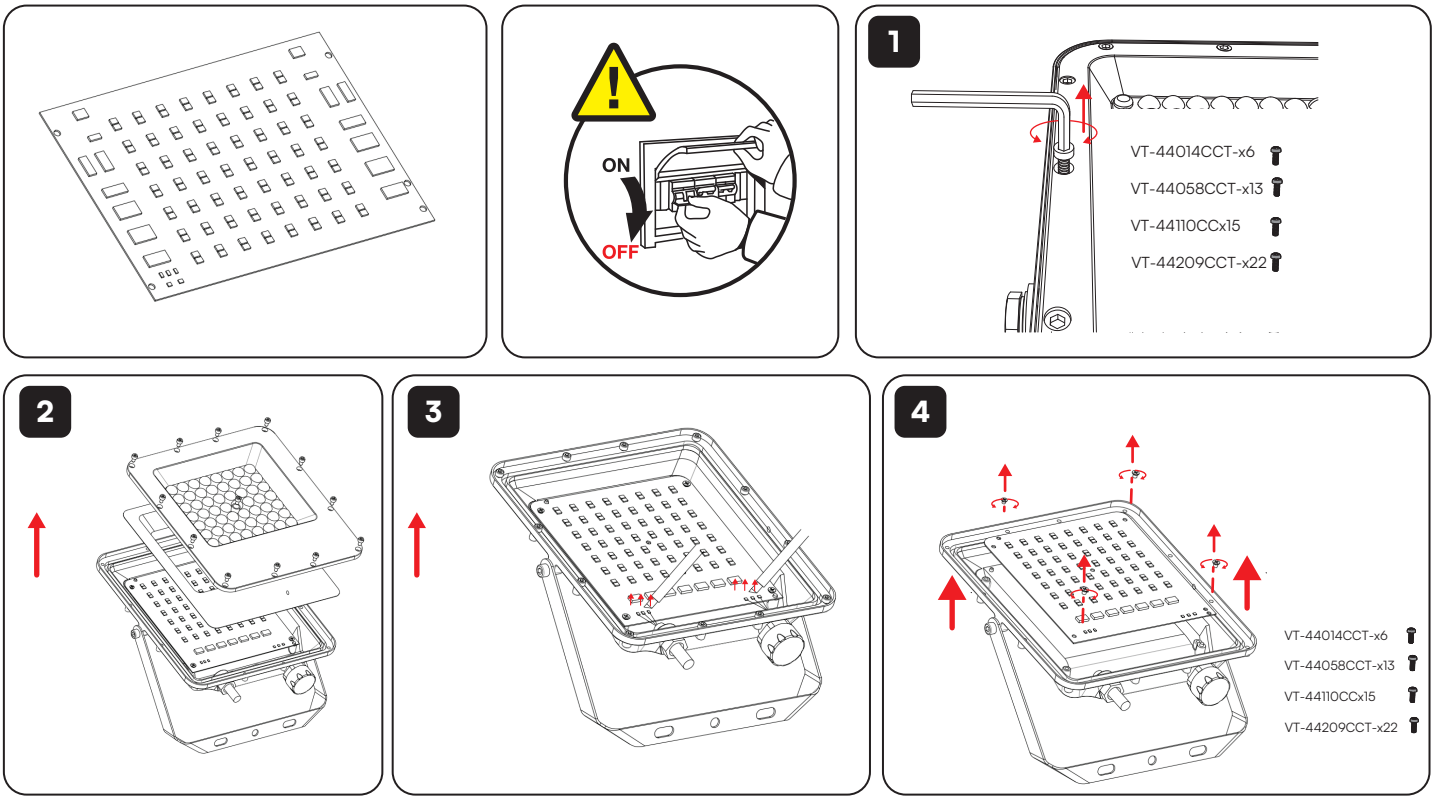

Note: Light source removal will void the warranty

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX

RoHS CE UKCA 22 PAP