

Operation Manual

MANUAL CABLE STRIPPER

ARTIKELNUMMER: 61952



Read and follow the operating instructions and safety information before using for the first time.

Technical changes reserved!

Due to further developments, illustrations, functioning steps and technical data can differ insignificantly.

Updating the documentation

If you have suggestions for improvement or have found any irregularities please contact us.



The information contained in this document is subject to change without prior notice. No part of this document can be copied or duplicated in another form without the prior written consent of WilTec Wildanger Technik GmbH. The WilTec Wildanger Technik GmbH assumes no liability for any errors in this user manual or the connection diagram.

Although WilTec Wildanger Technik GmbH has made every effort to make sure that this user manual is complete, accurate and updated, errors cannot always be avoided. In the event of problems with this user manual please complete and send this form back to us.

FAX-notification (+++49 2403 55592-15),

from: _____

Name: _____

Firm: _____

Tel/Fax: _____

I would like to report the following mistakes:

Customer Service WilTec Wildanger Technik GmbH

e-mail: service@WilTec.info

Tel:++ +49 2403 55592-0

Introduction

Thank you for purchasing this quality product. **To minimize the risk of injury by means of fire or electric shock we urge that our clients take some basic safety precautions when using this device. Please read the operation instructions carefully and make sure you have understood its content.**

Always use a grounded power connection with the appropriate mains voltage. You can find the corresponding mains voltage on the type plate. If you have any doubts about the connection being grounded, have it checked by a qualified professional. Never use a faulty electric cable.

Do not inspect the electrical part of the pressure pond filter in a wet or damp environment or when you are wet yourself and protect it from direct sunlight. Install this device in a safe location so that nobody can step on the cable, fall over or damage it. Disconnect the power plug before cleaning it and use only a damp cloth for cleaning. Avoid using cleaning agents and make sure that no liquid enters the electrical part of the pump.

The electric part of the device contains no parts that can be inspected or serviced by the user. Leave the maintenance, adjustment and repair to qualified technical personnel. In case of unauthorised intervention the 2-year warranty is no longer valid! Keep these operation instructions safe.

Security Advice




The owner and/or user must have read and understood the instructions for use of the appliance before using it. Instructed personnel should be careful, competent, trained and qualified in the safe handling of the equipment used. Warnings should be read and understood.

- Never touch the machine with your fingers under any circumstances or at any time as this can lead to serious injuries.
- We recommend the use of safety gloves to minimise the risk of injury.
- Observe the applicable occupational safety and accident prevention regulations.
- This equipment is not intended for use by persons (or children) with reduced physical, sensory or mental abilities or persons without appropriate experience or knowledge, unless they are supervised by a person responsible for their safety or have received prior instruction in the use of the equipment.
- Children must be supervised to ensure that they do not play with the equipment.
- Use a hair net for long hair.
- In addition, the local accident prevention regulations and general safety regulations applicable to the area of application of the device must be observed.

Description

1. Regulating screw
2. Adjusting nut
3. Hand crank
4. Feed
5. Self-locking nut
6. Feed insert
7. Drill connector bit
8. Shaft
9. Blade

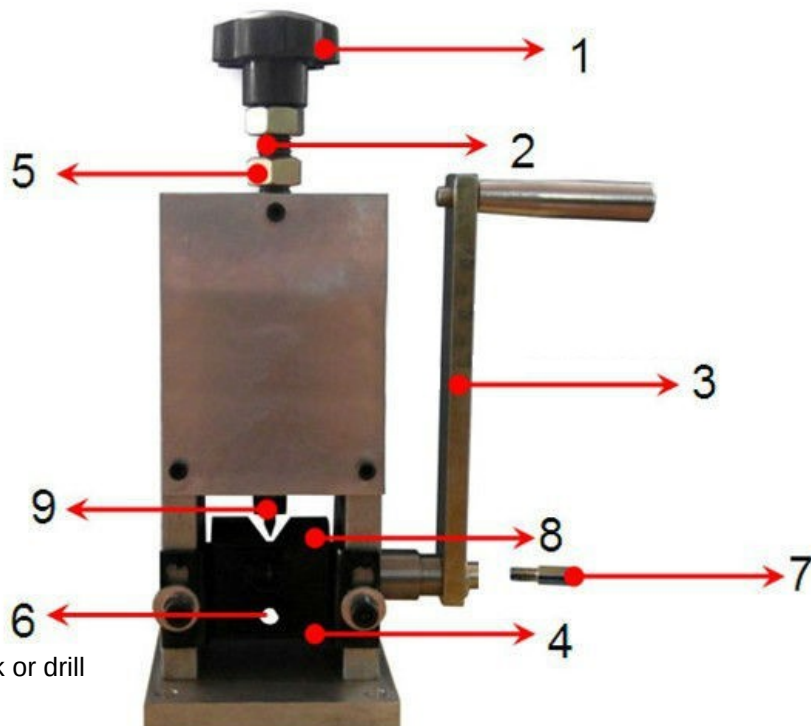

Specifications

Capacity: Ø 1.5 mm – 25 mm
 Size: 15 x 13 x 31 cm
 Weight: 5.5 kg
 Mode of operation: Hand crank or drill

Operation

1. First, make sure to adjust the distance between the blade and the shaft according to the size of the cable that is to be stripped. Please make sure that the device is set to only strip the insulating layer without damaging the inner conductors.
2. Thread the cable into the feed and adjust the same until the cable can be pulled through without shifting inside the fixture.
3. Use the hand crank in order to strip the cable of its insulation layer by pulling it past the blade. Alternatively, the hand crank can be removed from the device and can be replaced with a drill by utilising the drill connector bit.
4. Should the device be unable to separate the cable from its insulation, it might be due to one of the following reasons:
 - The diameter of the cable is too small.
 - The blade is not positioned in the centre and has therefore to be adjusted.
 - The blade has gotten dull and needs to be whet.

Address:
WITec Wildanger Technik GmbH
Königsbenden 12 / 28
D-52249 Eschweiler

Important notice:

The reprint or reproduction, even of excerpts, and any commercial use, even in part of this instructions manual require the written permission of WITec Wildanger Technik GmbH.