




ENGLISH

Datasheet

PVC 15m Long transparent Flexible Tube Reinforced, 320mm Bend Radius, Applications Various

RS Stock number 2430172

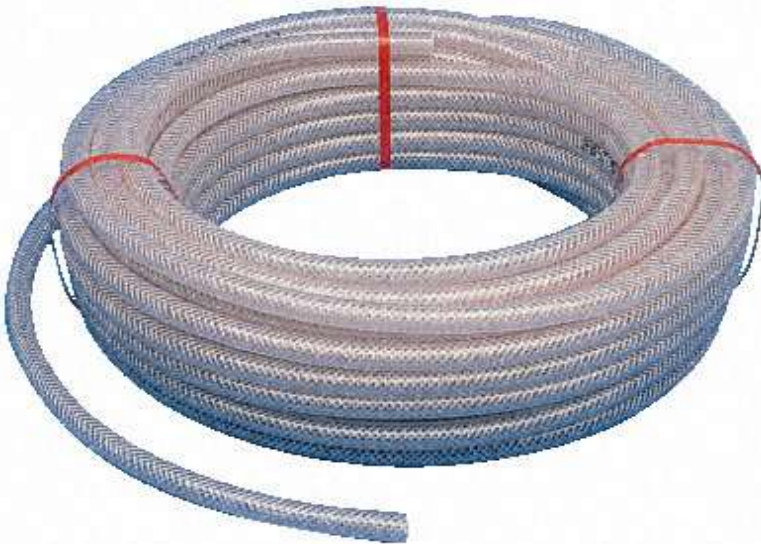

Features

Excellent glass clear transparency for clear visibility.

Good flexibility for ease of use.

Resistant to a wide range of chemicals including many acids / alkalis.

Abrasion resistant. Thicker wall gives medium to heavy duty durability for improved resistance to abrasion.

Specially selected high tensile polyester fibres used at the optimum braid angle of $54^{\circ} 44'$ (54.73°) creates an effective and balanced pressure hose.

EC compliant for food contact applications.

RoHS compliant.

Manufactured from cadmium and silicone-free materials, using a specialist PVC that can reduce the taint of drinking water.

Service temperature = -15°C to $+ 60^{\circ}\text{C}$.

Manufactured in accordance with ISO 5774.

4:1 safety factor