

Nuts Screws Washers and Bolts

| Order code | Manufacturer code | Description |
|------------|-------------------|--------------------------------|
| 33-4350 | n/a | 100 S/S NO.4 6.5MM PAN HD POZI |
| 33-4355 | n/a | 100 S/S NO.4 9.5MM PAN HD POZI |
| 33-4360 | n/a | 100 S/S NO.4 13MM PAN HD POZI |
| 33-4365 | n/a | 100 S/S NO.6 6.5MM PAN HD POZI |
| 33-4370 | n/a | 100 S/S NO.6 9.5MM PAN HD POZI |
| 33-4375 | n/a | 100 S/S NO.6 13MM PAN HD POZI |
| 33-4380 | n/a | 100 S/S NO.6 19MM PAN HD POZI |
| 33-4385 | n/a | 100 S/S NO.8 9.5MM PAN HD POZI |
| 33-4390 | n/a | 100 SS NO.8 12.7MM PAN HD POZI |
| 33-4395 | n/a | 100 S/S NO.8 19MM PAN HD POZI |

| | |
|--|--------------------------|
| Nuts Screws Washers and Bolts | Page 1 of 2 |
| The enclosed information is believed to be correct, Information may change 'without notice' due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E. | Revision A 04/07/2003 |

Stainless Steel Pan Head Pozidriv Self Tapping Screws


A range of Pan Head Pozidriv self tapping stainless steel screws. Resistant to corrosion, chemicals and heat. Applications include electronic, domestic, chemical and construction use, as well as in food and medical environments. Suitable for use in a wide variety of materials including plastic, sheet metal, plywood, castings, etc.

Meets the following - Standards / Specifications

DIN 7981 Form C BN 994

Technical Specification

Material: Stainless Steel 450 HV

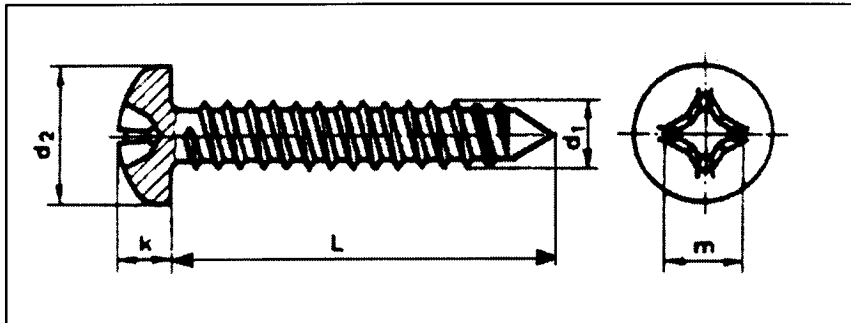

| Type | Screw Length (L) | Screw Dimensions (mm) | | | |
|-------|------------------|-----------------------|-----|-------|-----|
| | | d1 | d2 | k max | m ~ |
| No. 4 | 6.5 mm | 2.9 | 5.6 | 2.2 | 3 |
| No. 4 | 9.5 mm | 2.9 | 5.6 | 2.2 | 3 |
| No. 4 | 13.0 mm | 2.9 | 5.6 | 2.2 | 3 |
| No. 6 | 6.5 mm | 3.5 | 6.9 | 2.6 | 4.2 |
| No. 6 | 9.5 mm | 3.5 | 6.9 | 2.6 | 4.2 |
| No. 6 | 13.0 mm | 3.5 | 6.9 | 2.6 | 4.2 |
| No. 6 | 19.0 mm | 3.5 | 6.9 | 2.6 | 4.2 |
| No. 8 | 9.5 mm | 4.2 | 8.2 | 3.05 | 4.6 |
| No. 8 | 12.7 mm | 4.2 | 8.2 | 3.05 | 4.6 |
| No. 8 | 19.0 mm | 4.2 | 8.2 | 3.05 | 4.6 |