

DIN RAIL POWER SUPPLY

48VDC 240WATT

STONTRONICS: DG-240-48



Features:

- Universal / Full Range Input
- Highly Reliable Design
- 100% Full Load Burn-in Test
- 3 Year Warranty

Description:

The TT Electronics range of Din Rail Power Supplies can be installed on either TS-35/7 or TS-35/18. Featuring wide ranging universal Input for many industrial application and come with a 3 year warranty as standard. This 240watt unit is offered in 48v and comes with built in active PFC.

Specification	
Part Number	DG-240-48
DC Output	48V
Rated Output Current	5A
Ripple & Noise	≤480mV
Voltage ADJ Range	48-56V
Line Regulation	±0.5%
Load Regulation	±1%
Set up Time	<3S@230Vac
Hold up Time	≥20mS @ 230Vac input, Full load
Temperature Coefficient	±0.03%/°C
Overshoot and Undershoot	<5%
Input Voltage Range	85Vac - 264Vac
Input Frequency	47Hz-63Hz
Efficiency	93%
AC Current (max.)	<3A/100Vac <1.5A/230Vac
Inrush Current (max.)	<20A/110Vac <40A/230Vac Cold start
Leakage Current	Input-output:<0.25mA Input—PG:<3.5mA
Over Load Protection	110% - 150% of rated current
Over Voltage Protection	58-63V, constant voltage, Auto recovery
Short Circuit	Long-term mode, auto recovery
Operating Temp. & Humidity	-25°C to 70°C / 20% to 90%
Storage Temp. & Humidity	-40°C to 85°C / 5% to 95%
Safety Standards	UL508, UL60950, EN60950
Withstand Voltage	Primary-Secondary:3.0KVac; <10mA Primary-PG:2.5KVac; <10mA Secondary-PG0:5KVac-20mA
Isolation Resistance	≥100M ohms
EMC Emission	Compliance to EN55032, EN55024, FCC PART 15 Class B
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; heavy industry level
MTBF	More than 300,000 hours
Dimensions	45mm x 124mm x 119mm

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

STONTRONICS

TT Electronics IoT Solutions Ltd
Tofts Farm East, Brenda Road, Hartlepool, TS25 2BQ, UK
t: +44 (0) 1429 852 500


DIN RAIL POWER SUPPLY

48VDC 240WATT


STONTRONICS: DG-240-48



Diagrams

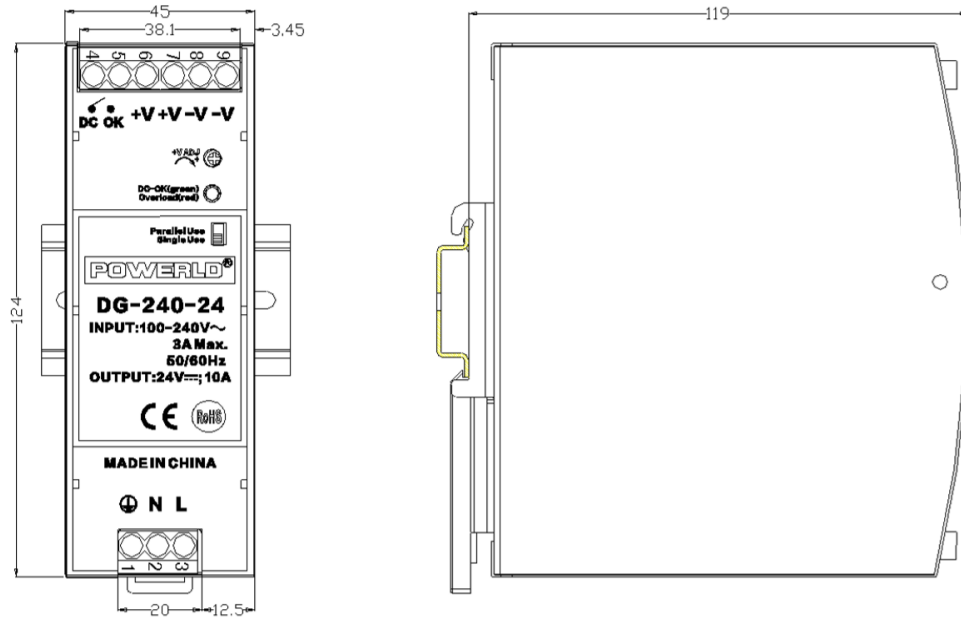

Derating Curve

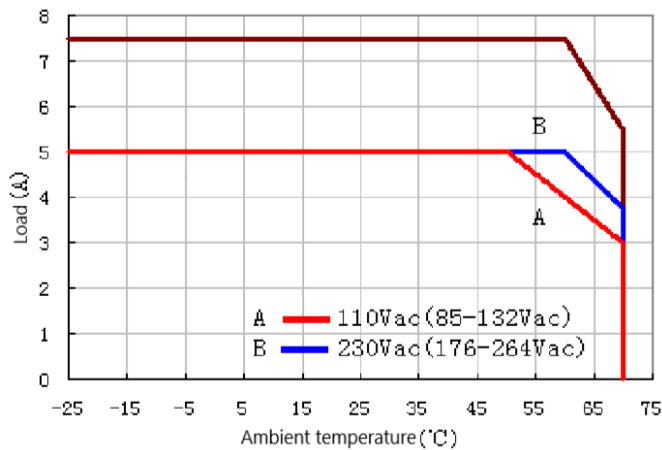

- short time working, 3S
- continuous working

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.