

◆ Features:

- High brightness, high power
- wide beam angle - 170deg
- Chain 25pcs
- waterproof IP 67, injection molding
- internal constant current control
- internal radiator for better heating dissipation
- 5y warranty

◆ Application:

- 3D letters
- Lightboxes 15-30 cm

◆ Photo:

CE






MW-MLD-XL-4W-LENS

Supply	Working voltage	12Vdc +/- 5%
	Power consumption (1pcs)	2W
	Current consumption	0.16A
	Chain power consumption	50W
LED	LED type	2835
	Q-ty	4
	Colour temperature	W-white (6000-8000K) CW-cold white (10000-14000K)
	Flux	180Lm
	Flux density	93lm/W
	Beam angle	170° (PC)
	Lifetime	L70B50 > 35 hours
Connection	Soldering	Yes
	Connectors	Yes
Wire	Wire lenght	230 mm
	Wires mark	White-red (+) white (-)
Features	IP degree	IP 67
	Temperaure	Working: -25°C ... +55°C Stoerage: -40°C ... +65°C
Dimmesion	Height, width, lenght	5,9 x 40 x 40 mm
Montage	Adhesive tape	Yes
	Screw	Yes
	Hole size	M3
Other	Material	ABS
	Q-ty per 1mb	4pcs
Packing	Chain	25pcs (6,75mb)
	Bag	75pcs
	Cartoon box smal / big	600pcs/1200pcs

◆ DIMMENSION:

Unit: mm

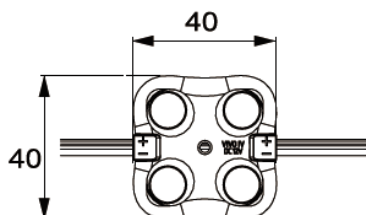

◆ TYPICAL APPLICATION

