

Easy



RAL 9005

Easy

Raccordements

Chauffage central




Électrique



Mixte



Dimensions disponibles

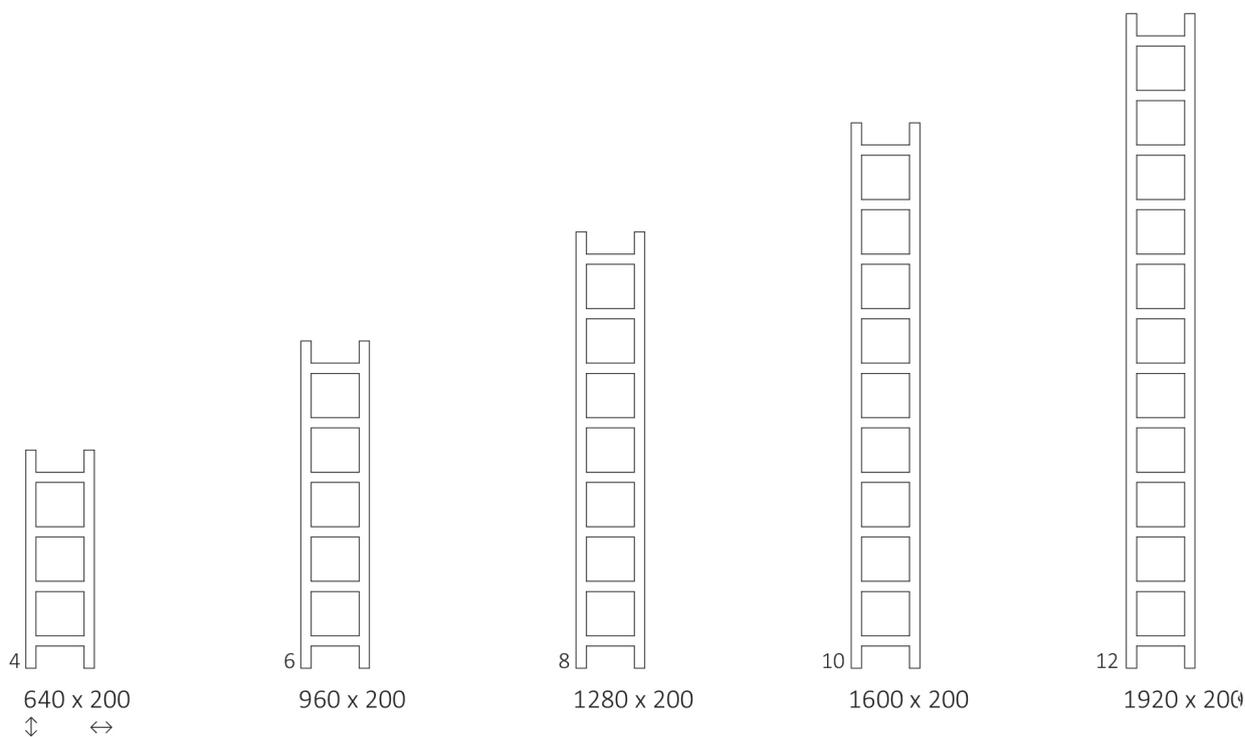

Easy


Données techniques

Pression du travail : 800 kPa

Température maximale de travail : 95°C

A \updownarrow [mm]	B \leftrightarrow [mm]	C2 [mm]	75 65 20°C [W]	55 45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]
Peinture epoxy										
640	200	160	124	68	100	160	320	160	1,24	3,01
960	200	160	187	102	200	90	800	80	2,64	4,44
1280	200	160	251	136	300	160	960	160	3,48	5,78
1600	200	160	314	170	300	160	1280	160	4,56	7,17
1920	200	160	378	204	400	160	1600	160	5,72	8,55
Revêtement galvanique										
640	200	160	87	44	100	160	320	160	1,24	2,92
960	200	160	131	67	100	160	640	160	2,36	4,26
1280	200	160	176	90	200	160	960	160	3,48	5,60
1600	200	160	220	112	200	160	1280	160	4,56	6,94

Easy

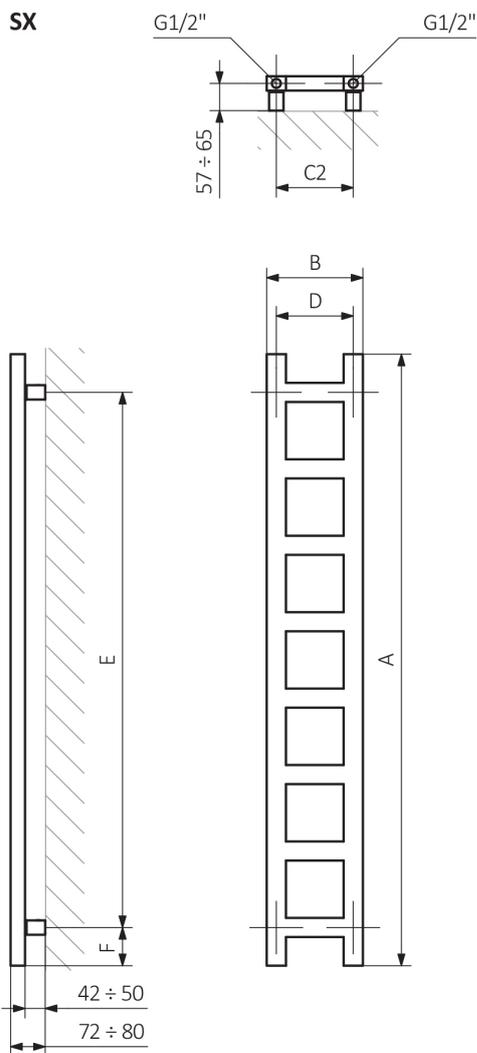

A – hauteur B – largeur C1-C5 – écartement des raccordements D – écartement des consoles en horizontal E – écartement des consoles en vertical F – distance de l'axe de la console inférieure au bord inférieur du collecteur

Tube :

