


Warp S



COULEUR
AU CHOIX



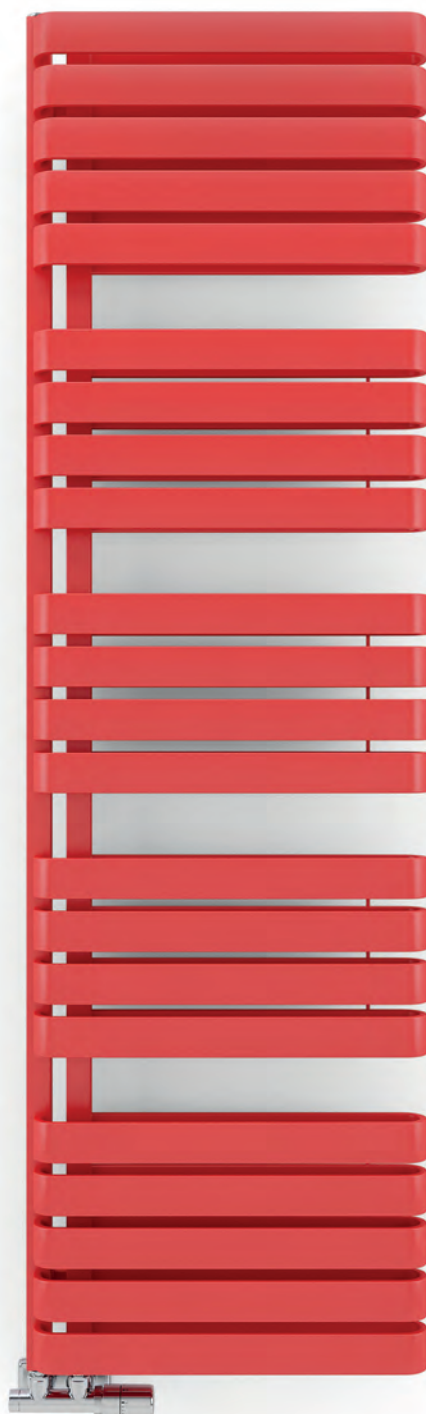


Warp S

Raccordements

Chauffage central



Électrique

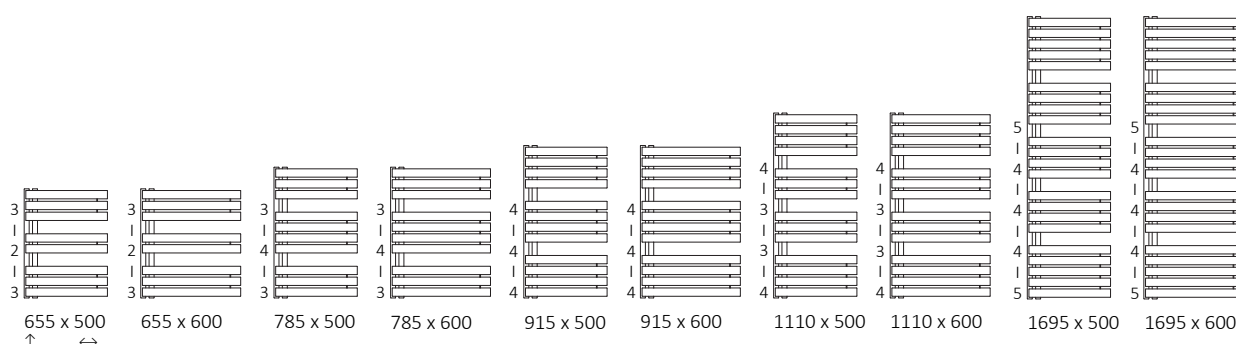

Radiateurs eau – données techniques :

Pression du travail : 600 kPa Température maximale de travail : 95°C


A [mm]	B [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	g [W]	D [mm]	E [mm]	F [mm]	p [dm³]	v [kg]
655	500	50	450	241	400	50	455	100	3,45	12,39
655	600	50	506	271	600	50	455	100	3,98	14,56
785	500	50	551	297	600	50	585	100	4,27	15,30
785	600	50	653	351	600	50	585	100	4,93	18,01
915	500	50	643	346	600	50	715	100	5,09	18,21
915	600	50	761	408	800	50	715	100	5,87	21,47
1110	500	50	764	406	800	50	910	100	5,99	21,30
1110	600	50	857	456	800	50	910	100	6,91	25,10
1695	500	50	1167	620	1200	50	1495	100	9,34	33,11
1695	600	50	1310	696	1200	50	1495	100	10,79	39,07

Radiateurs électriques – données techniques :

A [mm]	B [mm]	g [W]	D [mm]	E [mm]	F [mm]	p [dm³]	v [kg]
915	500	600	50	715	100	5,09	22,33
915	600	800	50	715	100	5,87	26,22
1110	500	800	50	910	100	5,99	26,15
1110	600	800	50	910	100	6,91	30,70
1695	500	1200	50	1495	100	9,34	40,68
1695	600	1200	50	1495	100	10,79	47,81

Warp S

Dessin technique :

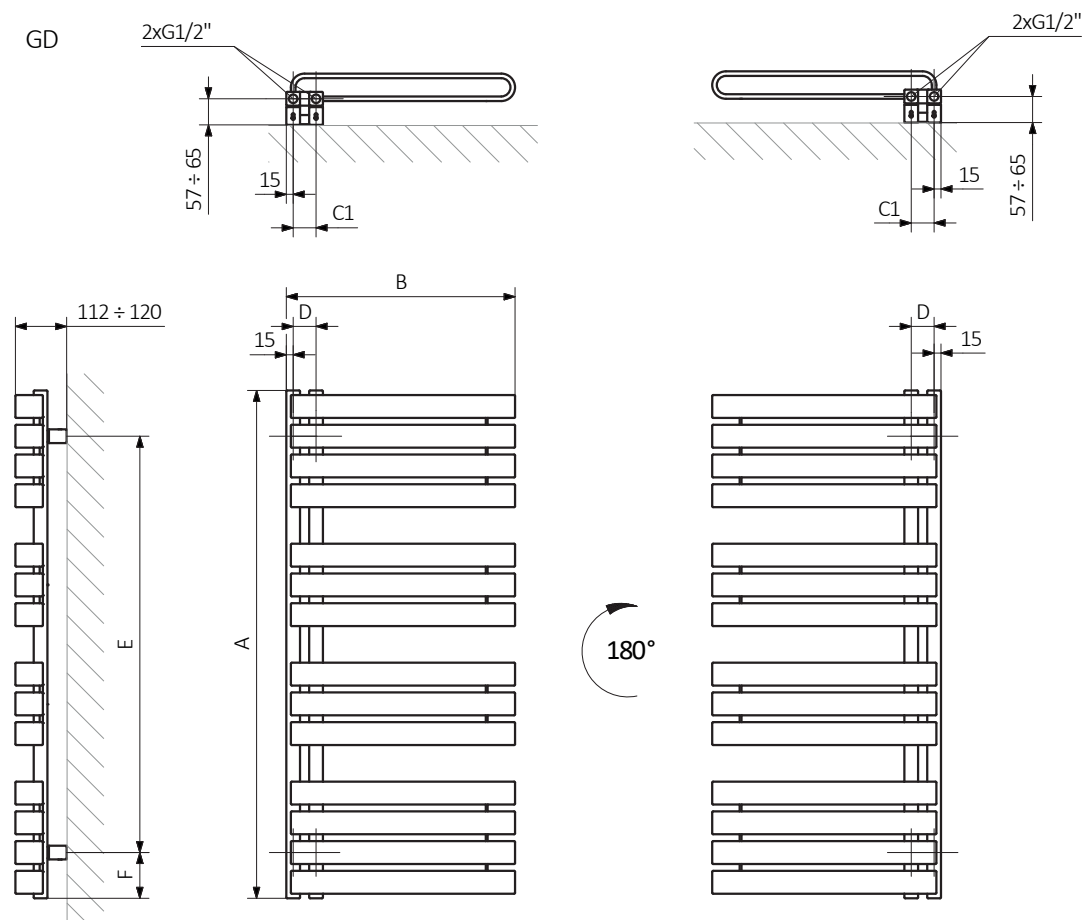

A – hauteur B – largeur C1-C5 – écartement des raccordements D – écartement des consoles en horizontal

E – écartement des consoles en vertical F – distance de l'axe de la console inférieure au bord inférieur du collecteur

Collecteur :

Tube :

