



PLOTS

# TECHNICAL SHEET

## Adjustable pedestal 90/150 mm for wooden deck - Rinno Plots




### SIDE VIEW



Height of support : 30 mm

Adjustable height from 90 to 150 mm

### TOP VIEW

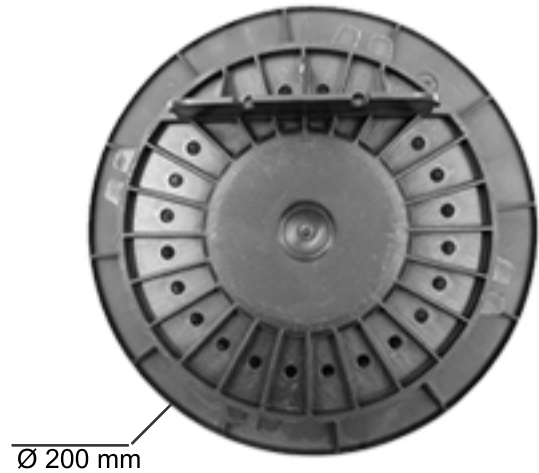

### PEDESTALS SPECIFICATIONS



Plot made of recycled material



Resistant to acid and basic solutions



Resistant to atmospheric agents



Resistant to temperatures between -30°C and +60°C

D.T.U

The pedestals conform to the DTU 43.1 and 51.4



Tested for loads superior to 1 ton

>PP<

Synthetic resin

### CURRENT STANDARDS AND RECOMMENDATIONS

- DTU 43.1 (NF P 84.204) Sealing works of roof-terraces and sloping roofs with elements masonry carriers:

The minimum section of each face is 100 cm<sup>2</sup>

The breaking strength of the pedestals must be such that they support:

- 2.5 KN during an eccentric loading test on 1/4 of the pedestal

- 5.0 KN in a uniformly distributed load test

on the whole section of the pedestal.

- DTU 20.12 (NF P 10.203) Design of the structural work in masonry of roofs to be coated/sealing.

- NF P06.001 Basis of calculation of constructions-loads of buildings

- DTU P06.002 modified NV65 wind rules 2009

- DTU P06.006 Modified N84 rules 2009 - Action of the snow on buildings

- NF EN 1339 Concrete slabs

- NF DTU 51.4 P1-1 (CCT) Building work Platelages wooden exteriors