

# BUDERUS Logatrend VC-, VCM-, C-Profil Heizkörper-Wattleistungen in der Übersicht



Höhe mm	Länge mm	Typ 11 Bautiefe 62 mm	Typ 21 Bautiefe 66 mm	Typ 22 Bautiefe 102 mm	Typ 33 Bautiefe 157 mm	Höhe mm	Länge mm	Typ 11 Bautiefe 62 mm	Typ 21 Bautiefe 66 mm	Typ 22 Bautiefe 102 mm	Typ 33 Bautiefe 157 mm
Wärmeleistung in Watt bei 70/55/20 °C / 55/45/20 °C						Wärmeleistung in Watt bei 70/55/20 °C / 55/45/20 °C					
300	400	180/115	249/160	317/202	461/294	400	400	229/147	307/196	394/250	571/364
	500	225/144	311/200	396/252	576/368		500	287/184	384/246	493/313	714/455
	600	270/173	374/240	475/303	691/442		600	344/221	461/295	591/375	857/546
	700	315/202	436/280	554/353	806/515		700	401/257	538/344	690/438	1000/637
	800	360/231	498/320	634/404	922/589		800	459/294	615/393	788/500	1142/727
	900	405/260	560/361	713/454	1037/663		900	516/331	692/442	887/563	1285/818
	1000	450/289	623/401	792/504	1152/736		1000	573/368	769/491	985/625	1428/909
	1200	540/346	747/481	951/605	1382/883		1200	688/441	922/589	1182/750	1714/1091
	1400	630/404	872/561	1109/706	1613/1031		1400	803/515	1076/688	1379/875	1999/1273
	1600	720/462	996/641	1267/807	1843/1178		1600	918/588	1230/786	1576/1000	2285/1455
	1800	810/520	1121/721	1426/908	2074/1325		1800	1032/662	1384/884	1773/1125	2570/1637
	2000	900/577	1245/801	1584/1009	2304/1472		2000	1147/735	1537/982	1970/1250	2856/1819
	2300	1035/664	1432/921	1822/1160	2650/1693		2300	1319/846	1768/1130	2266/1438	3284/2091
	2600	1170/751	1619/1041	2059/1311	2995/1914		2600	1491/956	1998/1277	2561/1625	3713/2364
3000	1351/866	1868/1202	2376/1513	3456/2208	3000	1720/1103	2306/1473	2955/1875	4284/2728		


# BUDERUS Logatrend VC-, VCM-, C-Profil Heizkörper-Wattleistungen in der Übersicht



Höhe mm	Länge mm	Typ 11 Bautiefe 62 mm	Typ 21 Bautiefe 66 mm	Typ 22 Bautiefe 102 mm	Typ 33 Bautiefe 157 mm	Höhe mm	Länge mm	Typ 11 Bautiefe 62 mm	Typ 21 Bautiefe 66 mm	Typ 22 Bautiefe 102 mm	Typ 33 Bautiefe 157 mm
Wärmeleistung in Watt bei 70/55/20 °C / 55/45/20 °C						Wärmeleistung in Watt bei 70/55/20 °C / 55/45/20 °C					
500	400	277/178	364/232	470/298	676/429	600	400	323/206	420/267	545/346	777/491
	500	346/222	455/290	588/373	845/536		500	404/258	525/333	681/432	971/614
	600	416/267	546/348	705/447	1014/643		600	484/309	630/400	817/519	1165/737
	700	485/311	638/406	823/522	1183/750		700	565/361	735/466	953/605	1359/859
	800	554/355	729/464	940/597	1351/858		800	646/413	840/533	1090/691	1553/982
	900	624/400	820/522	1058/671	1520/965		900	726/464	945/600	1226/778	1747/1105
	1000	693/444	911/580	1175/746	1689/1072		1000	807/516	1050/666	1362/864	1941/1228
	1200	832/533	1093/696	1410/895	2027/1286		1200	968/619	1260/800	1634/1037	2330/1473
	1400	970/622	1275/812	1645/1044	2365/1501		1400	1130/722	1470/933	1907/1210	2718/1719
	1600	1109/711	1457/928	1880/1193	2703/1715		1600	1291/825	1680/1066	2179/1383	3106/1964
	1800	1247/800	1639/1044	2115/1342	3041/1930		1800	1453/928	1890/1199	2452/1556	3494/2210
	2000	1386/889	1821/1160	2350/1491	3379/2144		2000	1614/1031	2100/1333	2724/1729	3883/2455
	2300	1594/1022	2095/1334	2703/1715	3885/2466		2300	1856/1186	2415/1532	3133/1988	4465/2824
	2600	1802/1155	2368/1508	3055/1939	4392/2787		2600	2098/1341	2730/1732	3541/2247	5047/3192
3000	2079/1333	2732/1740	3525/2237	5068/3216	3000	2421/1547	3150/1999	4086/2593	5824/3683		

# BUDERUS Logatrend VC-, VCM-, C-Profil Heizkörper-Wattleistungen in der Übersicht

Höhe mm	Länge mm	Typ 11 Bautiefe 62 mm	Typ 21 Bautiefe 66 mm	Typ 22 Bautiefe 102 mm	Typ 33 Bautiefe 157 mm
		Wärmeleistung in Watt bei 70/55/20 °C / 55/45/20 °C			
900	400	458/292	584/367	765/482	1069/674
	500	573/365	731/459	957/603	1336/842
	600	688/438	877/551	1148/724	1603/1010
	700	802/511	1023/642	1340/844	1871/1179
	800	917/584	1169/734	1531/965	2138/1347
	900	1031/657	1315/826	1722/1085	2405/1516
	1000	1146/730	1461/918	1914/1206	2672/1684
	1200	1375/876	1753/1101	2296/1447	3207/2021
	1400	1604/1022	2046/1285	2679/1688	3741/2358
	1600	1834/1168	2338/1468	3062/1930	4276/2695
	1800	2063/1314	2630/1652	3445/2171	4810/3031
	2000	2292/1460	2922/1835	3827/2412	5345/3368
	2300	2636/1679	3361/2111	4402/2774	6147/3874
2600	2980/1898	3799/2386	4976/3136	6948/4379	
3000	3438/2189	4384/2753	5741/3618	8017/5052	

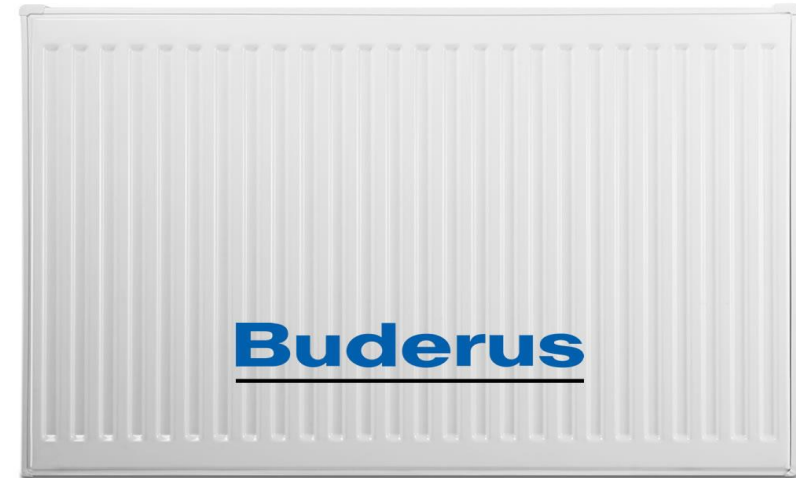

inklusive folgendem Zubehör

