



Siluet

PX-0246-INO

Aplique IP55 Siluet E27 15 acero inoxidable

CARACTERÍSTICAS TÉCNICAS

IP55 IK10



RF
960°C



Potencia total luminaria : 15W

Voltaje / Frecuencia : 100-240V/50-60Hz

Material de la estructura : Acero inoxidable AISI 304

Garantía : 5 Años


Acabado estructura : acero inoxidable

Material del difusor : Policarbonato

Acabado difusor : Mate


Medida máx. de la bombilla : 100/60 mm

Bombilla recomendada : E27



CARACTERÍSTICAS LUMINOTÉCNICAS

Portalámparas	Cantidad	Potencia fuente de luz (W)
E27	1	Potencia máx. 15W



LOGÍSTICA


Peso neto (Kg): 0.62

Peso embalado (Kg): 0.77

Embalaje: 220mm x 100mm x 305mm



6 Un

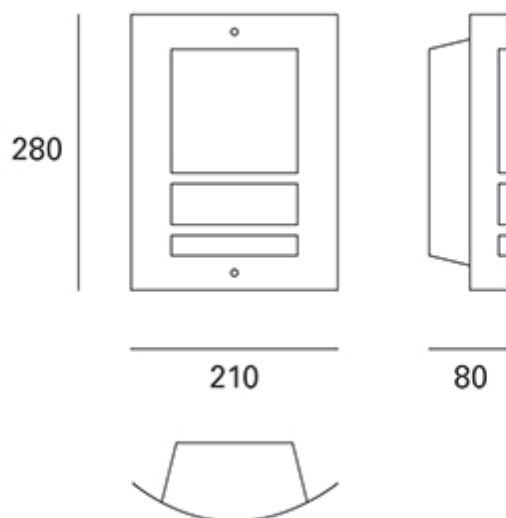

Luminaire


Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal

Measurerm.


Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	280 mm	Width	210 mm	Height	90 mm
Rectangular Luminous Area		Length	280 mm	Width	210 mm	Height	90 mm
Horizontal Luminous Area		0.058800 m2		Emitting area on Plane 180°		0.025200 m2	
Emitting area on Plane 0°		0.025200 m2		Emitting area on Plane 270°		0.018900 m2	
Emitting area on Plane 90°		0.018900 m2		Glare area at 76°		0.038676 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		21-03-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1500.00 lm	
Operator		Asselum		Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	PLEC23	PLEC23	1500.00	23.00	1
C.I.E.	34 61 82 65 45	D DIN 5040	B21		



ULOR 16.07 %
DLOR 29.36 %
RN 35.38 %

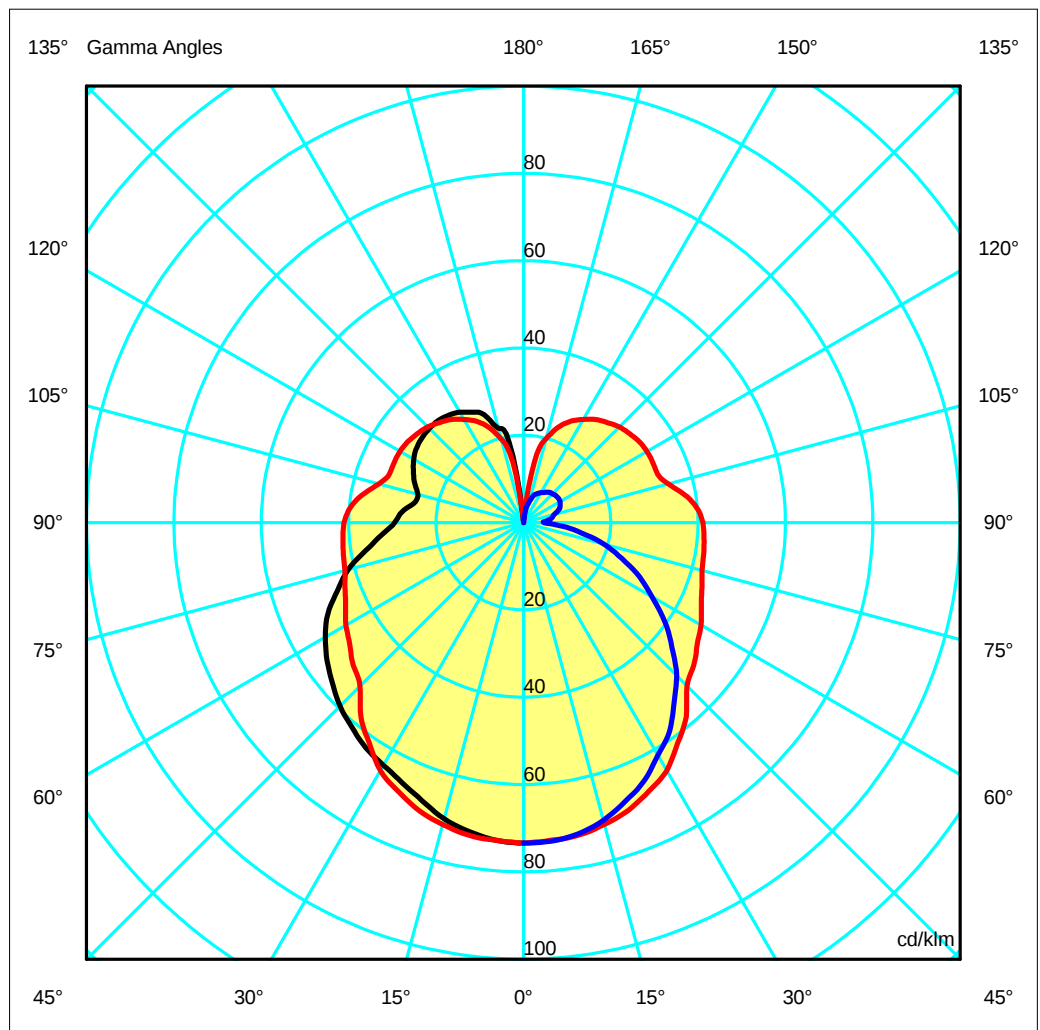

Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal

Measurment

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm		Luminaire Power		23.00 W		Efficacy		29.63 lm/W		Efficiency		45.44%	
Lamps Flux	1500.00 lm		Maximum value		73.40 cd/klm		Position		C=0.00 G=0.00		CG Sym. on planes		270-90	
Luminous Intensity Table cd/klm Table 1/1														
	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	
G 0.0	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	73.40	
G 5.0	72.99	73.16	72.97	73.26	73.12	73.22	73.03	73.20	73.23	73.02	73.13	72.96	73.21	
G 10.0	71.82	72.43	72.02	72.46	72.17	72.48	72.67	72.57	72.82	72.11	72.26	71.80	72.31	
G 15.0	70.21	71.02	70.23	71.26	71.13	71.42	71.52	71.23	71.58	70.71	70.81	70.02	70.57	
G 20.0	67.78	68.95	68.38	68.84	68.99	69.61	70.11	69.57	69.92	68.56	68.39	67.57	67.97	
G 25.0	65.72	66.50	65.80	66.74	66.71	67.74	67.88	67.05	67.34	65.73	66.06	64.46	65.28	
G 30.0	64.11	64.79	63.20	63.48	63.39	64.39	65.55	64.24	64.50	62.40	62.47	61.09	61.54	
G 35.0	62.94	63.30	61.08	60.56	60.17	60.90	61.59	60.46	61.07	58.64	59.21	57.07	58.28	
G 40.0	61.15	61.87	59.12	57.58	55.77	56.91	57.94	56.68	57.13	54.36	54.57	52.79	53.63	
G 45.0	59.39	59.81	56.76	54.78	51.41	52.01	52.92	51.49	52.41	49.94	50.79	47.81	49.58	
G 50.0	57.11	58.05	54.08	51.57	47.76	49.30	50.86	49.08	47.58	44.98	45.48	43.13	44.39	
G 55.0	54.91	55.41	51.63	48.45	46.15	47.42	48.56	47.14	44.79	40.34	40.45	37.57	39.53	
G 60.0	52.39	53.20	48.80	46.77	44.95	45.44	46.94	45.27	42.82	37.56	35.14	33.03	33.97	
G 65.0	49.44	50.18	45.98	45.51	43.68	43.61	44.92	43.35	40.60	35.22	30.47	27.70	29.28	
G 70.0	45.31	47.55	43.95	44.13	42.78	41.98	43.48	41.78	38.67	32.62	27.33	23.11	23.99	
G 75.0	41.59	43.72	42.12	42.95	42.22	41.20	42.32	40.87	37.03	30.63	24.69	17.83	19.19	
G 80.0	36.67	40.17	40.57	42.34	42.24	40.98	41.87	40.37	35.95	29.09	22.08	14.27	13.59	
G 85.0	32.68	36.63	39.56	42.16	42.63	41.39	41.51	39.94	35.28	28.09	20.40	11.68	8.84	
G 90.0	29.51	34.75	38.71	42.18	42.95	41.82	41.08	38.86	34.63	27.38	19.58	10.95	4.72	
G 95.0	27.97	33.13	38.13	42.37	43.24	41.79	39.81	33.98	31.65	25.80	18.97	11.05	5.38	
G100.0	25.54	31.78	37.55	42.08	42.81	41.05	37.37	27.96	26.40	22.60	17.75	11.03	6.60	
G105.0	25.06	29.77	36.63	41.65	41.86	39.74	34.31	22.86	21.10	20.11	16.67	10.61	7.25	
G110.0	26.51	29.16	35.35	40.60	41.02	38.79	32.63	21.13	17.81	16.99	15.12	10.32	8.57	
G115.0	27.82	29.79	34.24	39.26	39.79	37.82	32.65	22.08	17.29	15.78	13.53	9.99	9.26	
G120.0	29.05	30.64	33.10	37.96	38.60	37.04	32.64	23.68	17.87	15.34	12.66	9.78	9.67	
G125.0	29.88	31.35	32.49	36.30	37.06	35.80	32.38	24.66	18.68	15.30	12.33	9.73	9.75	
G130.0	30.31	31.71	31.88	35.02	35.60	34.65	31.74	25.26	19.71	15.76	12.38	9.89	9.65	
G135.0	30.51	31.93	31.35	33.77	33.80	33.18	31.06	25.43	20.39	16.40	12.75	10.23	9.41	
G140.0	30.50	31.95	30.48	32.57	32.42	31.88	29.94	25.22	20.93	16.91	13.08	10.07	9.12	
G145.0	30.03	31.61	29.54	31.08	30.80	30.35	28.88	24.82	21.09	16.65	12.64	9.13	8.49	
G150.0	29.25	30.73	28.35	29.75	29.38	28.64	27.33	23.80	20.51	15.52	11.68	7.79	7.96	
G155.0	27.92	29.52	26.99	27.85	26.66	26.34	25.65	22.40	18.88	13.16	8.74	6.83	7.32	
G160.0	26.32	27.62	24.28	25.07	24.08	23.89	23.26	19.05	15.76	8.43	6.44	5.78	6.62	
G165.0	22.41	24.88	21.16	21.11	19.68	20.45	19.95	15.03	11.06	4.64	4.74	4.64	4.86	
G170.0	18.66	19.83	17.98	16.73	15.80	15.57	13.92	9.03	4.33	3.52	3.62	3.23	3.22	
G175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	



Luminaire

Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal

Measur.

Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG Sym. on planes 270-90	

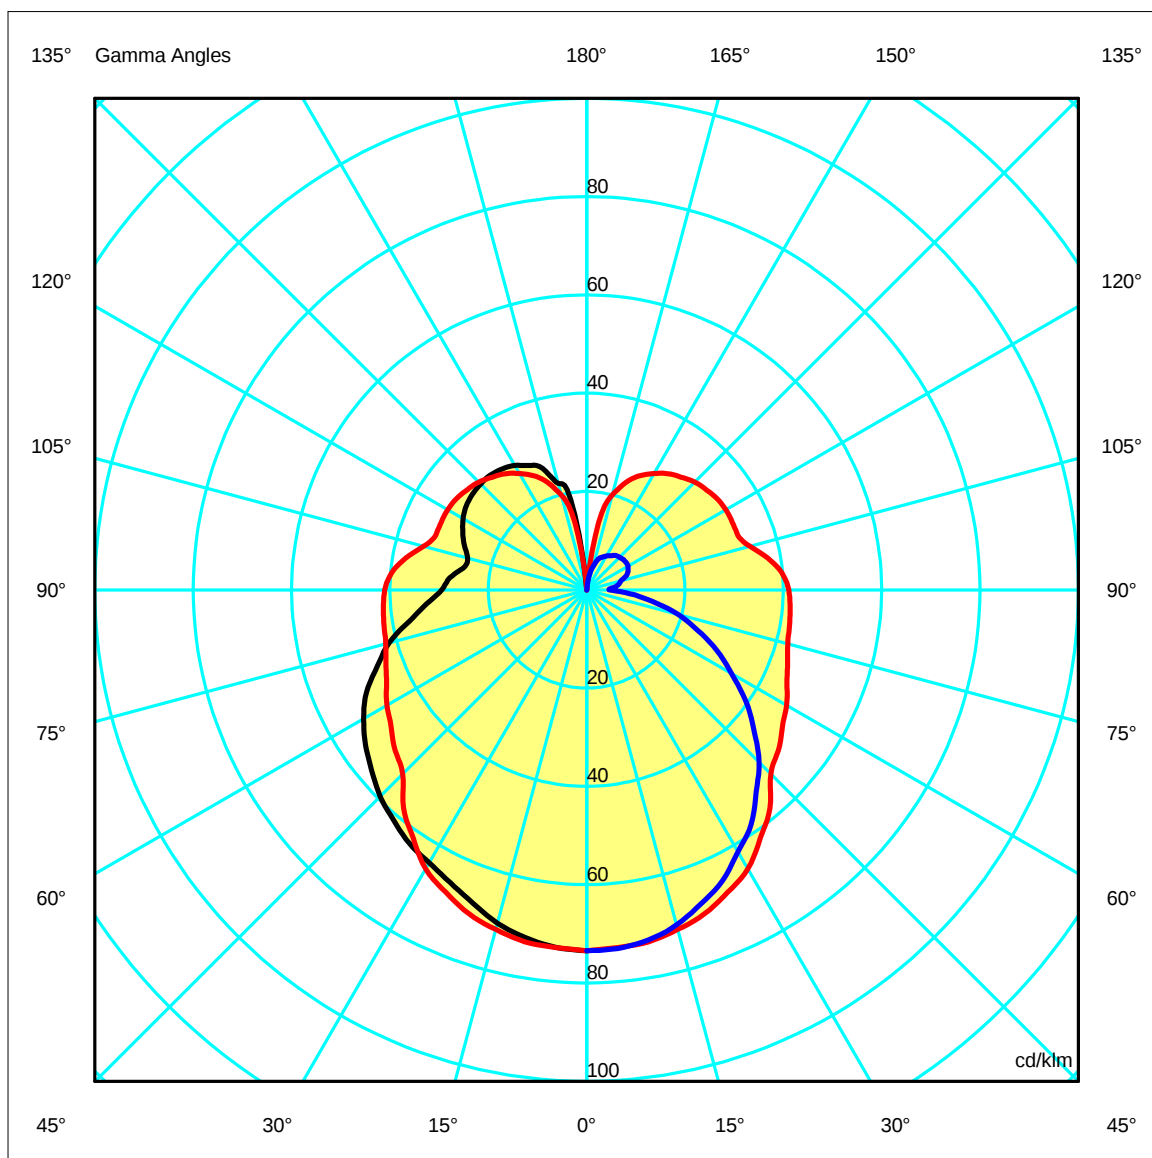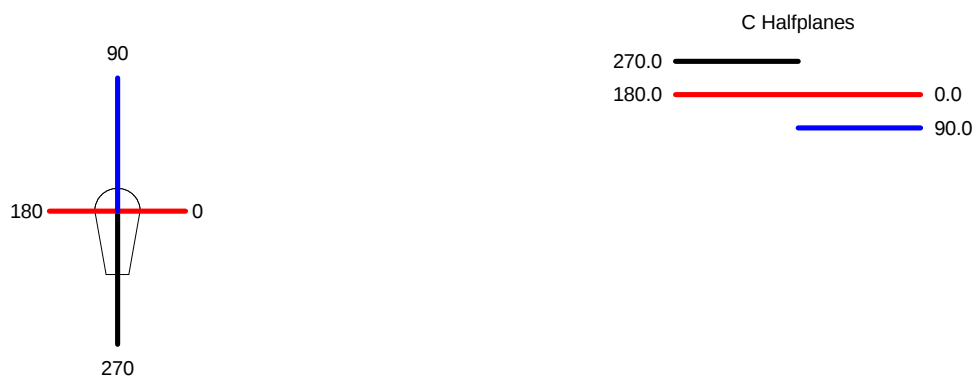

Luminaire

Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal

Measurem.

Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Right beam angle not found, gamma = 0

Right beam angle not found, gamma = 0

Right beam angle not found, gamma = 0

Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal

Measur.

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG Sym. on planes 270-90	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	10.7	11.8	11.5	12.5	14.5	11.8	12.9	12.6	13.6	14.5
x=2H y=3H	13.2	14.2	14.0	15.0	17.0	14.3	15.3	15.1	16.1	17.0
x=2H y=4H	14.6	15.5	15.4	16.3	18.3	15.6	16.5	16.4	17.3	18.3
x=2H y=6H	16.1	16.9	16.9	17.7	19.4	16.8	17.6	17.6	18.4	19.4
x=2H y=8H	16.8	17.6	17.6	18.4	19.9	17.3	18.1	18.2	19.0	19.9
x=2H y=12H	17.6	18.3	18.4	19.2	20.5	17.9	18.6	18.7	19.5	20.5
x=4H y=2H	11.5	12.4	12.3	13.2	15.1	12.5	13.4	13.3	14.1	15.1
x=4H y=3H	14.2	14.9	15.0	15.8	17.8	15.2	15.9	16.0	16.7	17.8
x=4H y=4H	15.7	16.4	16.5	17.2	19.1	16.6	17.2	17.4	18.1	19.1
x=4H y=6H	17.3	17.9	18.2	18.8	20.5	18.0	18.6	18.8	19.4	20.5
x=4H y=8H	18.1	18.7	19.0	19.6	21.2	18.6	19.2	19.5	20.1	21.2
x=4H y=12H	19.0	19.5	19.9	20.4	21.8	19.3	19.8	20.2	20.7	21.8
x=8H y=4H	16.1	16.7	17.0	17.6	19.6	17.0	17.6	17.9	18.5	19.6
x=8H y=6H	18.0	18.5	18.9	19.4	21.2	18.7	19.1	19.6	20.0	21.2
x=8H y=8H	19.0	19.4	19.9	20.3	22.0	19.5	19.9	20.4	20.8	22.0
x=8H y=12H	20.1	20.4	21.0	21.3	22.8	20.3	20.7	21.3	21.6	22.8
x=12H y=4H	16.2	16.7	17.1	17.6	19.6	17.1	17.7	18.0	18.5	19.6
x=12H y=6H	18.2	18.6	19.1	19.5	21.3	18.9	19.3	19.8	20.2	21.3
x=12H y=8H	19.2	19.6	20.2	20.5	22.2	19.8	20.1	20.7	21.1	22.2


Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal


Measur.

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG Sym. on planes 270-90	



C Halfplanes
270.0 ——— 0.0
180.0 ——— 90.0

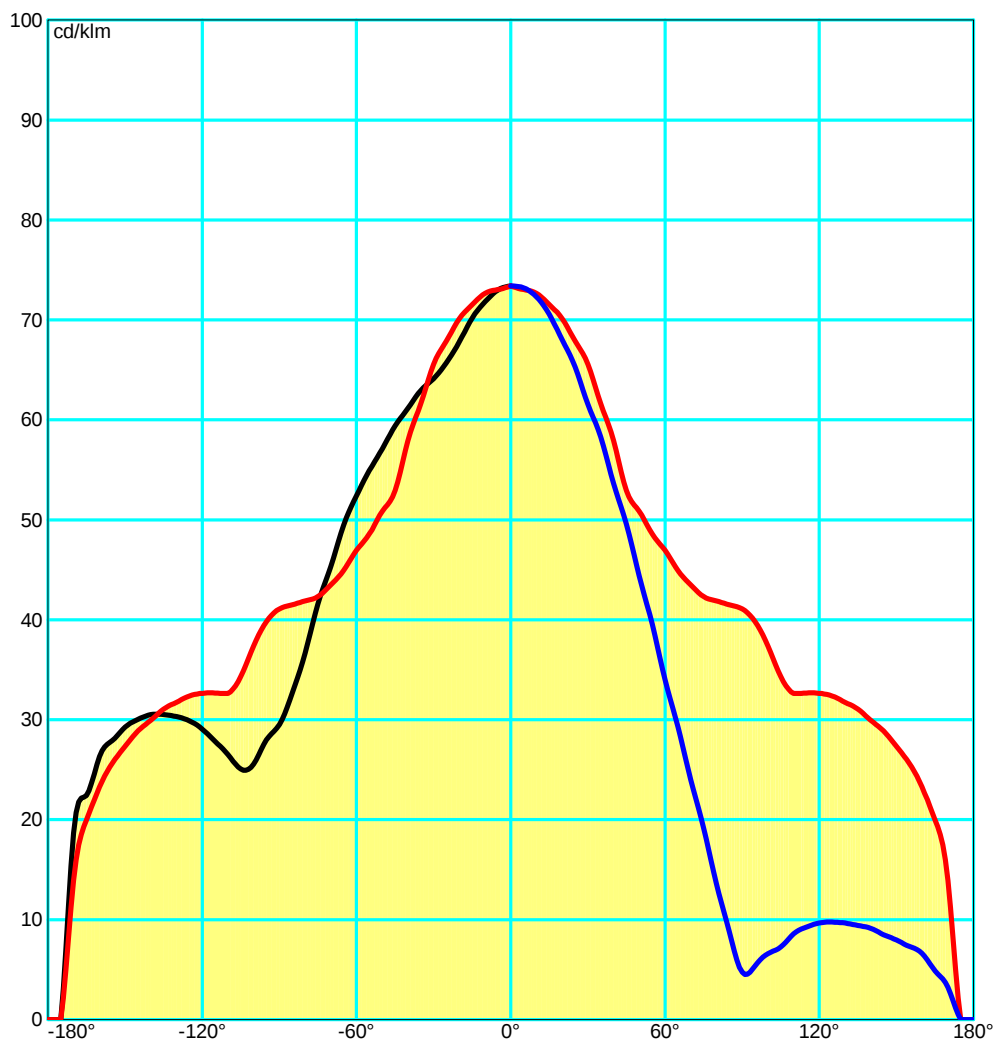

Luminaire


Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal

Measurem.

Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Luminance

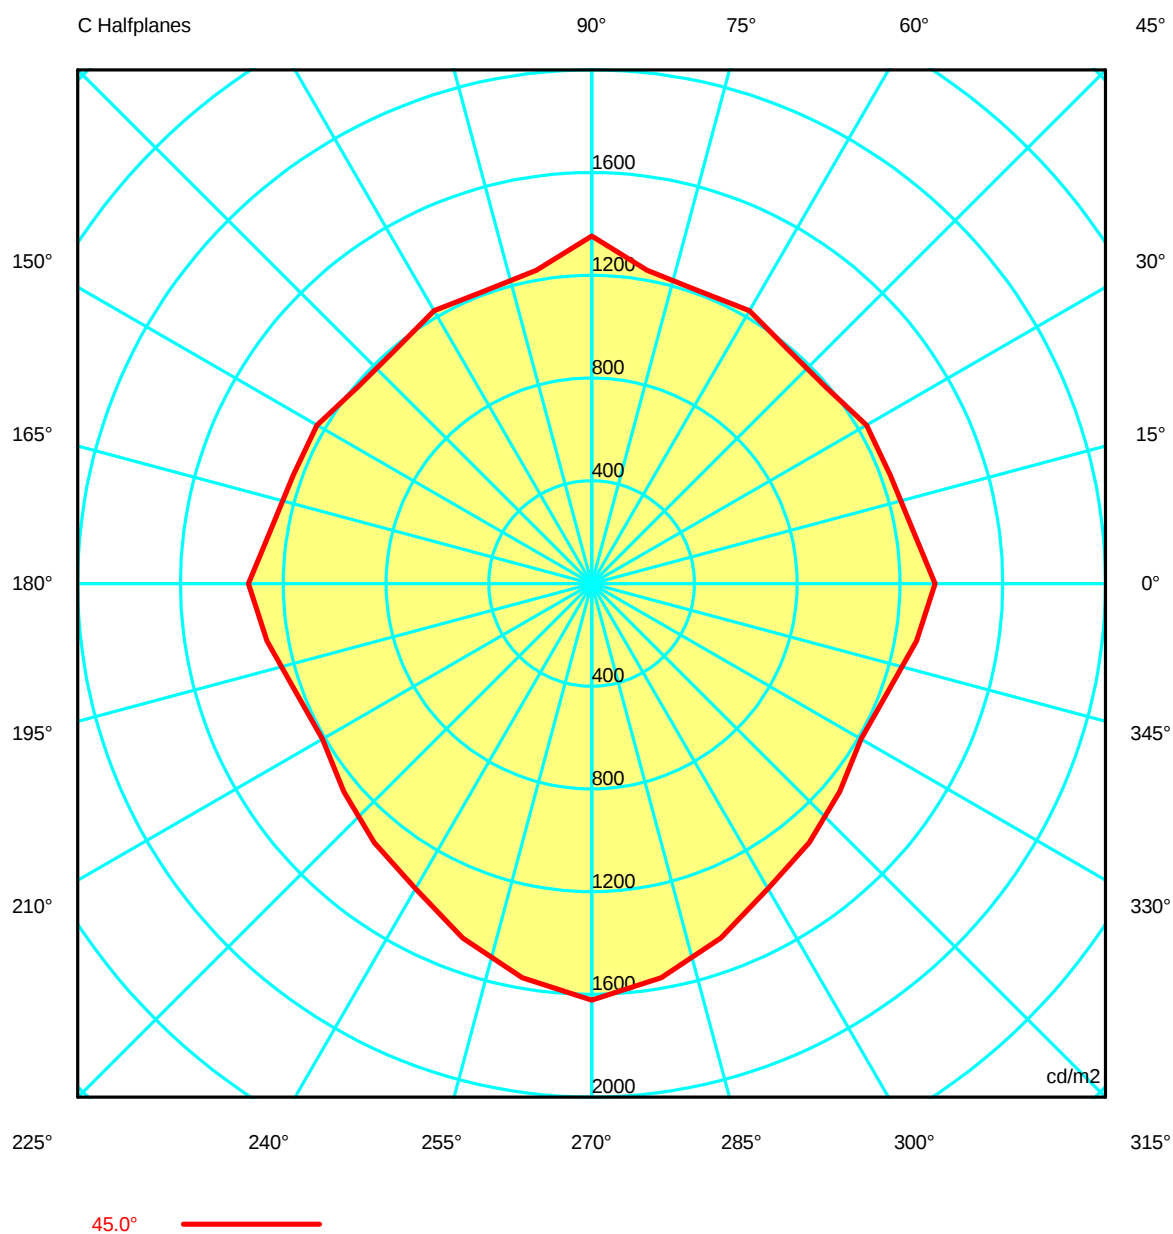

Luminaire

Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal

Measurment

Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux		681.56 lm		Luminaire Power		23.00 W		Efficacy		29.63 lm/W		Efficiency		45.44%	
Lamps Flux		1500.00 lm		Maximum value		73.40 cd/klm		Position		C=0.00 G=0.00		CG Sym. on planes		270-90	
Luminance cd/m2														Table 1/3	
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00		
G 0.0	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37
G 5.0	1802.52	1797.29	1795.24	1791.79	1787.42	1788.98	1795.23	1798.94	1807.44	1823.51	1807.44	1798.94	1795.23	1798.94	1795.23
G 10.0	1750.24	1733.44	1725.98	1724.65	1711.84	1710.58	1722.15	1726.66	1741.14	1772.73	1741.14	1726.66	1722.15	1726.66	1722.15
G 15.0	1694.36	1668.16	1657.35	1654.72	1639.37	1638.04	1651.91	1656.23	1674.30	1715.95	1674.30	1656.23	1651.91	1656.23	1651.91
G 20.0	1646.47	1611.36	1594.73	1590.18	1568.06	1560.88	1574.34	1582.60	1605.51	1652.04	1605.51	1582.60	1574.34	1582.60	1574.34
G 25.0	1592.46	1547.13	1526.27	1518.68	1490.76	1489.07	1512.17	1512.17	1533.82	1597.98	1533.82	1512.17	1512.17	1533.82	1512.17
G 30.0	1547.93	1491.80	1461.91	1453.64	1418.93	1409.95	1432.57	1439.81	1465.99	1528.94	1465.99	1439.81	1432.57	1465.99	1432.57
G 35.0	1475.44	1416.28	1391.19	1385.79	1344.10	1338.86	1371.04	1368.42	1394.61	1481.58	1394.61	1368.42	1371.04	1481.58	1368.42
G 40.0	1419.11	1354.31	1324.41	1315.43	1268.61	1256.36	1285.65	1290.92	1322.19	1406.47	1322.19	1290.92	1285.65	1406.47	1290.92
G 45.0	1336.43	1264.07	1235.80	1234.37	1189.52	1188.56	1227.60	1213.44	1239.54	1353.58	1239.54	1213.44	1227.60	1353.58	1213.44
G 50.0	1336.12	1258.37	1197.61	1155.73	1104.67	1102.82	1137.30	1134.10	1166.63	1273.88	1166.63	1134.10	1137.30	1273.88	1134.10
G 55.0	1339.76	1262.00	1196.31	1132.20	1045.35	1024.06	1055.96	1041.14	1073.93	1205.04	1073.93	1041.14	1055.96	1205.04	1041.14
G 60.0	1374.47	1284.03	1206.70	1137.11	1038.85	977.71	967.47	962.77	1004.52	1113.37	1004.52	962.77	967.47	1113.37	962.77
G 65.0	1413.06	1314.42	1225.50	1144.96	1043.78	953.74	894.30	867.14	913.99	1046.23	913.99	867.14	894.30	1046.23	867.14
G 70.0	1489.24	1373.99	1268.55	1171.97	1048.97	942.31	866.12	804.48	823.98	950.04	823.98	804.48	866.12	950.04	804.48
G 75.0	1604.66	1475.50	1349.46	1222.67	1078.22	960.95	857.41	720.37	698.76	859.95	698.76	720.37	857.41	859.95	720.37
G 80.0	1793.18	1632.34	1474.53	1315.13	1145.12	997.18	855.05	678.63	641.38	707.39	641.38	678.63	855.05	707.39	641.38
G 85.0	2059.59	1847.15	1653.12	1458.84	1258.31	1079.14	900.51	677.63	541.73	553.88	541.73	677.63	900.51	553.88	541.73
G 90.0	2444.94	2124.30	1878.52	1661.12	1428.79	1214.88	1013.67	778.59	562.14	374.29	562.14	778.59	1013.67	374.29	562.14

Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal

Measurerm.

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm			Luminaire Power		23.00 W		Efficacy		29.63 lm/W		Efficiency		45.44%	
Lamps Flux	1500.00 lm			Maximum value		73.40 cd/klm		Position		C=0.00 G=0.00		CG		Sym. on planes 270-90	
Luminance cd/m2														Table 2/3	
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00		
G 0.0	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37
G 5.0	1788.98	1787.42	1791.79	1795.24	1797.29	1802.52	1798.51	1794.00	1789.25	1791.80	1792.16	1791.50	1800.96	1800.96	1800.96
G 10.0	1710.58	1711.84	1724.65	1725.98	1733.44	1750.24	1734.41	1718.13	1709.25	1714.28	1715.69	1716.36	1735.76	1735.76	1735.76
G 15.0	1638.04	1639.37	1654.72	1657.35	1668.16	1694.36	1674.58	1654.93	1644.25	1645.00	1642.68	1638.45	1668.16	1668.16	1668.16
G 20.0	1560.88	1568.06	1590.18	1594.73	1611.36	1646.47	1616.11	1586.54	1569.21	1566.36	1566.04	1573.97	1606.26	1606.26	1606.26
G 25.0	1489.07	1490.76	1518.68	1526.27	1547.13	1592.46	1564.70	1530.07	1504.54	1504.64	1503.82	1506.15	1542.45	1542.45	1542.45
G 30.0	1409.95	1418.93	1453.64	1461.91	1491.80	1547.93	1500.03	1452.32	1428.56	1428.85	1434.94	1449.45	1504.88	1504.88	1504.88
G 35.0	1338.86	1344.10	1385.79	1391.19	1416.28	1475.44	1430.55	1387.08	1365.46	1368.85	1382.48	1414.34	1484.92	1484.92	1484.92
G 40.0	1256.36	1268.61	1315.43	1324.41	1354.31	1419.11	1366.97	1310.76	1284.16	1307.57	1344.83	1393.04	1479.11	1479.11	1479.11
G 45.0	1188.56	1189.52	1234.37	1235.80	1264.07	1336.43	1283.48	1227.19	1210.70	1260.02	1316.50	1371.82	1468.36	1468.36	1468.36
G 50.0	1102.82	1104.67	1155.73	1197.61	1258.37	1336.12	1268.13	1191.49	1160.08	1216.19	1284.28	1352.40	1473.72	1473.72	1473.72
G 55.0	1024.06	1045.35	1132.20	1196.31	1262.00	1339.76	1269.71	1200.37	1166.52	1196.57	1259.54	1347.84	1476.01	1476.01	1476.01
G 60.0	977.71	1038.85	1137.11	1206.70	1284.03	1374.47	1286.69	1215.41	1193.62	1221.54	1266.73	1343.47	1492.99	1492.99	1492.99
G 65.0	953.74	1043.78	1144.96	1225.50	1314.42	1413.06	1316.05	1245.39	1231.73	1266.67	1301.00	1349.69	1504.95	1504.95	1504.95
G 70.0	942.31	1048.97	1171.97	1268.55	1373.99	1489.24	1370.28	1297.98	1296.43	1327.17	1350.87	1392.83	1555.62	1555.62	1555.62
G 75.0	960.95	1078.22	1222.67	1349.46	1475.50	1604.66	1470.23	1396.82	1394.01	1413.48	1424.50	1462.56	1596.29	1596.29	1596.29
G 80.0	997.18	1145.12	1315.13	1474.53	1632.34	1793.18	1631.08	1549.36	1544.87	1551.98	1548.99	1570.93	1676.39	1676.39	1676.39
G 85.0	1079.14	1258.31	1458.84	1653.12	1847.15	2059.59	1872.91	1780.80	1762.77	1753.36	1741.36	1746.29	1800.07	1800.07	1800.07
G 90.0	1214.88	1428.79	1661.12	1878.52	2124.30	2444.94	2219.43	2100.00	2059.79	2039.87	2015.09	2004.51	2056.59	2056.59	2056.59

Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal

Measur.

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG Sym. on planes 270-90	

Luminance cd/m2 Table 3/3

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37	1872.37
G 5.0	1811.33	1817.90	1811.33	1800.96	1791.50	1792.16	1791.80	1789.25	1794.00	1798.51
G 10.0	1753.49	1760.60	1753.49	1735.76	1716.36	1715.69	1714.28	1709.25	1718.13	1734.41
G 15.0	1696.54	1707.17	1696.54	1668.16	1638.45	1642.68	1645.00	1644.25	1654.93	1674.58
G 20.0	1634.31	1647.35	1634.31	1606.26	1573.97	1566.04	1566.36	1569.21	1586.54	1616.11
G 25.0	1581.61	1608.65	1581.61	1542.45	1506.15	1503.82	1504.64	1504.54	1530.07	1564.70
G 30.0	1558.35	1592.94	1558.35	1504.88	1449.45	1434.94	1428.85	1428.56	1452.32	1500.03
G 35.0	1552.03	1599.91	1552.03	1484.92	1414.34	1382.48	1368.85	1365.46	1387.08	1430.55
G 40.0	1554.88	1603.73	1554.88	1479.11	1393.04	1344.83	1307.57	1284.16	1310.76	1366.97
G 45.0	1557.67	1621.49	1557.67	1468.36	1371.82	1316.50	1260.02	1210.70	1227.19	1283.48
G 50.0	1577.91	1638.68	1577.91	1473.72	1352.40	1284.28	1216.19	1160.08	1191.49	1268.13
G 55.0	1589.41	1673.96	1589.41	1476.01	1347.84	1259.54	1196.57	1166.52	1200.37	1269.71
G 60.0	1627.98	1716.97	1627.98	1492.99	1343.47	1266.73	1221.54	1193.62	1215.41	1286.69
G 65.0	1659.13	1766.70	1659.13	1504.95	1349.69	1301.00	1266.67	1231.73	1245.39	1316.05
G 70.0	1708.02	1794.73	1708.02	1555.62	1392.83	1350.87	1327.17	1296.43	1297.98	1370.28
G 75.0	1741.55	1863.88	1741.55	1596.29	1462.56	1424.50	1413.48	1394.01	1396.82	1470.23
G 80.0	1797.17	1908.40	1797.17	1676.39	1570.93	1548.99	1551.98	1544.87	1549.36	1631.08
G 85.0	1895.68	2046.27	1895.68	1800.07	1746.29	1741.36	1753.36	1762.77	1780.80	1872.91
G 90.0	2161.93	2341.83	2161.93	2056.59	2004.51	2015.09	2039.87	2059.79	2100.00	2219.43

Luminaire

Code PX-0246-INO
Name Aplique AJAX PL 23W E27 opal


Measur.

Code PX-246-INO
Name Aplique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 6.2 Tight Tilting Angle:0°

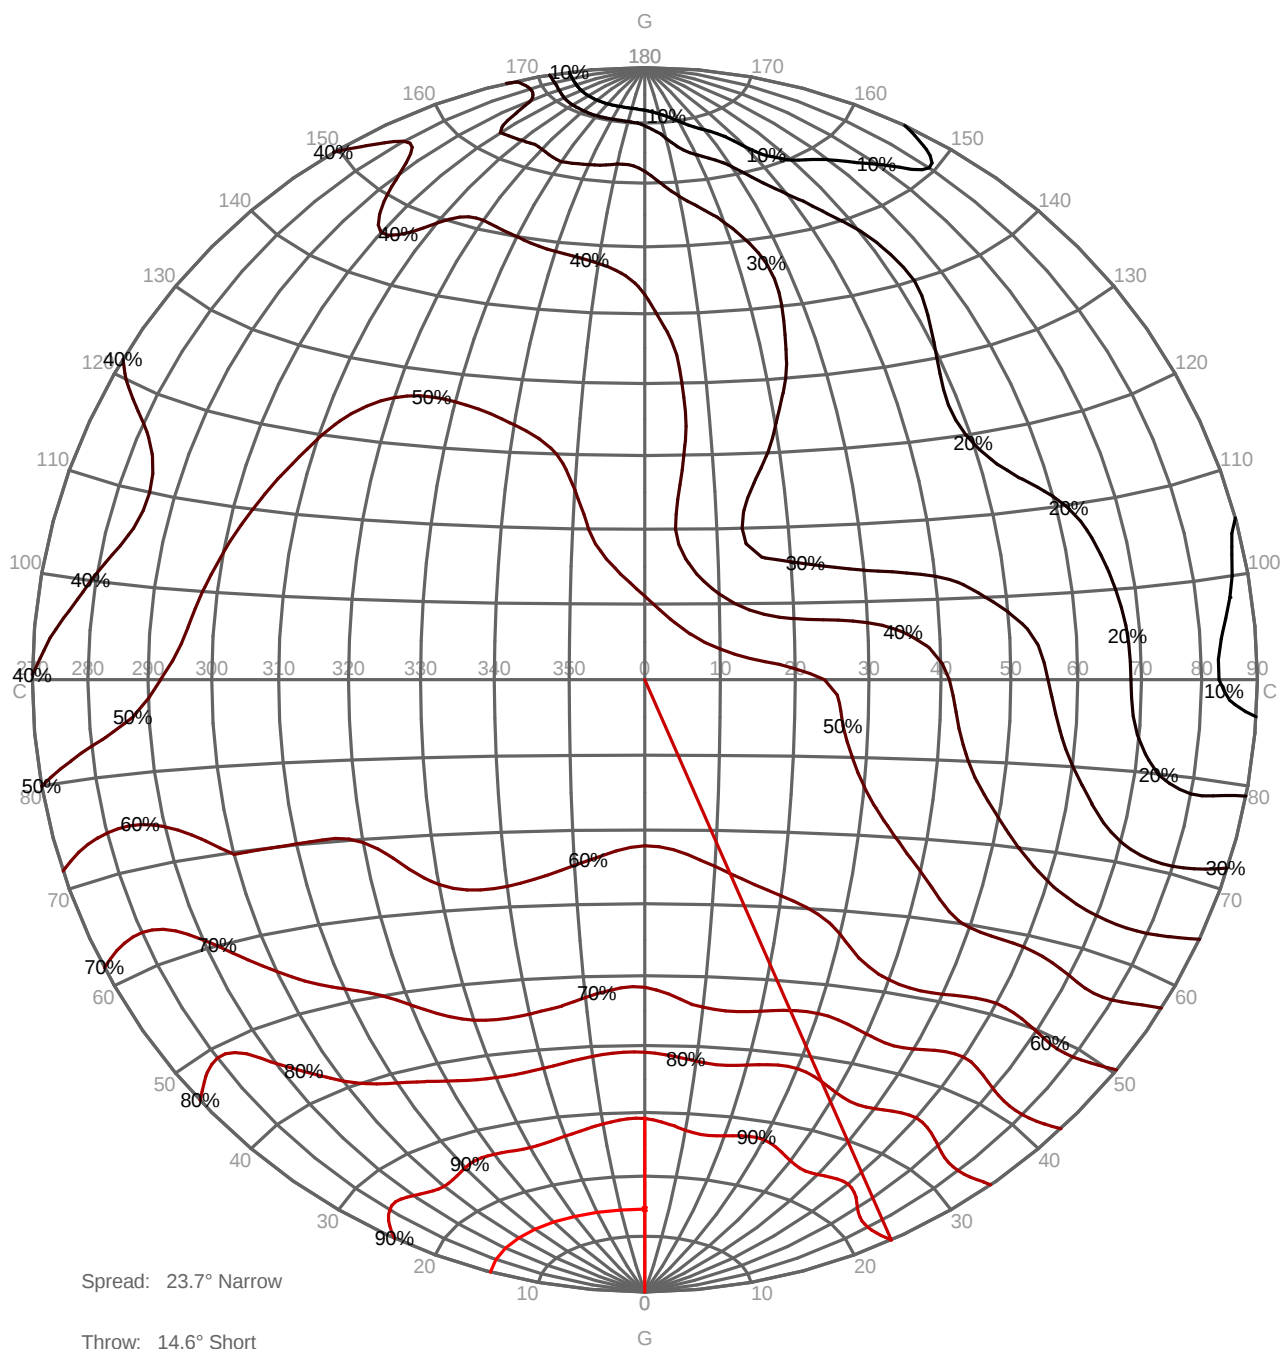

Luminaire

Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal


Measurem.

Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

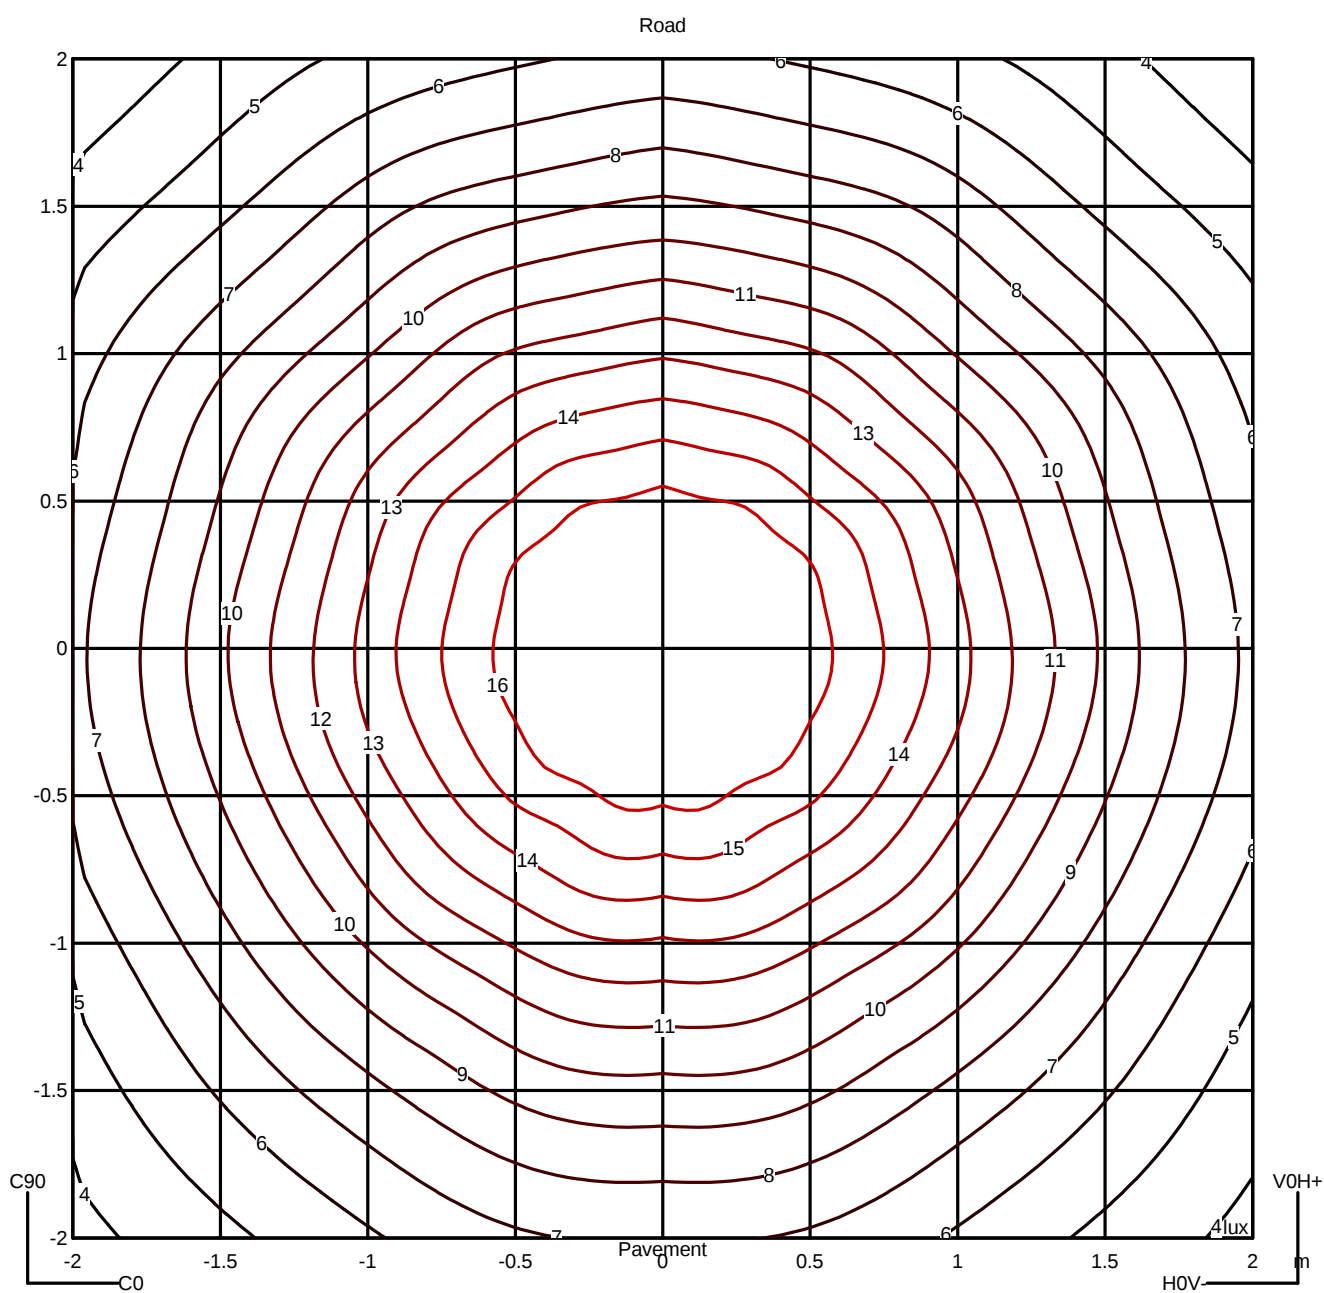

Luminaire

Code PX-0246-INO
Name Applique AJAX PL 23W E27 opal


Measur.


Code PX-246-INO
Name Applique AJAX PL 23W E27 opal

Luminaire Flux	681.56 lm	Luminaire Power	23.00 W	Efficacy	29.63 lm/W	Efficiency	45.44%
Lamps Flux	1500.00 lm	Maximum value	73.40 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

	45°	50°	55°	60°	Average Luminance [cd/m²]					80°	85°	
0.0°	1336	1336	1340	1374	1413	1489	1605	1793	2060	---		
90.0°	1354	1274	1205	1113	1046	950	860	707	554	---		

Flush mounted or transversal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55


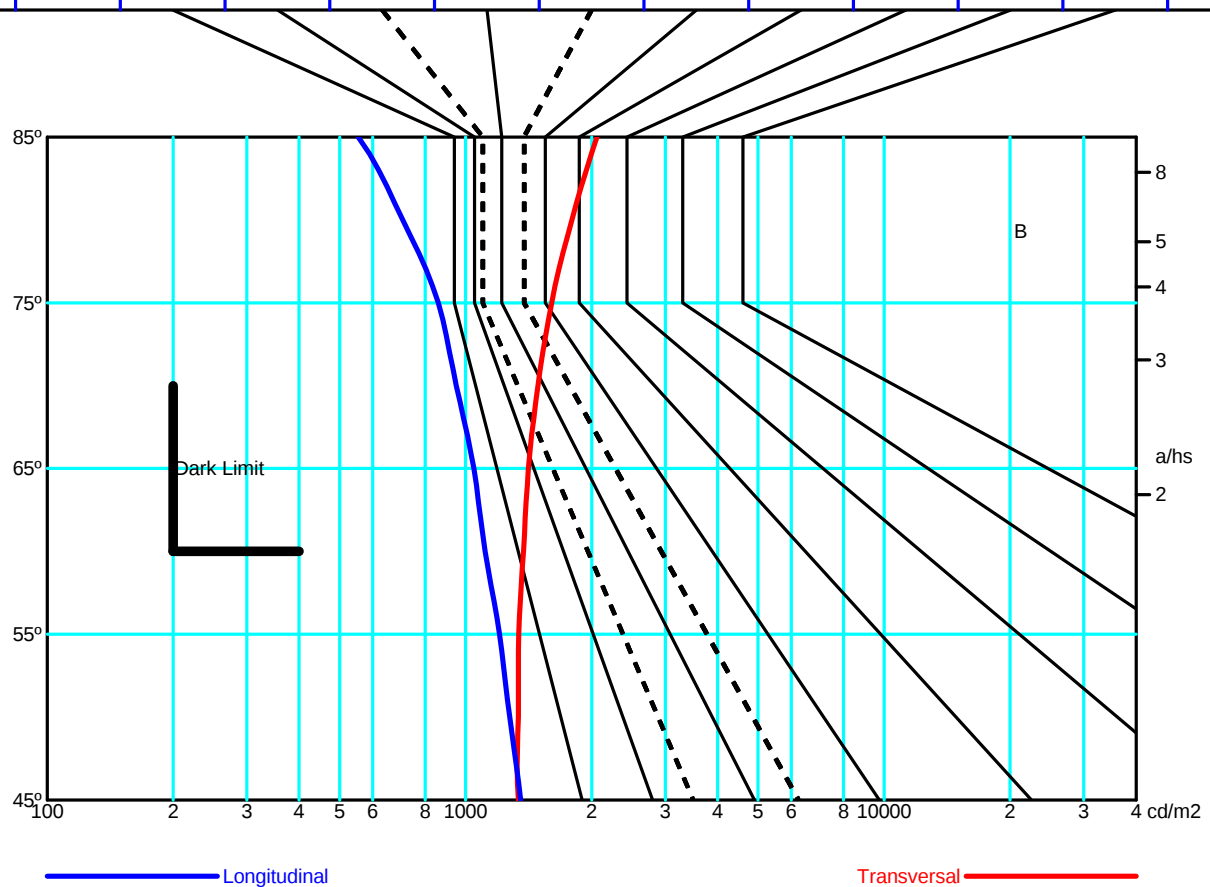


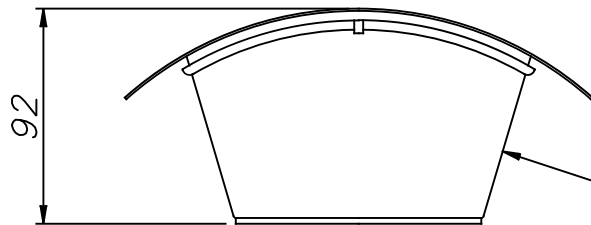

POLICARBONATO BLANCO
WHITE POLYCARBONATE

ACERO INOXIDABLE AISI 304
STAINLESS STEEL AISI 304

POLICARBONATO TRANSPARENTE MATE
TRANSPARENT MATT POLYCARBONATE

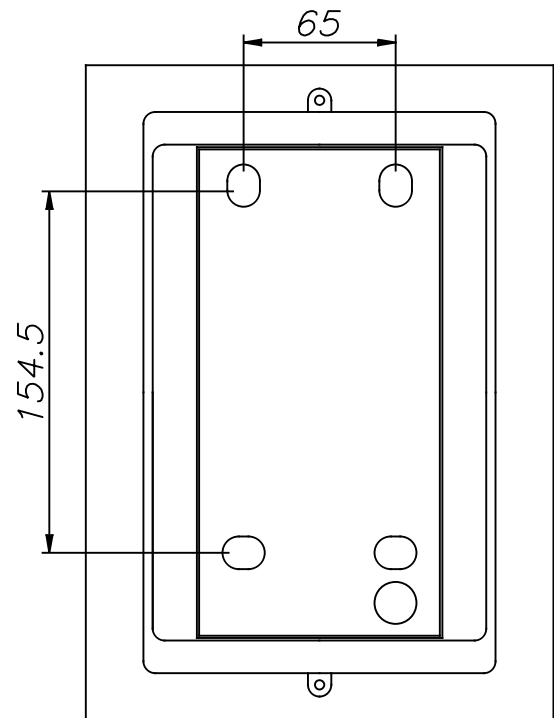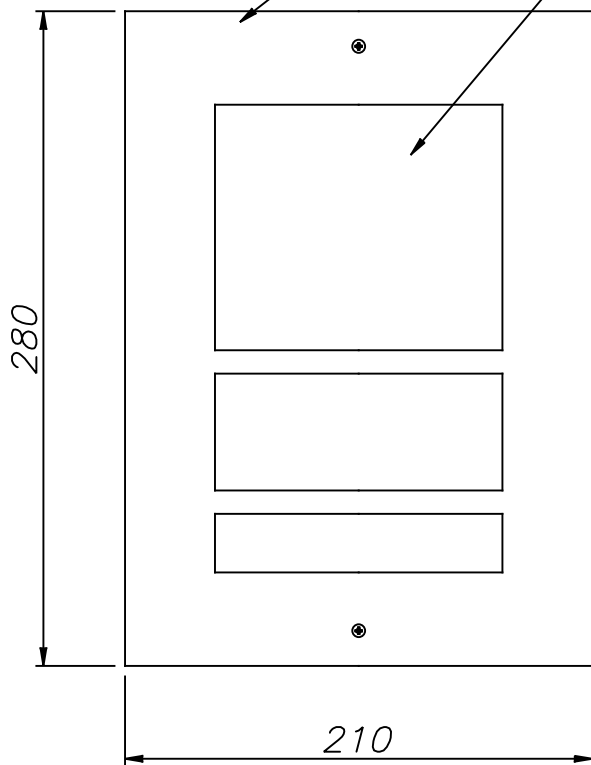

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE



Siluet
PX-0246

FOR
LIGHT

