




Magnet


PX-0529-NEG

Sobremesa IP20 Magnet LED 1.5 Blanco cálido - 2700K ON-OFF Negro 180.00

Instrucciones de montaje
Datos Fotométricos



CARACTERÍSTICAS TÉCNICAS



Potencia total luminaria : 1.5W

Lúmenes reales : 134

Lúmenes nominales : 180

Lm / W reales : 89

Temperatura de color correlacionada (CCT) : Blanco cálido - 2700K

Ángulo Ópticas / Reflector : HORIZONTAL 115°

Material de la estructura : Acero, Aluminio

Acabado estructura : Negro

Material del difusor : Policarbonato

Acabado difusor : Opal

Equipo necesario no incluido :

Voltaje / Frecuencia : 5VDC 1000mA

Protocolo de regulación : ON-OFF

Vida útil : 36.000h L70B30



Garantía : 5 Años

Resistencia ambientes marinos : No

CARACTERÍSTICAS LUMINOTÉCNICAS

CRI: 80
MacAdam steps: 3
Riesgo fotobiológico: RG0

Portalámparas	Cantidad	Potencia fuente de luz (W)
LED	1	1.5W



CARACTERÍSTICAS MÓDULO DE EMERGENCIA

Tipo de batería: Lithium ion

LOGÍSTICA

Peso neto (Kg): 0.69
Peso embalado (Kg): 1.13
Embalaje: 250mm x 150mm x 145mm





**Luminaire**

Code PX-0529-NEG

Name MAGNET

Measur.


Code PX-0529-NEG

Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	100 mm		
Round Luminous Area		Diam.	103 mm	Height	0 mm		
Horizontal Luminous Area		0.008332 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002016 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-11-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		133.86 lm	
Operator		qualitat		Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		PX-0529-NEG		Name PX-0529-NEG		133.86	1.50	1
C.I.E.	46 78 95 100 100			D DIN 5040	A30			
F UTE	1.00 E			B NBN	BZ 5			


Diam=120mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

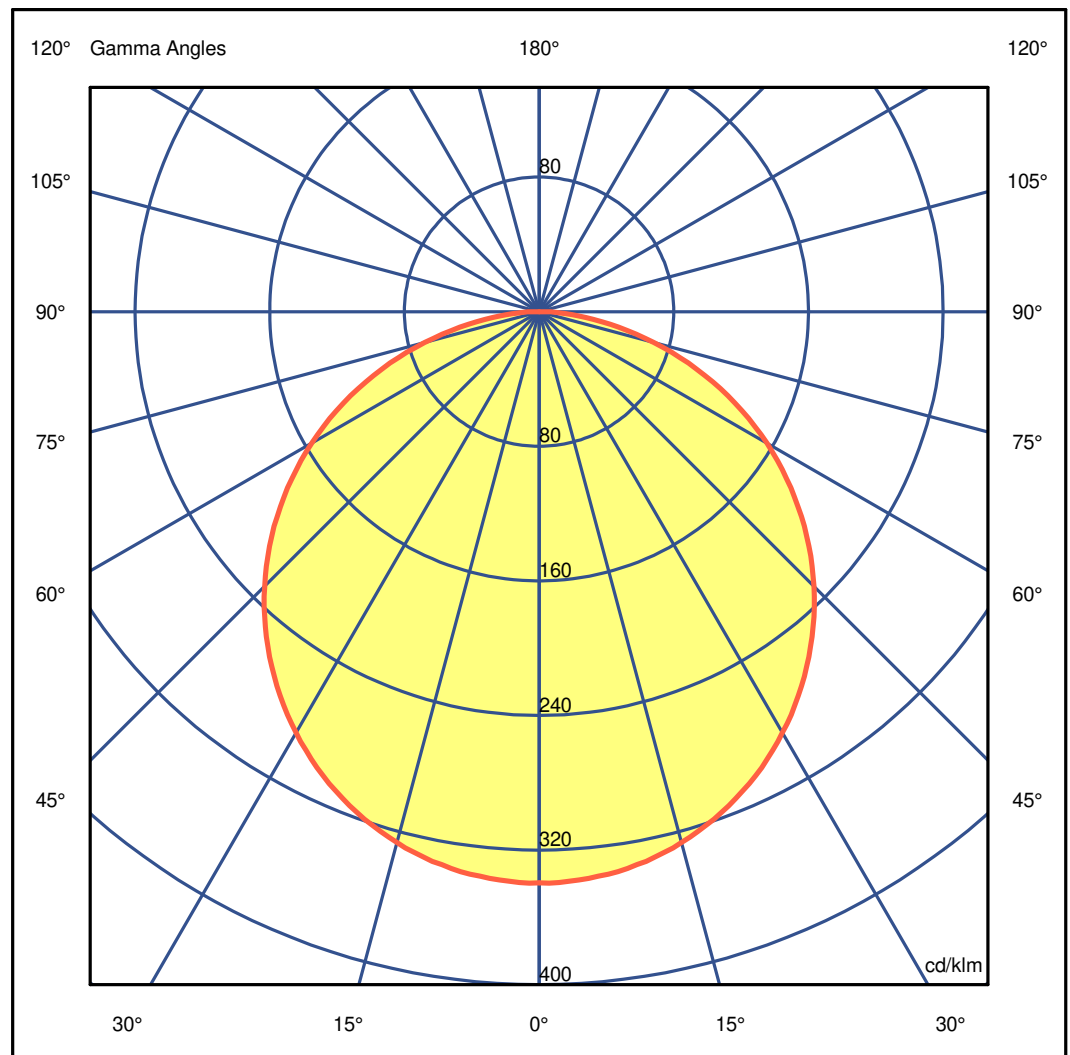

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measurem.

Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd/klm Table 1/1

C 0.00		C 0.00	
G 0.0	339.42	G 46.0	226.21
G 1.0	339.62	G 47.0	221.66
G 2.0	339.33	G 48.0	216.98
G 3.0	338.99	G 49.0	212.20
G 4.0	338.57	G 50.0	207.46
G 5.0	337.93	G 51.0	202.63
G 6.0	337.33	G 52.0	197.61
G 7.0	336.81	G 53.0	192.58
G 8.0	336.03	G 54.0	187.48
G 9.0	334.99	G 55.0	182.47
G 10.0	333.61	G 56.0	177.26
G 11.0	332.68	G 57.0	172.07
G 12.0	331.28	G 58.0	166.93
G 13.0	329.82	G 59.0	161.57
G 14.0	328.43	G 60.0	156.09
G 15.0	326.54	G 61.0	150.64
G 16.0	324.77	G 62.0	145.07
G 17.0	322.92	G 63.0	139.57
G 18.0	320.85	G 64.0	133.96
G 19.0	318.98	G 65.0	128.33
G 20.0	316.67	G 66.0	122.63
G 21.0	314.39	G 67.0	116.89
G 22.0	311.85	G 68.0	111.11
G 23.0	309.38	G 69.0	105.35
G 24.0	306.90	G 70.0	99.50
G 25.0	304.12	G 71.0	93.71
G 26.0	301.42	G 72.0	87.84
G 27.0	298.33	G 73.0	82.10
G 28.0	295.22	G 74.0	76.29
G 29.0	292.21	G 75.0	70.52
G 30.0	288.97	G 76.0	64.81
G 31.0	285.72	G 77.0	59.09
G 32.0	282.38	G 78.0	53.58
G 33.0	278.71	G 79.0	48.10
G 34.0	275.20	G 80.0	42.81
G 35.0	271.56	G 81.0	37.63
G 36.0	267.85	G 82.0	32.67
G 37.0	263.89	G 83.0	27.98
G 38.0	260.17	G 84.0	23.57
G 39.0	255.98	G 85.0	19.59
G 40.0	252.11	G 86.0	15.98
G 41.0	247.93	G 87.0	12.83
G 42.0	243.83	G 88.0	10.20
G 43.0	239.66	G 89.0	8.21
G 44.0	235.22	G 90.0	6.99
G 45.0	230.73		

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measurem.



Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Diam=120mm

C Halfplanes

180.0 ————— 0.0

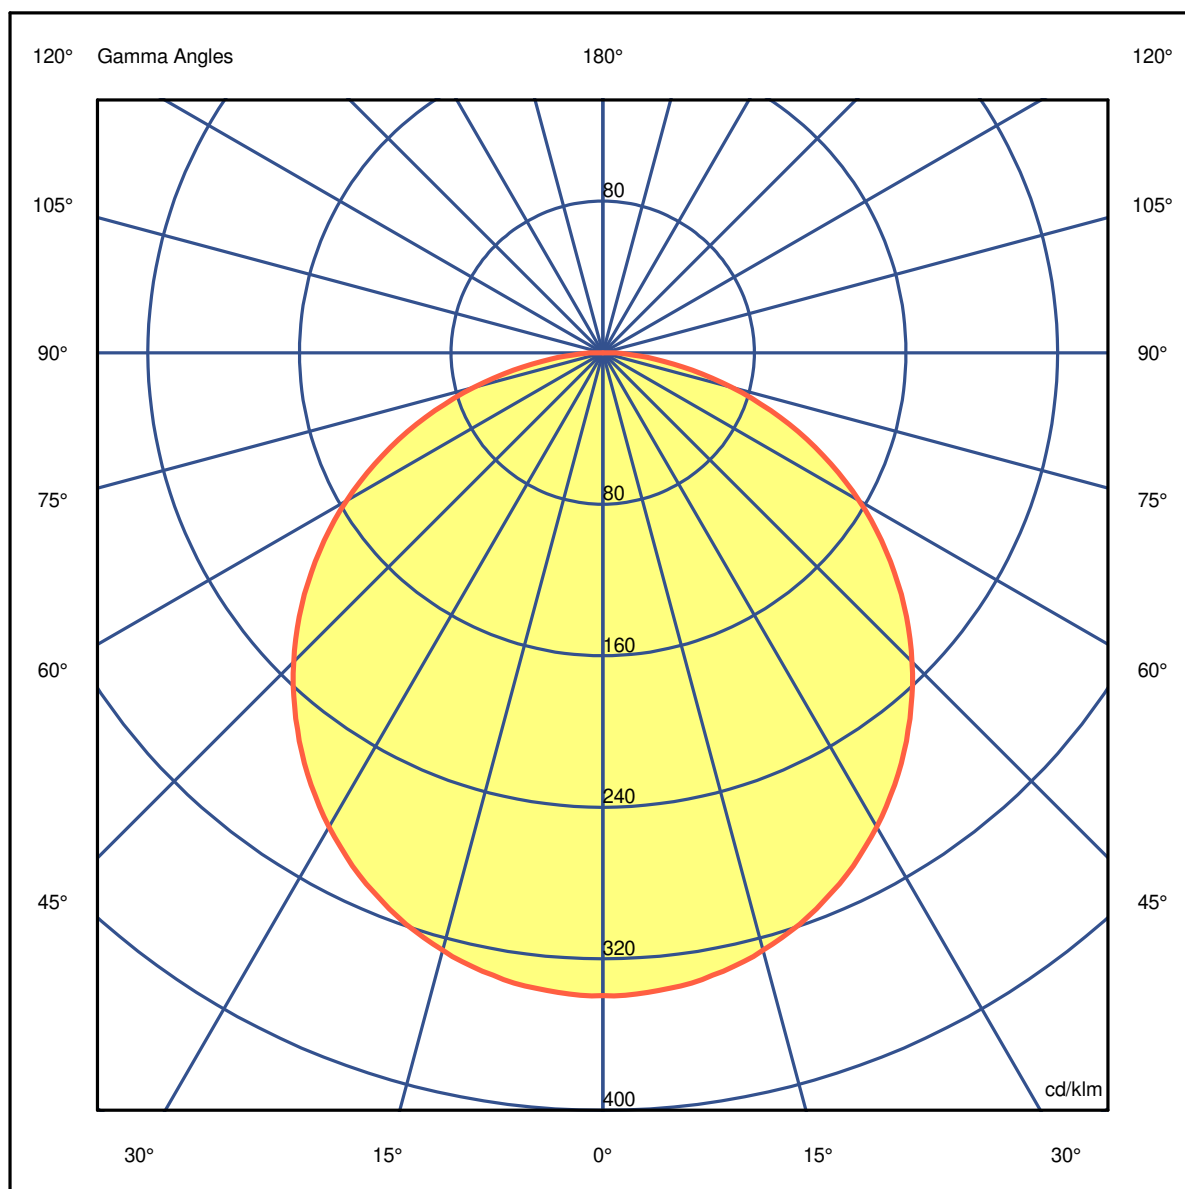

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measurem.



Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG Rotosymmetrical	

Diam=120mm

C Halfplanes

180.0  0.0

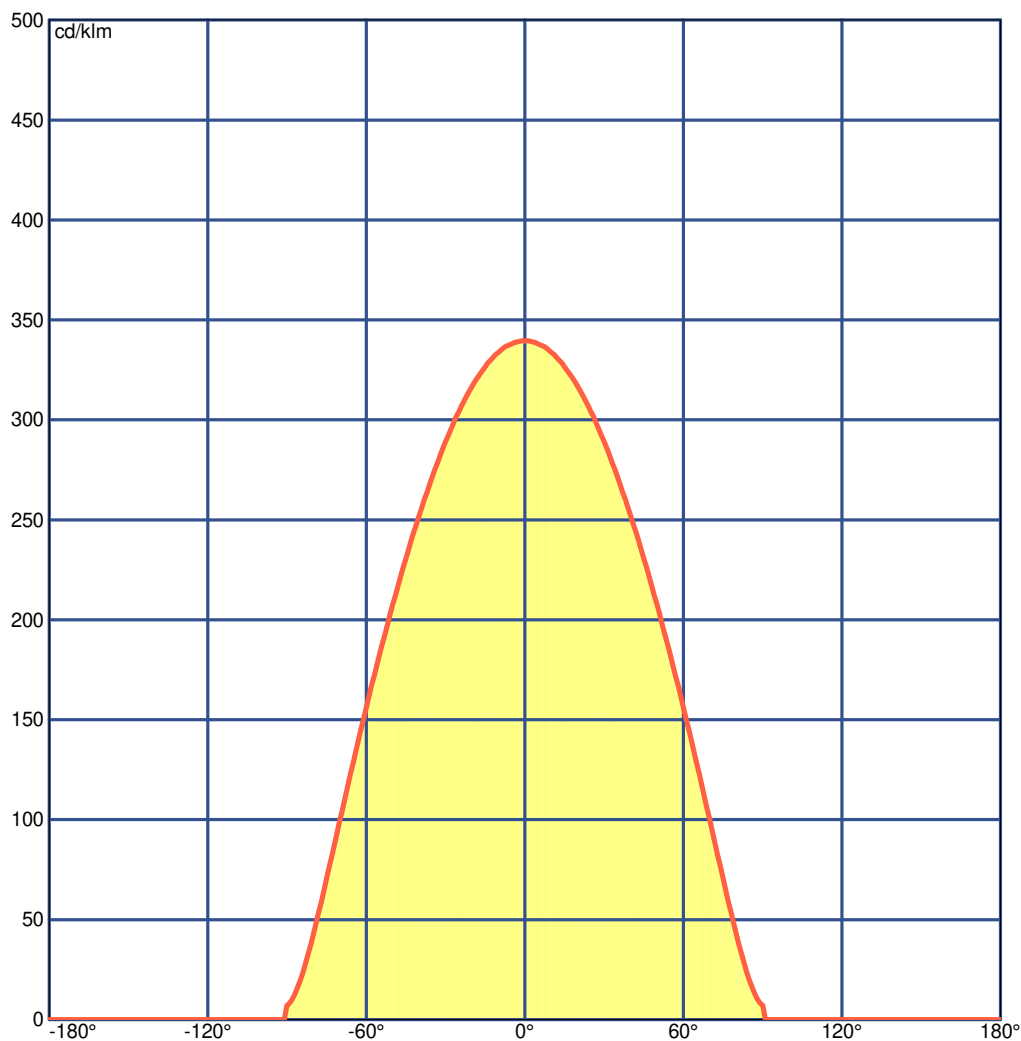

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measurem.

Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	Viewed Crosswise					Viewed Endwise				
x=2H y=2H	18.2	19.5	18.5	19.7	20.0	18.2	19.5	18.5	19.7	20.0
x=2H y=3H	19.9	21.1	20.2	21.4	21.7	19.9	21.1	20.2	21.4	21.7
x=2H y=4H	20.6	21.7	20.9	22.0	22.3	20.6	21.7	20.9	22.0	22.3
x=2H y=6H	21.1	22.2	21.5	22.5	22.8	21.1	22.2	21.5	22.5	22.8
x=2H y=8H	21.3	22.3	21.6	22.6	23.0	21.3	22.3	21.6	22.6	23.0
x=2H y=12H	21.4	22.4	21.8	22.7	23.1	21.4	22.4	21.8	22.7	23.1
x=4H y=2H	19.0	20.1	19.3	20.4	20.7	19.0	20.1	19.3	20.4	20.7
x=4H y=3H	20.9	21.9	21.2	22.2	22.5	20.9	21.9	21.2	22.2	22.5
x=4H y=4H	21.7	22.6	22.1	22.9	23.3	21.7	22.6	22.1	22.9	23.3
x=4H y=6H	22.3	23.1	22.7	23.5	23.9	22.3	23.1	22.7	23.5	23.9
x=4H y=8H	22.5	23.3	23.0	23.7	24.1	22.5	23.3	23.0	23.7	24.1
x=4H y=12H	22.7	23.4	23.2	23.8	24.2	22.7	23.4	23.2	23.8	24.2
x=8H y=4H	22.0	22.8	22.5	23.2	23.6	22.0	22.8	22.5	23.2	23.6
x=8H y=6H	22.8	23.4	23.3	23.8	24.3	22.8	23.4	23.3	23.8	24.3
x=8H y=8H	23.1	23.6	23.6	24.1	24.6	23.1	23.6	23.6	24.1	24.6
x=8H y=12H	23.4	23.8	23.9	24.3	24.8	23.4	23.8	23.9	24.3	24.8
x=12H y=4H	22.1	22.7	22.5	23.1	23.6	22.1	22.7	22.5	23.1	23.6
x=12H y=6H	22.9	23.4	23.4	23.9	24.3	22.9	23.4	23.4	23.9	24.3
x=12H y=8H	23.3	23.7	23.8	24.2	24.7	23.3	23.7	23.8	24.2	24.7

**Luminaire**

Code PX-0529-NEG

Name MAGNET

Measurerm.

Code PX-0529-NEG

Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG Rotosymmetrical	

Total Flux=133.86 Luminaire Flux=133.86

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.30	0.38	0.45	0.53	0.58	0.67	0.73	0.77	0.82	0.85	0.92	0.96
RC	5	5	5	5	5	5	5	5	5	5	5	5

Zonal Flux per 1000 Lumen


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	32	124	264	434	612	775	902	977	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

CIE Flux Codes

46 78 95 100 100

C.I.E. 5
D DIN 5040 A30
F UTE 1.00 E
B NBN BZ 5
RN 0.00000 %
BLF 1.0

LOR 100.00000 %
ULOR 0.00000 %
DLOR 100.00000 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

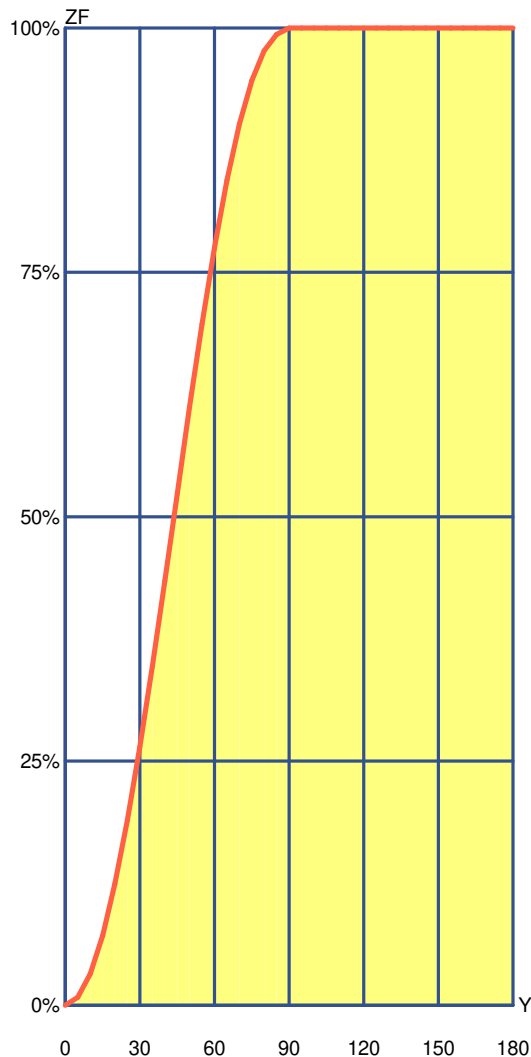

Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	8.10	8.10	0.81 %	0.81 %
10°	24.04	32.14	2.40 %	3.21 %
15°	39.18	71.32	3.92 %	7.13 %
20°	53.01	124.33	5.30 %	12.43 %
25°	65.10	189.43	6.51 %	18.94 %
30°	75.05	264.49	7.51 %	26.45 %
35°	82.54	347.03	8.25 %	34.70 %
40°	87.35	434.38	8.73 %	43.44 %
45°	89.41	523.79	8.94 %	52.38 %
50°	88.54	612.33	8.85 %	61.23 %
55°	84.76	697.09	8.48 %	69.71 %
60°	78.27	775.36	7.83 %	77.54 %
65°	69.13	844.49	6.91 %	84.45 %
70°	57.68	902.17	5.77 %	90.22 %
75°	44.40	946.57	4.44 %	94.66 %
80°	30.19	976.75	3.02 %	97.68 %
85°	16.62	993.38	1.66 %	99.34 %
90°	6.62	1000.00	0.66 %	100.00 %
95°	0.00	1000.00	0.00 %	100.00 %
100°	0.00	1000.00	0.00 %	100.00 %
105°	0.00	1000.00	0.00 %	100.00 %
110°	0.00	1000.00	0.00 %	100.00 %
115°	0.00	1000.00	0.00 %	100.00 %
120°	0.00	1000.00	0.00 %	100.00 %
125°	0.00	1000.00	0.00 %	100.00 %
130°	0.00	1000.00	0.00 %	100.00 %
135°	0.00	1000.00	0.00 %	100.00 %
140°	0.00	1000.00	0.00 %	100.00 %
145°	0.00	1000.00	0.00 %	100.00 %
150°	0.00	1000.00	0.00 %	100.00 %
155°	0.00	1000.00	0.00 %	100.00 %
160°	0.00	1000.00	0.00 %	100.00 %
165°	0.00	1000.00	0.00 %	100.00 %
170°	0.00	1000.00	0.00 %	100.00 %
175°	0.00	1000.00	0.00 %	100.00 %
180°	0.00	1000.00	0.00 %	100.00 %

**Luminaire**Code PX-0529-NEG
Name MAGNET**Measurem.**Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG Rotosymmetrical	

Utilizations CIE

Mounting	Direct				Normalization			Normalised			Suspension Ratid/3								Standard CIE Settings							
	Ceiling																									
K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000			
0.60	219	196	173	156	187	149	112	95	88	75	47	35	17	12	70	38	33	14	11	32	12	10	0			
0.80	253	232	185	170	221	163	141	123	101	89	57	45	23	17	83	47	43	20	16	40	17	15	0			
1.00	276	257	187	175	244	167	164	146	108	97	63	52	29	22	91	54	50	25	21	47	22	20	0			
1.25	296	279	184	175	265	168	187	170	113	103	70	59	36	29	97	61	56	31	27	54	28	25	0			
1.50	310	295	180	172	281	166	206	189	115	107	75	65	41	34	101	66	62	37	33	59	33	30	0			
2.00	328	315	169	164	300	158	234	219	116	109	81	72	51	44	104	73	69	46	42	66	42	39	0			
2.50	339	328	161	156	313	152	255	241	116	110	85	78	58	51	105	78	75	54	50	72	50	46	0			
3.00	347	337	154	150	322	146	270	258	115	110	88	82	64	58	105	81	78	59	56	75	56	52	0			
4.00	358	350	145	142	335	139	292	282	114	111	92	87	72	67	106	86	84	68	64	81	64	61	0			
5.00	365	359	139	137	343	134	307	298	114	111	95	91	78	73	107	90	88	74	71	85	70	67	0			
10.00	379	376	125	124	361	122	340	335	111	110	101	99	91	88	107	97	96	88	86	93	84	82	0			
20.00	387	385	117	117	370	115	359	356	109	109	104	103	99	97	106	101	100	96	95	98	93	91	0			

Wall

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	472	460	414	406	454	401	357	350	324	318	271	267	234	232	315	268	266	232	231	265	232	231	211
0.80	532	519	454	445	510	439	415	406	367	361	315	309	275	273	356	309	307	274	272	306	272	271	247
1.00	572	560	475	468	548	461	457	447	394	388	344	339	305	302	383	338	336	303	301	334	301	300	273
1.25	607	595	492	486	581	478	496	485	418	412	371	365	333	330	405	364	362	330	328	358	328	326	296
1.50	632	621	502	497	605	489	525	514	434	429	390	385	355	351	421	383	380	351	349	377	348	345	313
2.00	658	648	505	500	629	493	560	550	448	443	410	405	378	374	434	401	399	373	371	394	369	366	329
2.50	673	665	504	500	644	492	583	573	454	450	422	417	393	389	441	412	410	387	385	405	382	378	339
3.00	682	674	500	498	652	490	598	588	457	454	428	423	403	398	444	418	417	396	393	410	390	385	344
4.00	698	692	501	499	668	491	623	615	465	462	441	437	420	416	452	431	429	412	410	422	405	399	355
5.00	710	705	503	501	679	494	641	634	472	469	451	448	433	429	458	441	439	425	422	431	417	410	364
10.00	736	732	505	504	704	497	682	677	485	484	473	471	462	459	472	462	461	452	450	451	442	434	383
20.00	739	738	496	496	707	489	695	692	482	482	476	475	469	468	470	464	463	458	457	453	448	438	385

Working Pl.

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	588	575	549	539	567	533	450	442	433	428	366	362	317	316	424	362	360	316	315	359	315	314	297
0.80	696	681	641	631	669	623	552	541	526	519	457	451	405	402	513	451	448	403	401	446	401	400	381
1.00	780	765	711	702	750	692	636	624	601	594	533	526	481	477	585	525	522	477	475	519	475	473	454
1.25	860	845	775	767	826	755	718	705	672	665	608	600	556	551	654	598	595	552	549	590	548	545	527
1.50	920	905	821	814	883	802	781	767	726	718	665	657	615	609	706	653	650	609	606	644	604	600	583
2.00	1000	993	887	881	966	868	878	864	805	798	752	744	707	701	784	738	735	699	696	727	692	687	671
2.50	1000	1000	927	922	1000	909	942	929	855	850	809	802	769	762	834	794	791	759	756	781	751	744	729
3.00	1000	1000	954	950	1000	937	989	976	891	886	850	843	814	807	869	834	831	803	799	820	793	785	771
4.00	1000	1000	987	984	1000	971	1000	1000	934	930	901	895	871	864	912	884	881	858	854	868	846	836	822
5.00	1000	1000	1000	1000	1000	992	1000	1000	961	958	933	927	907	901	938	914	912	892	889	898	879	867	854
10.00	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	997	985	981	994	980	979	967	965	961	950	935
20.00	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	996	990	972	961

LM53 SHR C0-C180: 1.262 SHR C90-C270: 1.262 SHR Square: 1.389



Luminaire

Code PX-0529-NEG

Name MAGNET

Measurement

Code PX-0529-NEG


Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.57	3.13	4.70	6.26	7.83	OC	1.57	3.13	4.70	6.26	7.83
OB	1.57	3.13	4.70	6.26	7.83	OD	1.57	3.13	4.70	6.26	7.83

	0	5	15	25	35	45	55	65	75	85
OA	45.44	45.24	43.71	40.71	36.35	30.89	24.42	17.18	9.44	2.62
OB	45.44	45.24	43.71	40.71	36.35	30.89	24.42	17.18	9.44	2.62
OC	45.44	45.24	43.71	40.71	36.35	30.89	24.42	17.18	9.44	2.62
OD	45.44	45.24	43.71	40.71	36.35	30.89	24.42	17.18	9.44	2.62

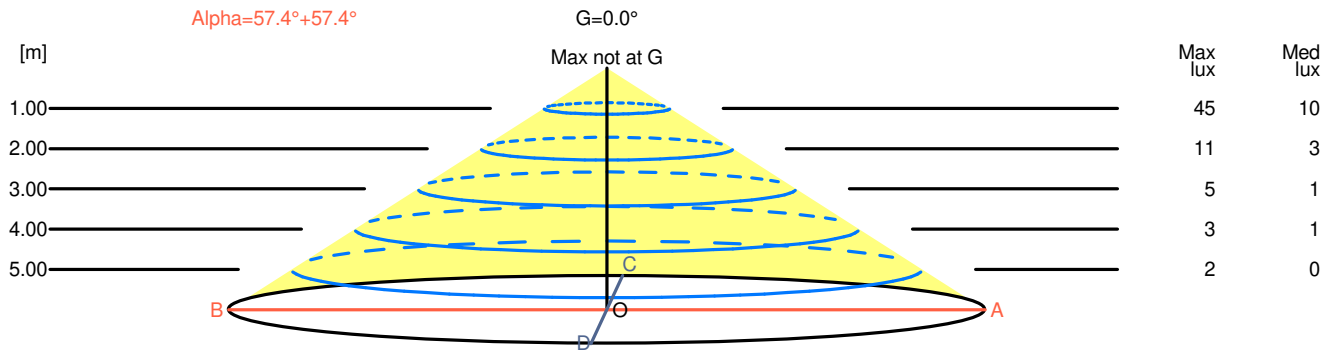

H[m]	D[m]	Max lux	Med lux	Alpha=57.4°+57.4°	G=0.0 Max not at G	
1.00	3.13	45	10			
2.00	6.26	11	3			
3.00	9.40	5	1			
4.00	12.53	3	1			
5.00	15.66	2	0			

**Luminaire**

Code PX-0529-NEG
Name MAGNET


Measurement

Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG Rotosymmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

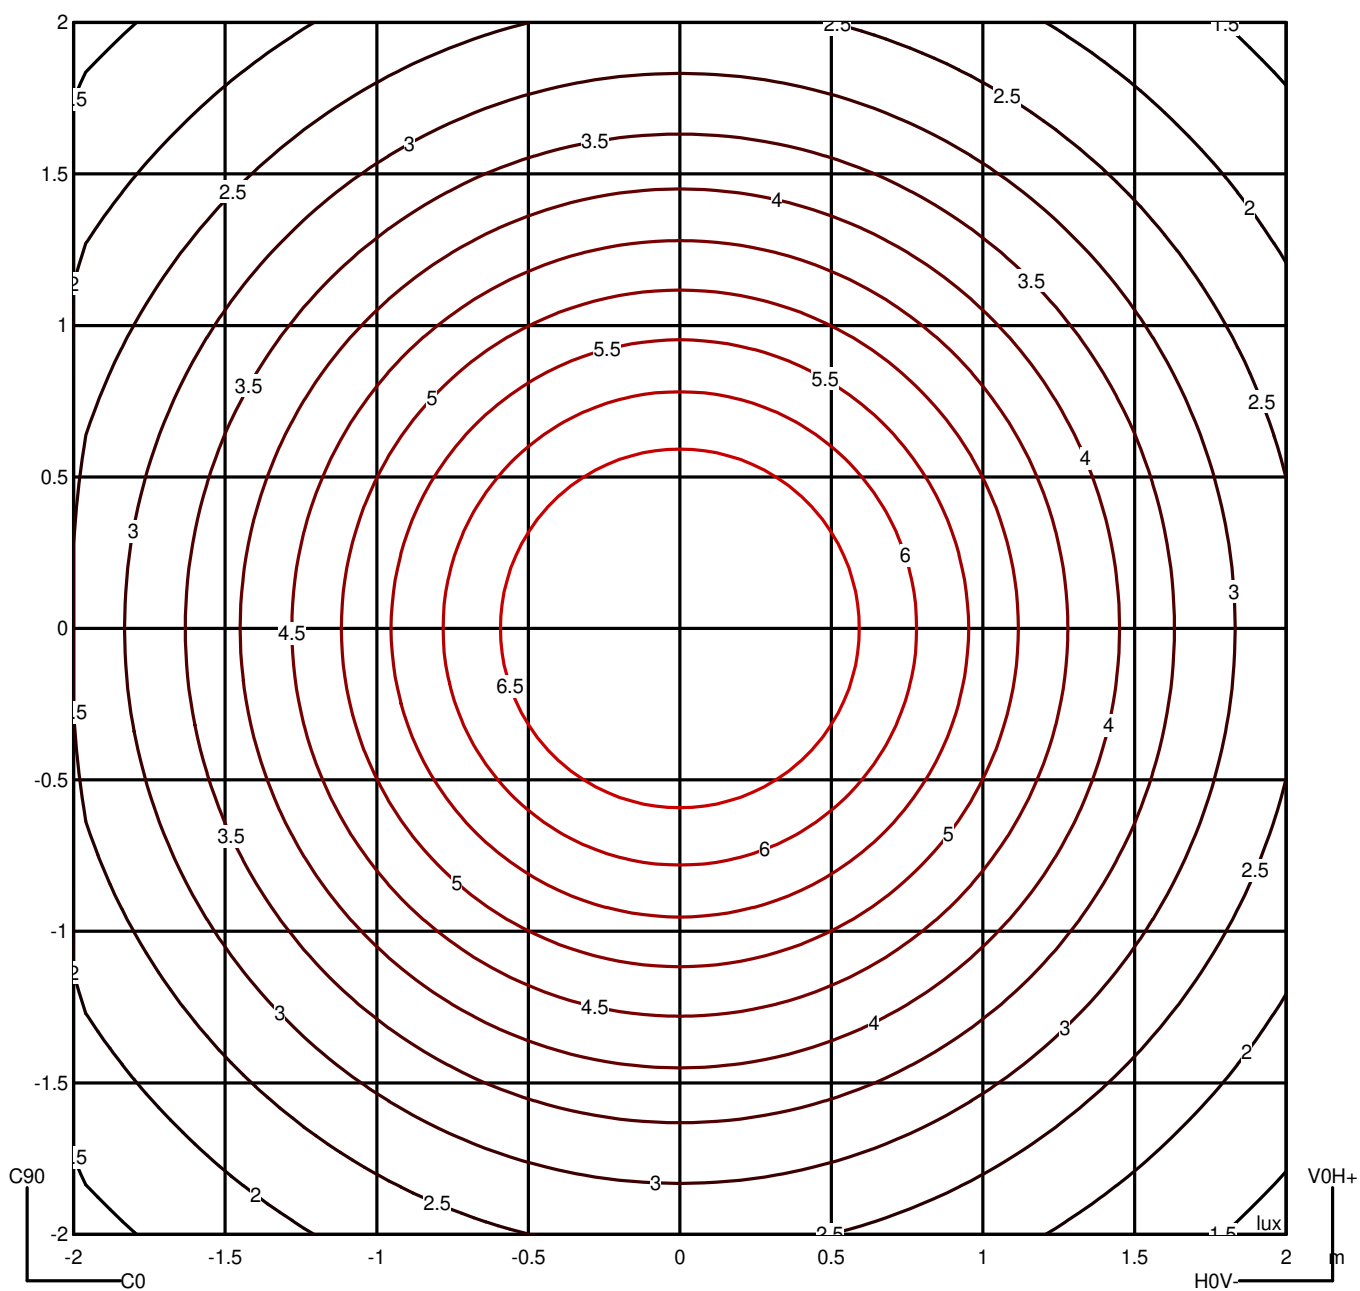

**Luminaire**

Code PX-0529-NEG

Name MAGNET


Measurem.

Code PX-0529-NEG

Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminance

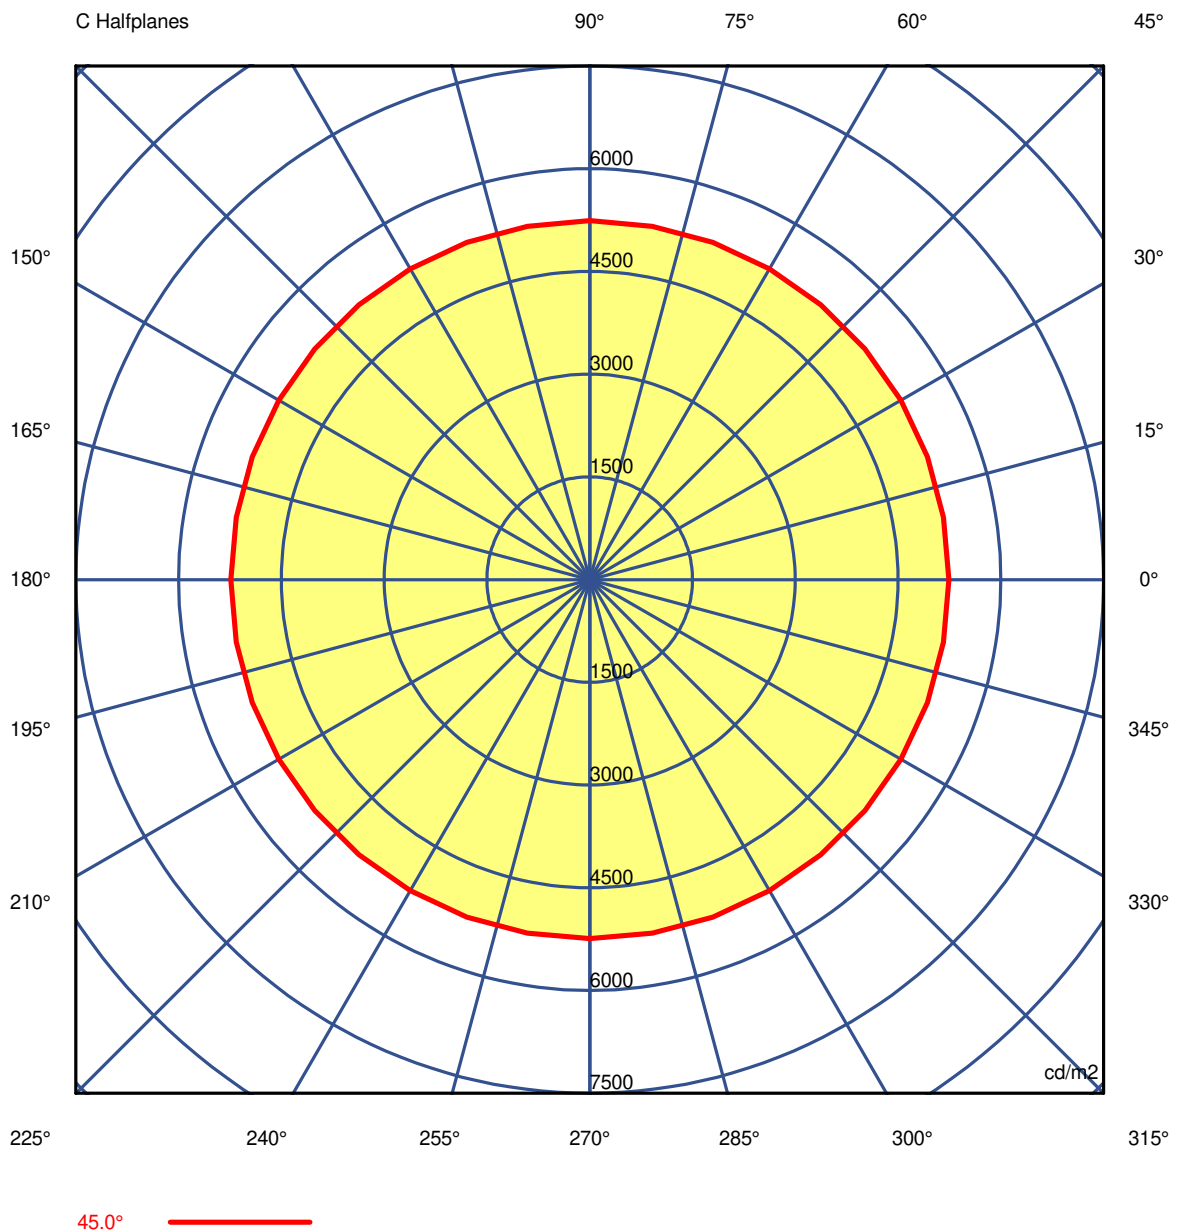

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measur.

Code PX-0529-NEG
Name MAGNET

Luminaire Flux		133.86 lm		Luminaire Power		1.50 W		Efficacy		89.24 lm/W		Efficiency		100.00%	
Sources Flux		133.86 lm		Maximum value		339.62 cd/klm		Position		C=0.00 G=1.00		CG		Rotosymmetrical	
Luminance cd/m2														Table 1/3	
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00		
G 0.0	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90		
G 5.0	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65		
G 10.0	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26		
G 15.0	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04		
G 20.0	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81		
G 25.0	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80		
G 30.0	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51		
G 35.0	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93		
G 40.0	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12		
G 45.0	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14		
G 50.0	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01		
G 55.0	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63		
G 60.0	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39		
G 65.0	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39		
G 70.0	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57		
G 75.0	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07		
G 80.0	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16		
G 85.0	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57		
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

**Luminaire**

Code PX-0529-NEG
Name MAGNET

Measur.

Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm		Luminaire Power		1.50 W		Efficacy		89.24 lm/W		Efficiency		100.00%	
Sources Flux	133.86 lm		Maximum value		339.62 cd/klm		Position		C=0.00 G=1.00		CG		Rotosymmetrical	
Luminance cd/m2														
Table 2/3														
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00	
G 0.0	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	
G 5.0	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	
G 10.0	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	
G 15.0	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	
G 20.0	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	
G 25.0	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	
G 30.0	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	
G 35.0	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	
G 40.0	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	
G 45.0	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	
G 50.0	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	
G 55.0	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	
G 60.0	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	
G 65.0	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	
G 70.0	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	
G 75.0	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	
G 80.0	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	
G 85.0	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

**Luminaire**

Code PX-0529-NEG
Name MAGNET


Measurem.

Code PX-0529-NEG
Name MAGNET

Luminaire Flux	133.86 lm	Luminaire Power	1.50 W	Efficacy	89.24 lm/W	Efficiency	100.00%
Sources Flux	133.86 lm	Maximum value	339.62 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminance cd/m2 Table 3/3

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90	5452.90
G 5.0	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65	5449.65
G 10.0	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26	5442.26
G 15.0	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04	5431.04
G 20.0	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81	5413.81
G 25.0	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80	5390.80
G 30.0	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51	5360.51
G 35.0	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93	5325.93
G 40.0	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12	5287.12
G 45.0	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14	5242.14
G 50.0	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01	5185.01
G 55.0	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63	5110.63
G 60.0	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39	5015.39
G 65.0	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39	4878.39
G 70.0	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57	4673.57
G 75.0	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07	4377.07
G 80.0	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16	3960.16
G 85.0	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57	3610.57
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Magnet

PX-0529

FOR
LIGHT

