




UNI EN 29001  
ISO 9001

Member of



The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.  
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

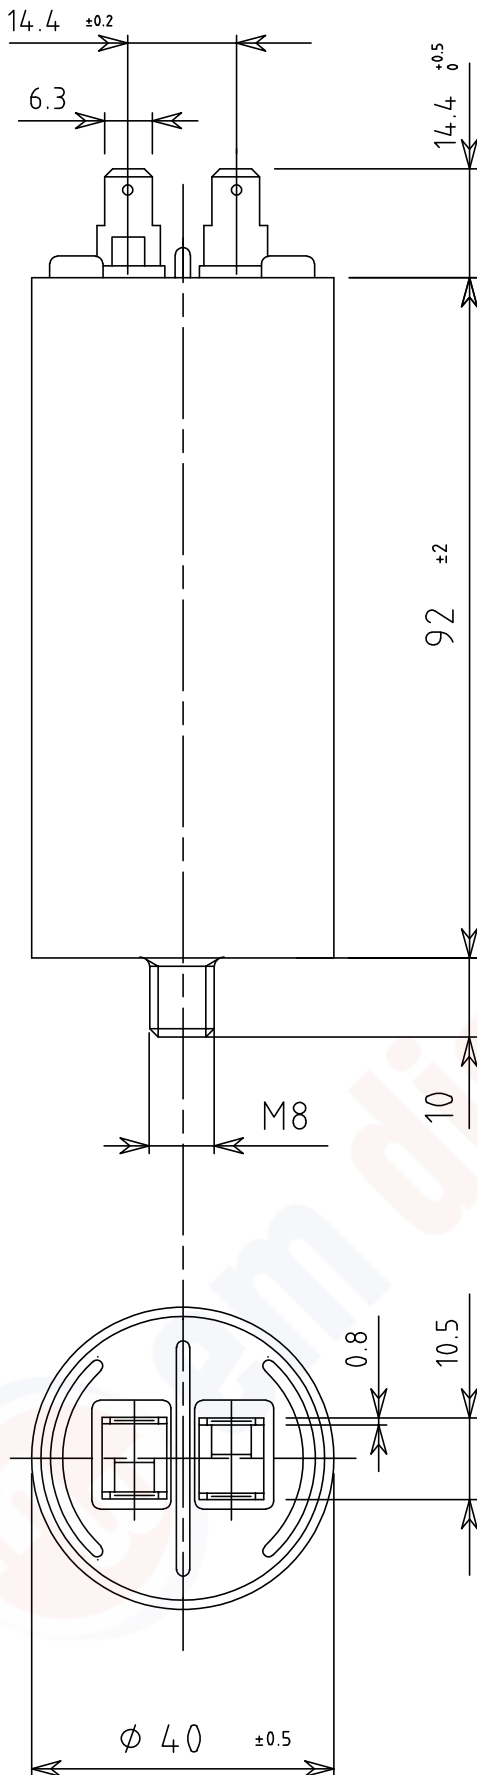

Characteristics:

Self healing metallized polypropylene film,  
dry sealed with polyurethane resin.  
Case and sealing cover in self-extinguishing  
plastic material (V2 class according UL-94 test).

Cover material properties:

Ball pressure test (IEC 60695-10-2): 125°C  
Glow wire test (IEC 60695-2-11): 850°C  
Tracking resistance (IEC 60112): >= 250V

DUCATI code: 416107064

Capacitance / Tolerance: 30µF ±5%

Test voltage (routine test):

Between terminals: 950Vac 2sec

Climatic category: -25/85/21

Protection degree: IP 00

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking

**DUCATI**  
energia  
416.10.70..  
30 µF ±5%  
425V ~ 10000h/cl.B  
475V ~ 3000h/cl.C  
-25/85/21 S0  
50-60 Hz

EN 60252-1/A1

A Updated drawing.		05/05/2015		Mollica			
Ed. Descrizione/Description Data/Date Firma/Sign.							
MODIFICHE/REVISIONS							
<b>DUCATI</b> energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED
					14/06/2007	Mollica	
OGGETTO/PART NAME						CODICE/PART NR.	
Dimensions for metallized polypropylene film capacitor for A.C. use.						416107064	
EDIZ./EDIT.						A	