



615 Raccord droit mâle



MESURE	CODE	EMBALLAGE
12x3/8"	615B038012	24/336
12x1/2"	615B012012	18/252
14x3/8"	615B038014	18/252
14x1/2"	615B012014	18/252
15x1/2"	615B012015	18/252
16x1/2"	615B012016	15/210
18x1/2"	615B012018	15/180
18x3/4"	615B034018	15/180
20x1/2"	615B012020	14/168
22x3/4"	615B034022	12/144
25x3/4"	615B034025	11/99
28x1"	615B100028	8/96

CERTIFICATION



CARACTÉRISTIQUES

Corps en laiton anti-dézinification (DZR).

Températures minimum et maximum de fonctionnement: -20 °C, 120 °C (pointes de 150 °C admises).


Pression nominale:

Tube de cuivre: 20 bar à 25 °C, 10 bar à 90 °C.

Tube en PER et polybutylène: 12 bar à 25 °C, 5 bar à 90 °C.

Raccords filetés: ISO 7/1 (équivalent à DIN EN 10226-1 et BS EN 10226-1).

DIMENSIONS

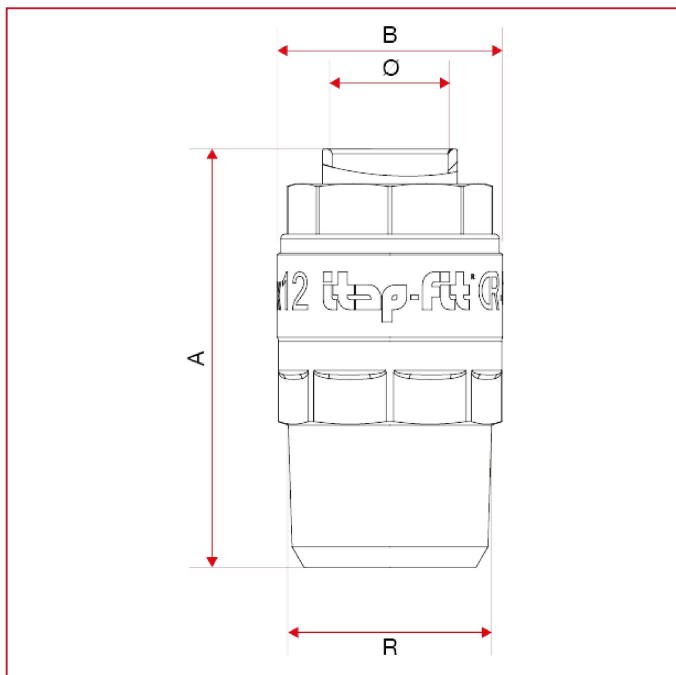




RACCORDS ITAP-FIT®

	12x3/8"	12x1/2"	14x3/8"	14x1/2"	15x1/2"	16x1/2"	18x1/2"	18x3/4"	20x1/2"	22x3/4"	25x3/4"	28x1"
A	40,7	44	44,6	45,5	45	45,5	55,6	49,3	59,4	60,4	63	66
B	23	23,7	25	25	26	27	31,5	31,5	34	36	40	43,7

MATÉRIAUX

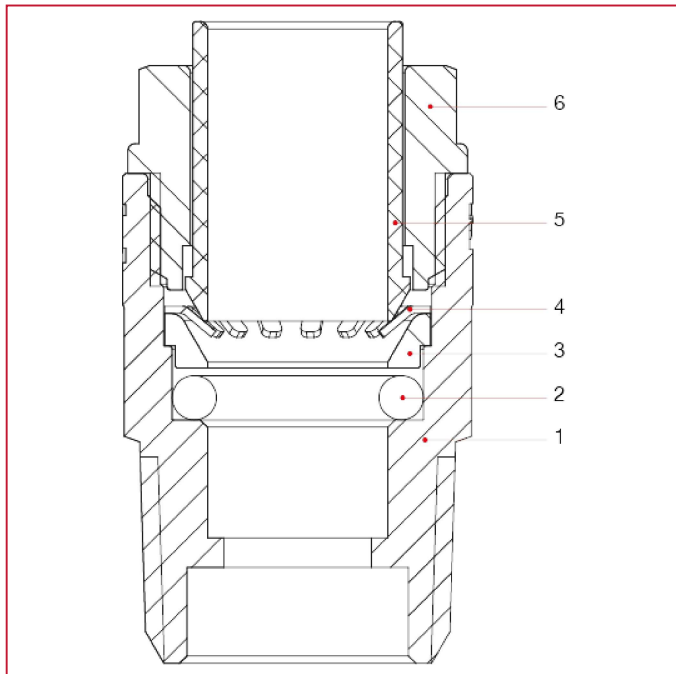

POS.	DESCRIPTION	Q.té	MATÉRIAU
1	Corps	1	Laiton CW625N
2	Joint torique	1	EPDM
3	Entretoise	1	NIRETAN A EXL SC
4	Bague de sécurité	1	Acier inox AISI 301
5	Douille de décrochage	1	GRIVORY GV-5H
6	Manchon	1	GRIVORY GV-5H