


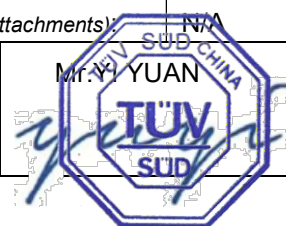


Report No.: 70.402.22.168.04-07

<b>TEST REPORT</b> <b>PPP 11118C:2021 Rev. 02</b> <b>TÜV SÜD Test Report for ErP verification of</b> <b>Ecodesign and Energy labelling requirement for LightSource</b> <b>Implementation measure (EU) 2019/2020 and (EU) 2019/2015</b>			
Report No.:	70.402.22.168.04-07		
Date of issue:	2022-09-19		
Project handler:	Mr.YI YUAN		
Testing laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch		
Address:	No. 151 Hengtong Road, 200070, Shanghai, P.R.China		
Testing location:	No. 1999, Duhui Road, Shanghai, 201108, P. R. China		
Client:	Ningbo Messi Lighting Electric Co.,LTD.		
Client number:	106385		
Address:	315613 Ninghai,Zhejiang Province PEOPLE'S REPUBLIC OF CHINA		
Contact person:	Angelia ZHANG		
Standard:	This TÜV SÜD test report form is based on the following requirements: (EU) 2019/2020:2019-10-01 with Corrigendum; (EU) 2019/2015:2019-03-11; (EU) 2021/341:2021-02-23; (EU) 2021/340:2020-12-17		
TRF number and revision:	PPP 11118C:2021 Rev.02:2021-10		
TRF originated by:	TÜV SÜD Product Service, Mr. Richard Xu.		
Copyright blank test report:	This test report is based on the content of the standard (see above). The test report considered selected clauses of the a.m. standard(s) and experience gained with product testing. It was prepared by TÜV SÜD Product Service.  TÜV SÜD Group takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.		
General disclaimer:	This test report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.		
Scheme:	<input type="checkbox"/> TÜV Mark <input type="checkbox"/> without certification <input type="checkbox"/> EU-Directive		
Non-standard test method:	<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes, see details under <i>Summary of testing</i>		
National deviations:	N/A		
Number of pages (Report):	27		
Number of pages (Attachments):	N/A		
Compiled by:	Mr.YI YUAN	Approved by:	Tranchen ZHANG
(+ signature)		(+ signature)	

Test Report PPP 11118C:2021 Rev.02

Report No.: 70.402.22.168.04-07

Test sample:	10 pre-production samples from the factory
Type of test object:	Work light
Trademark:	N/A
Model and/or type reference:	MX-G1005AC
Rating(s):	Containing product: 100V~240V AC, 50/60Hz, 0. 8A,76W Max. Light source: DC31.6V 76W
Manufacturer:	Ningbo Messi Lighting Electric Co.,LTD.
Manufacturer number:	106385
Address:	315613 Ninghai,Zhejiang Province PEOPLE'S REPUBLIC OF CHINA
<b>Name and address of factory(ies)</b> Ningbo Messi Lighting Electric Co.,Ltd. 315613 Ninghai,Zhejiang Province PEOPLE'S REPUBLIC OF CHINA	
Order description:	<input checked="" type="checkbox"/> Complete test according to TRF
	<input type="checkbox"/> Partial test according to manufacturer's specifications
	<input type="checkbox"/> Preliminary test
	<input type="checkbox"/> Spot check
	<input type="checkbox"/> Others:
Date of order:	2022-07-15
Date of receipt of test item:	2022-03-06
Date(s) of performance of test:	2022-03-10to 2022-09-15
<b>Test item particulars:</b>	
Light source type:	
- Containing product is a light source	<input type="checkbox"/> - see Annex X for manufacturer justification
- LED (Light Emitting Diode)	<input checked="" type="checkbox"/>
- OLED (Organic Light Emitting Diode)	<input type="checkbox"/>
- Incandescent Lamp	<input type="checkbox"/>
- CFL (Compact Fluorescent Lamp)	<input type="checkbox"/>
- CFLni (Compact Fluorescent Lamp without integrated ballast)	<input type="checkbox"/>
- HL (Halogen Lamp)	<input type="checkbox"/>
- FL (Fluorescent Lamp, including circular, U-shape, etc.)	<input type="checkbox"/>
- LFL (Linear Fluorescent Lamp)	<input type="checkbox"/>

Report No.: 70.402.22.168.04-07

- Magnetic induction light source	<input type="checkbox"/>
- HID (High-intensity Discharge lamp, including metal halide, high-pressure sodium and mercury vapour type)	<input type="checkbox"/>
<hr style="border-top: 1px dashed #000;"/>	
<b>Use of light source:</b>	
- Indoor	<input checked="" type="checkbox"/>
- Outdoor	<input checked="" type="checkbox"/>
- Industry	<input type="checkbox"/>
<hr style="border-top: 1px dashed #000;"/>	
<b>Envelope:</b>	
- No	<input checked="" type="checkbox"/>
- Second envelope	<input type="checkbox"/>
- Non-clear envelope	<input type="checkbox"/>
<hr style="border-top: 1px dashed #000;"/>	
<b>Light source characteristic:</b>	
- NDLS (non-directional light source)	<input checked="" type="checkbox"/>
- DLS (directional light source)	<input type="checkbox"/>
- MLS (mains light source)	<input type="checkbox"/>
- NMLS (non-mains light source)	<input checked="" type="checkbox"/>
- CTLS (colour-tuneable light source)	<input type="checkbox"/>
- CLS (connected light source)	<input type="checkbox"/> , Type: Bluetooth , Wifi,...
- Dimmable	<input type="checkbox"/>
- Programmable	<input type="checkbox"/>
- With standby mode	<input type="checkbox"/>
- With networked standby mode	<input type="checkbox"/>
- With anti-glare shield	<input type="checkbox"/>
<hr style="border-top: 1px dashed #000;"/>	
<b>Useful luminous flux (<math>\Phi_{use}</math>) type:</b>	
- Narrow cone (90° )	<input type="checkbox"/>
- Wide cone (120° )	<input type="checkbox"/>
- Sphere (360° )	<input checked="" type="checkbox"/>
<hr style="border-top: 1px dashed #000;"/>	
Lamp cap installed:	N/A
<hr style="border-top: 1px solid #000;"/>	
<b>Purpose of the product</b> (description of intended use):	
Work light for general lighting applications	
<hr style="border-top: 1px solid #000;"/>	
<b>Characteristic data</b> (not shown on the marking plate):	
Declared technical data:	
Rated voltage .....	(V): DC 31.6

Report No.: 70.402.22.168.04-07

Rated current .....	(A):	2.4
Rated power.....	(W):	76
Rated useful luminous flux.....	(lm):	11500
Rated beam angle .....	(°):	N/A
Rated CCT .....	(K):	4000
Rated life time .....	(h):	25000
Dimensions:		Φ36X1105mm
Weight:		565g

**Attachments:**

1. Photometric test record of one lamp at initial measurement
2. Light intensity distribution record of one lamp at initial measurement
3. Test equipment list
4. Test method standard list
5. Manufacturers technical justification for containing product being a lightsource
6. ....


**If additional information is necessary, please provide**

For example: Instruction for how to remove the light source



Report No.: 70.402.22.168.04-07

**Copy of marking plate:**  
Not Provided

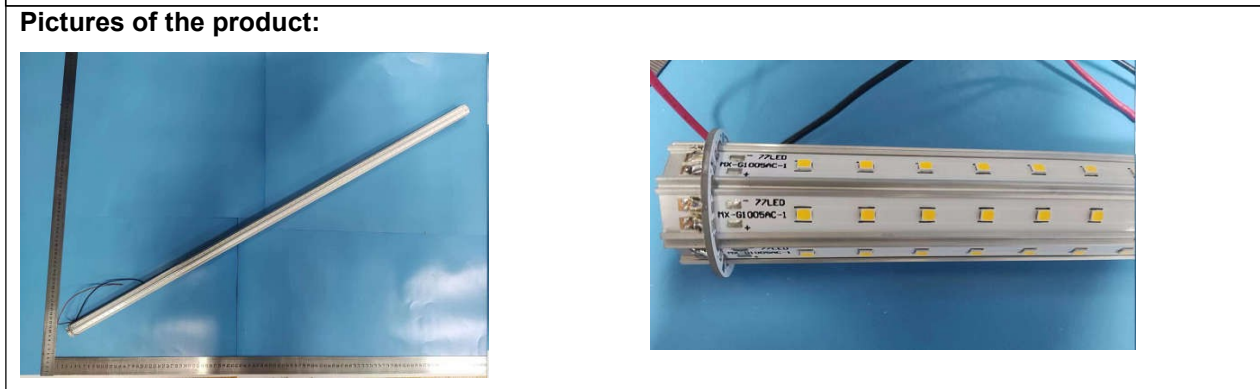

**Summary of testing:**

For Ecodesign requirement:  
The product meets the energy efficiency, functional & information requirement as specified in following details.

.....  
For Energy labelling requirement:

Requirement	Rated	Measured
$\eta_{TM}$	149	147
EE class	D	D
$E_c$ (kWh/1000h)	76	76

Energy efficiency class	Total mains efficacy $\eta_{TM}$ (lm/W)
A (most efficient)	$210 \leq \eta_{TM}$
B	$185 \leq \eta_{TM} < 210$
C	$160 \leq \eta_{TM} < 185$
D	$135 \leq \eta_{TM} < 160$
E	$110 \leq \eta_{TM} < 135$
F	$85 \leq \eta_{TM} < 110$
G (least efficient)	$\eta_{TM} < 85$

- Remark:
- The light source (LED module) was extracted from the product for the test.
- deviation(s) found  
 no deviations found

**Additional information on non-standard test method(s)**

Sub clause: N/A  
Page: N/A  
Rational: N/A



Report No.: 70.402.22.168.04-07

**Possible test case verdicts:**

test case does not apply to the test object: N/A (not applicable / not included in the order)

test object does meet the requirement: P (Pass)

test object does not meet the requirement: F (Fail)

*General remarks:*

*"(see remark #)" refers to a remark appended to the report.*

*"(see appended table)" refers to a table appended to the report.*

*Throughout this report a **comma/point** is used as the decimal separator.*

*The test results presented in this report relate only to the object tested.*

*This report shall not be reproduced except in full without the written approval of the testing laboratory.*

Clause	Requirement + Test	Result – Remark	Verdict
(EU) 2019/2020 - Ecodesign requirement:			
<b>0</b>	Measurement methods		P
	Recognised state of art measurement methods incl. the one published in the Official Journal taking into account the measurement methods of (EU) 2019/2020	See attachment 3	P
1.	Sample		P
	Number of sample used for test .....		P
2.	Energy efficiency requirements (Annex II, clause 1 of EU 2019/2020)		P
2.1	Maximum allowed power $P_{onmax}$ of light source (Annex II, clause 1, (a) of EU 2019/2020)		P
	From 1 September 2021, the declared power consumption of a light source $P_{on}$ shall not exceed the maximum allowed power $P_{onmax}$ (in W), defined as a function of the declared useful luminous flux $\Phi_{use}$ (in lm) and the declared colour rendering index CRI (-) as follows	$P_{on}:76$ $P_{on} \leq P_{onmax}$	P
	$P_{onmax} = C \times (L + \Phi_{use}/(F \times \eta)) \times R$	$P_{onmax}:97.33$	P
	where:		
	-The values for threshold efficacy ( $\eta$ in lm/W) and end loss factor (L in W) are specified in Table 1 of EU 2019/2020, depending on the lightsource type. They are constants used for computations and do not reflect true parameters of light sources. The threshold efficacy is not the minimum required efficacy; the latter can be computed by dividing the useful luminous flux by the computed maximum allowed power	$\eta :120$ $L:1.5$	P

Clause	Requirement + Test	Result – Remark	Verdict																																																																	
	<p style="text-align: center;">Table 1 of EU 2019/2020 Threshold efficacy (<math>\eta</math>) and end loss factor (L)</p> <table border="1" data-bbox="331 454 1294 1536"> <thead> <tr> <th data-bbox="339 454 995 501" rowspan="2">Light source description</th> <th data-bbox="1003 454 1139 501"><math>\eta</math></th> <th data-bbox="1147 454 1286 501">L</th> </tr> <tr> <th data-bbox="1003 512 1139 548">[lm/W]</th> <th data-bbox="1147 512 1286 548">[W]</th> </tr> </thead> <tbody> <tr> <td data-bbox="339 560 995 595">LFL T5-HE</td> <td data-bbox="1003 560 1139 595">98,8</td> <td data-bbox="1147 560 1286 595">1,9</td> </tr> <tr> <td data-bbox="339 607 995 642">LFL T5-HO, <math>4\ 000 \leq \Phi \leq 5\ 000</math> lm</td> <td data-bbox="1003 607 1139 642">83,0</td> <td data-bbox="1147 607 1286 642">1,9</td> </tr> <tr> <td data-bbox="339 654 995 689">LFL T5-HO, other lm output</td> <td data-bbox="1003 654 1139 689">79,0</td> <td data-bbox="1147 654 1286 689">1,9</td> </tr> <tr> <td data-bbox="339 701 995 736">FL T5 circular</td> <td data-bbox="1003 701 1139 736">79,0</td> <td data-bbox="1147 701 1286 736">1,9</td> </tr> <tr> <td data-bbox="339 748 995 784">FL T8 (including FL T8 U-shaped)</td> <td data-bbox="1003 748 1139 784">89,7</td> <td data-bbox="1147 748 1286 784">4,5</td> </tr> <tr> <td data-bbox="339 795 995 831">From 1 September 2023, for FL T8 of 2-, 4- and 5-foot</td> <td data-bbox="1003 795 1139 831">120,0</td> <td data-bbox="1147 795 1286 831">1,5</td> </tr> <tr> <td data-bbox="339 842 995 878">Magnetic induction light source, any length/flux</td> <td data-bbox="1003 842 1139 878">70,2</td> <td data-bbox="1147 842 1286 878">2,3</td> </tr> <tr> <td data-bbox="339 889 995 925">CFLni</td> <td data-bbox="1003 889 1139 925">70,2</td> <td data-bbox="1147 889 1286 925">2,3</td> </tr> <tr> <td data-bbox="339 936 995 972">FL T9 circular</td> <td data-bbox="1003 936 1139 972">71,5</td> <td data-bbox="1147 936 1286 972">6,2</td> </tr> <tr> <td data-bbox="339 983 995 1019">HPS single-ended</td> <td data-bbox="1003 983 1139 1019">88,0</td> <td data-bbox="1147 983 1286 1019">50,0</td> </tr> <tr> <td data-bbox="339 1030 995 1066">HPS double-ended</td> <td data-bbox="1003 1030 1139 1066">78,0</td> <td data-bbox="1147 1030 1286 1066">47,7</td> </tr> <tr> <td data-bbox="339 1077 995 1113">MH <math>\leq 405</math> W single-ended</td> <td data-bbox="1003 1077 1139 1113">84,5</td> <td data-bbox="1147 1077 1286 1113">7,7</td> </tr> <tr> <td data-bbox="339 1124 995 1160">MH <math>&gt; 405</math> W single-ended</td> <td data-bbox="1003 1124 1139 1160">79,3</td> <td data-bbox="1147 1124 1286 1160">12,3</td> </tr> <tr> <td data-bbox="339 1171 995 1207">MH ceramic double-ended</td> <td data-bbox="1003 1171 1139 1207">84,5</td> <td data-bbox="1147 1171 1286 1207">7,7</td> </tr> <tr> <td data-bbox="339 1218 995 1254">MH quartz double-ended</td> <td data-bbox="1003 1218 1139 1254">79,3</td> <td data-bbox="1147 1218 1286 1254">12,3</td> </tr> <tr> <td data-bbox="339 1265 995 1301">Organic light-emitting diode (OLED)</td> <td data-bbox="1003 1265 1139 1301">65,0</td> <td data-bbox="1147 1265 1286 1301">1,5</td> </tr> <tr> <td data-bbox="339 1312 995 1348">Until 1 September 2023: HL G9, G4 and GY6.35</td> <td data-bbox="1003 1312 1139 1348">19,5</td> <td data-bbox="1147 1312 1286 1348">7,7</td> </tr> <tr> <td data-bbox="339 1359 995 1395">HL R7s <math>\leq 2\ 700</math> lm</td> <td data-bbox="1003 1359 1139 1395">26,0</td> <td data-bbox="1147 1359 1286 1395">13,0</td> </tr> <tr> <td data-bbox="339 1406 995 1442">Other light sources in scope not mentioned above</td> <td data-bbox="1003 1406 1139 1442">120,0</td> <td data-bbox="1147 1406 1286 1442">1,5 (*)</td> </tr> <tr> <td data-bbox="339 1453 995 1489"></td> <td colspan="2" data-bbox="339 1453 1286 1489">(*) For connected light sources (CLS) a factor L = 2,0 shall be applied.</td> </tr> </tbody> </table>	Light source description	$\eta$	L	[lm/W]	[W]	LFL T5-HE	98,8	1,9	LFL T5-HO, $4\ 000 \leq \Phi \leq 5\ 000$ lm	83,0	1,9	LFL T5-HO, other lm output	79,0	1,9	FL T5 circular	79,0	1,9	FL T8 (including FL T8 U-shaped)	89,7	4,5	From 1 September 2023, for FL T8 of 2-, 4- and 5-foot	120,0	1,5	Magnetic induction light source, any length/flux	70,2	2,3	CFLni	70,2	2,3	FL T9 circular	71,5	6,2	HPS single-ended	88,0	50,0	HPS double-ended	78,0	47,7	MH $\leq 405$ W single-ended	84,5	7,7	MH $> 405$ W single-ended	79,3	12,3	MH ceramic double-ended	84,5	7,7	MH quartz double-ended	79,3	12,3	Organic light-emitting diode (OLED)	65,0	1,5	Until 1 September 2023: HL G9, G4 and GY6.35	19,5	7,7	HL R7s $\leq 2\ 700$ lm	26,0	13,0	Other light sources in scope not mentioned above	120,0	1,5 (*)		(*) For connected light sources (CLS) a factor L = 2,0 shall be applied.			
Light source description	$\eta$		L																																																																	
	[lm/W]	[W]																																																																		
LFL T5-HE	98,8	1,9																																																																		
LFL T5-HO, $4\ 000 \leq \Phi \leq 5\ 000$ lm	83,0	1,9																																																																		
LFL T5-HO, other lm output	79,0	1,9																																																																		
FL T5 circular	79,0	1,9																																																																		
FL T8 (including FL T8 U-shaped)	89,7	4,5																																																																		
From 1 September 2023, for FL T8 of 2-, 4- and 5-foot	120,0	1,5																																																																		
Magnetic induction light source, any length/flux	70,2	2,3																																																																		
CFLni	70,2	2,3																																																																		
FL T9 circular	71,5	6,2																																																																		
HPS single-ended	88,0	50,0																																																																		
HPS double-ended	78,0	47,7																																																																		
MH $\leq 405$ W single-ended	84,5	7,7																																																																		
MH $> 405$ W single-ended	79,3	12,3																																																																		
MH ceramic double-ended	84,5	7,7																																																																		
MH quartz double-ended	79,3	12,3																																																																		
Organic light-emitting diode (OLED)	65,0	1,5																																																																		
Until 1 September 2023: HL G9, G4 and GY6.35	19,5	7,7																																																																		
HL R7s $\leq 2\ 700$ lm	26,0	13,0																																																																		
Other light sources in scope not mentioned above	120,0	1,5 (*)																																																																		
	(*) For connected light sources (CLS) a factor L = 2,0 shall be applied.																																																																			
	-Basic values for correction factor (C) depending on light source type, and additions to C for special light source features are specified in Table 2 of EU 2019/2020	C:1.00	P																																																																	

Clause	Requirement + Test	Result – Remark	Verdict																										
	Table 2 of EU 2019/2020 Correction factor C depending on light source characteristics		-																										
	<table border="1" style="width: 100%;"> <thead> <tr> <th style="width: 50%;">Light source type</th> <th style="width: 50%;">Basic C value</th> </tr> </thead> <tbody> <tr> <td>Non-directional (NDLS) not operating on mains (NMLS)</td> <td style="text-align: center;">1,00</td> </tr> <tr> <td>Non-directional (NDLS) operating on mains (MLS)</td> <td style="text-align: center;">1,08</td> </tr> <tr> <td>Directional (DLS) not operating on mains (NMLS)</td> <td style="text-align: center;">1,15</td> </tr> <tr> <td>Directional (DLS) operating on mains (MLS)</td> <td style="text-align: center;">1,23</td> </tr> <tr> <th style="text-align: center;">Special light source feature</th> <th style="text-align: center;">Bonus on C</th> </tr> <tr> <td>FL or HID with CCT &gt; 5 000 K</td> <td style="text-align: center;">+0,10</td> </tr> <tr> <td>FL with CRI &gt; 90</td> <td style="text-align: center;">+0,10</td> </tr> <tr> <td>HID with second envelope</td> <td style="text-align: center;">+0,10</td> </tr> <tr> <td>MH NDLS &gt; 405 W with non-clear envelope</td> <td style="text-align: center;">+0,10</td> </tr> <tr> <td>DLS with anti-glare shield</td> <td style="text-align: center;">+0,20</td> </tr> <tr> <td>Colour-tuneable light source (CTLS)</td> <td style="text-align: center;">+0,10</td> </tr> <tr> <td>High luminance light sources (HLLS)</td> <td style="text-align: center;">+0,0058 • Luminance-HLLS - 0,0167</td> </tr> </tbody> </table>	Light source type	Basic C value	Non-directional (NDLS) not operating on mains (NMLS)	1,00	Non-directional (NDLS) operating on mains (MLS)	1,08	Directional (DLS) not operating on mains (NMLS)	1,15	Directional (DLS) operating on mains (MLS)	1,23	Special light source feature	Bonus on C	FL or HID with CCT > 5 000 K	+0,10	FL with CRI > 90	+0,10	HID with second envelope	+0,10	MH NDLS > 405 W with non-clear envelope	+0,10	DLS with anti-glare shield	+0,20	Colour-tuneable light source (CTLS)	+0,10	High luminance light sources (HLLS)	+0,0058 • Luminance-HLLS - 0,0167		
Light source type	Basic C value																												
Non-directional (NDLS) not operating on mains (NMLS)	1,00																												
Non-directional (NDLS) operating on mains (MLS)	1,08																												
Directional (DLS) not operating on mains (NMLS)	1,15																												
Directional (DLS) operating on mains (MLS)	1,23																												
Special light source feature	Bonus on C																												
FL or HID with CCT > 5 000 K	+0,10																												
FL with CRI > 90	+0,10																												
HID with second envelope	+0,10																												
MH NDLS > 405 W with non-clear envelope	+0,10																												
DLS with anti-glare shield	+0,20																												
Colour-tuneable light source (CTLS)	+0,10																												
High luminance light sources (HLLS)	+0,0058 • Luminance-HLLS - 0,0167																												
	Where applicable, bonuses on correction factor C are cumulative		N/A																										
	The bonus for HLLS shall not be combined with the basic C-value for DLS (basic C-value for NDLS shall be used for HLLS)		N/A																										
	-Efficacy factor (F) is:		P																										
	1,00 for non-directional light sources (NDLS, using total flux)	F:1.00	P																										
	0,85 for directional light sources (DLS, using flux in a cone)	F:	N/A																										
	-CRI factor (R) is:		P																										
	0,65 for CRI ≤ 25	R:	N/A																										
	(CRI+80)/160 for CRI > 25, rounded to two decimals	R: 1.00 (CRI=80)	P																										
	Light sources that allow the end-user to adapt the spectrum and/or the beam angle of the emitted light, thus changing the values for useful luminous flux, colour rendering index (CRI) and/or		N/A																										

Clause	Requirement + Test	Result – Remark	Verdict
	correlated colour temperature (CCT), and/or changing the directional/non-directional status of the light source, shall be evaluated using the reference control settings.		
	Standby power $P_{sb}$ and networked standby power $P_{net}$ of light source		N/A
	The standby power $P_{sb}$ of a light source shall not exceed 0,5 W	$P_{sb}$ :	N/A
	The networked standby power $P_{net}$ of a connected light source shall not exceed 0,5 W	$P_{net}$ :	N/A
	The allowable values for $P_{sb}$ and $P_{net}$ shall not be added together		N/A
	CLS and CSCG designed and marketed specifically for scene-lighting use in film-studios, TV-studios and locations, and photographic studios and locations, or for stage-lighting use in theatres, discos and during concerts or other entertainment events, for connection to high speed control networks (utilising signalling rates of 250 000 bits per second and higher) in always-listening mode, shall be exempt from the requirements on standby ( $P_{sb}$ ) and on networked standby ( $P_{net}$ ) of points 1(a) and 1(b) of Annex II		N/A
3	Functional requirements (Annex II, clause 2 of EU 2019/2020)		P
	From 1 September 2021, the functional requirements should apply for <b>light sources</b> (Annex II, clause 2, table 4 of EU 2019/2020)		
3.1	Colour rendering		P
	$CRI \geq 80$	CRI:	P
	except for HID with $\Phi_{use} > 4 \text{ klm}$ and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a $CRI < 80$ , when a clear indication to this effect is shown on the light source packaging and in all relevant printed and electronic documentation	CRI:	N/A
3.2	Displacement factor (DF, $\cos \varphi_1$ ) at power input $P_{on}$ for LED and OLED MLS		N/A
	No limit at $P_{on} \leq 5 \text{ W}$	$P_{on}$ :	N/A
	$DF \geq 0,5$ at $5 \text{ W} < P_{on} \leq 10 \text{ W}$	$P_{on}$ : DF:	N/A
	$DF \geq 0,7$ at $10 \text{ W} < P_{on} \leq 25 \text{ W}$	$P_{on}$ : DF:	N/A
	$DF \geq 0,9$ at $25 \text{ W} < P_{on}$	$P_{on}$ :	N/A

Clause	Requirement + Test	Result – Remark	Verdict
		DF:	
3.3	Lumen maintenance factor (for LED and OLED)		P
	The lumen maintenance factor $X_{LMF}\%$ after endurance testing shall be at least $X_{LMF,MIN}\%$ calculated as follows		P
	$X_{LMF,MIN}\% = 100 \times e^{\frac{(3000 \times \ln(0.7))}{L_{70}}}$ where $L_{70}$ is the declared $L_{70B50}$ lifetime (in hours)	$L_{70}$ :25000 $X_{LMF,MIN}\%$ : $X_{LMF}\%$ :95.8%	P
	If the calculated value for $X_{LMF,MIN}$ exceeds 96,0 %, an $X_{LMF,MIN}$ value of 96,0 % shall be used	$X_{LMF,MIN}\%$ =96,0%	N/A
3.4	Survival factor (SF) (for LED and OLED)		
	At least 9 light sources of the 10 test samples must be operational after completing the endurance testing		P
3.5	Colour consistency for LED and OLED light sources		P
	Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.	see attached table 1	P
3.6	Flicker for LED and OLED MLS		N/A
	$P_{stLM} \leq 1,0$ at full-load		N/A
3.7	Stroboscopic effect for LED and OLED MLS		
	$SVM \leq 0,9$ at full-load		N/A
	From 1 September 2024: $SVM \leq 0,4$ at full-load		N/A
	except for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI < 80		N/A
4	Information requirements (Annex II, clause 3 of EU 2019/2020)		P
	From 1 September 2021 the following information requirements shall apply:		P
4.1	Information to be displayed on the light source itself		P
	For all light sources, except CTLS, LFL, CFLni, other FL, and HID, the value and physical unit of the useful luminous flux (lm) and correlated colour temperature (K) shall be displayed in a legible font on the surface if, after the inclusion of safety-related information, there is sufficient space available for it without unduly obstructing the light emission		P
	For directional light sources, the beam angle (°) shall also be indicated		N/A
	If there is room for only two values, the useful luminous flux and the correlated colour temperature shall be displayed		N/A
	If there is room for only one value, the useful luminous flux shall be displayed		N/A

Clause	Requirement + Test	Result – Remark	Verdict
4.2	Information to be visibly displayed on the packaging		P
4.2.1	Light source placed on the market, not in a containing product		N/A
	If a light source is placed on the market, not in a containing product, in a packaging containing information to be visibly displayed at a point-of-sale prior to its purchase, the following information shall be clearly and prominently displayed on the packaging:		N/A
(a)	the useful luminous flux ( $\Phi_{use}$ ) in a font at least twice as large as the display of the on-mode power ( $P_{on}$ ), clearly indicating if it refers to the flux in a sphere ( $360^\circ$ ), in a wide cone ( $120^\circ$ ) or in a narrow cone ( $90^\circ$ )		N/A
(b)	the correlated colour temperature, rounded to the nearest 100 K, also expressed graphically or in words, or the range of correlated colour temperatures that can be set		N/A
(c)	the beam angle in degrees (for directional light sources), or the range of beam angles that can be set		N/A
(d)	electrical interface details, e.g. cap- or connector-type, type of power supply (e.g. 230 V AC 50 Hz, 12 V DC)		N/A
(e)	the $L_{70B50}$ lifetime for LED and OLED light sources, expressed in hours		N/A
(f)	the on-mode power ( $P_{on}$ ), expressed in W		N/A
(g)	the standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		N/A
(h)	the networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		N/A
(i)	the colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set		N/A
(j)	if $CRI < 80$ , and the light source is intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a $CRI < 80$ , a clear indication to this effect. For HID light sources with useful luminous flux $> 4\,000$ lm, this indication is not mandatory		N/A
(k)	if the light source is designed for optimum use in non-standard conditions (such as ambient temperature $T_a \neq 25^\circ \text{C}$ or specific thermal management is necessary): information on those conditions		N/A
(l)	a warning if the light source cannot be dimmed or can be dimmed only with specific dimmers or with specific wired or wireless dimming methods. In the latter cases a list of compatible dimmers and/or methods shall be provided on the manufacturer's website		N/A

Clause	Requirement + Test	Result – Remark	Verdict
(m)	if the light source contains mercury: a warning of this, including the mercury content in mg rounded to the first decimal place		N/A
(n)	if the light source is within the scope of Directive 2012/19/EU, without prejudice to marking obligations pursuant to Article 14(4) of Directive 2012/19/EU, or contains mercury: a warning that it shall not be disposed of as unsorted municipal waste		N/A
	Items (a) to (d) shall be displayed on the packaging in the direction meant to face prospective buyer; for other items this is also recommended, if space permits		N/A
	For light sources that can be set to emit light with different characteristics, the information shall be reported for the <b>reference control settings</b> . In addition, a range of obtainable values may be indicated		N/A
	The information does not need to use the exact wording on the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols		N/A
5	Removal of light sources and separate control gears (Article 4 of EU 2019/2020)		P
5.1	Manufacturers, importers or authorised representatives of containing products shall ensure that light sources and separate control gears can be replaced with the use of common available tools and without permanent damage to the containing product, unless a technical justification related to the functionality of the containing product is provided in the technical documentation explaining why the replacement of light sources and separate control gear is not appropriate		P
	The technical documentation shall also provide instructions on how light sources and separate control gears can be removed without being permanently damaged for verification purposes by market surveillance authorities		P
5.2	Manufacturers, importers or authorized representatives of containing products shall provide information about the replaceability or non-replaceability of light sources and control gears by end-users or qualified persons without permanent damage to the containing product. Such information shall be available on a free-access website. For products sold directly to end-users, this information shall be on the packaging, at least in the form of a pictogram, and in the user instructions		P

Clause	Requirement + Test	Result – Remark	Verdict
5.3	Manufacturers, importers or authorised representatives of containing products shall ensure that light sources and separate control gears can be dismantled from containing products at end of life. Dismantling instructions shall be available on a free access website		P
6	Circumvention (Article 7 of EU 2019/2020)		P
	The manufacturer, importer or authorised representative shall not place on the market products designed to be able to detect they are being tested (e.g. by recognising the test conditions or test cycle), and to react specifically by automatically altering their performance during the test with the aim of reaching a more favourable level for any of the parameters declared by the manufacturer, importer or authorised representative in the technical documentation or included in any of the documentation provided.		P
	The energy consumption of the product and any of the other declared parameters shall not deteriorate after a software or firmware update when measured with the same test standard originally used for the declaration of conformity, except with explicit consent of the end-user prior to the update.		P
	A software update shall never have the effect of changing the product's performance in a way that makes it non-compliant with the ecodesign requirements applicable for the declaration of conformity.		P


Clause	Requirement + Test	Result – Remark	Verdict
(EU) 2019/2015 - Energy labelling requirement:			
6	Measurement methods		P
	Recognised state of art measurement methods incl. the one published in the Official Journal taking into account the measurement methods of EU 2019/2015		P
7	Method for calculating the total mains efficacy (Annex II, EU 2019/2015)		P
7.1	Calculation the total mains efficacy		P
	The energy efficiency class of light sources shall be determined as set out in Annex II, Table 1 of EU 2020/2015	See attached table 2	P
	on the basis of the total mains efficacy $\eta_{TM}$ , which is calculated by dividing the declared useful luminous flux $\Phi_{use}$ (expressed in lm) by the declared on mode power consumption $P_{on}$ (expressed in W) and multiplying by the applicable factor $F_{TM}$ of Annex II, Table 2 of EU 2019/2015 as follow:  $\eta_{TM} = (\Phi_{use}/P_{on}) \times F_{TM} (lm/W)$	See attached table 2	P
	declared useful luminous flux $\Phi_{use}$ (expressed in lm)	See attached table 2	P
	declared on mode power consumption $P_{on}$ (expressed in W)	See attached table 2	P
	applicable factor $F_{TM}$ of Annex II, Table 2 of EU 2019/2015		-
	Factors $F_{TM}$ by light source type (Table 2 of Annex II, EU 2019/2015)		-
	Light source type	Factor $F_{TM}$	-
	Non-directional (NDLS) operating on mains (MLS)	1,000	N/A
	Non-directional (NDLS) not operating on mains (NMLS)	0,926	P
	Directional (DLS) operating on mains (MLS)	1,176	N/A
	Directional (DLS) not operating on mains (NMLS)	1,089	N/A
7.2	CALCULATION OF THE ENERGY CONSUMPTION		P
	The weighted energy consumption ( $E_c$ ) is calculated in kWh/1000 h as follows and is rounded to two decimal places: $E_c = P_{on} \times 1000h/1000$	See attached table 2	P

Clause	Requirement + Test	Result – Remark	Verdict
8	Evaluation		P
	Declared values are not more favorable then value based on measured data	See attached table 2	P
9	Product information (Annex V of EU 2019/2015)		P
9.1	Product information sheet	Optional: Manufatcurer can declare based on a draft	P
9.1.1	Pursuant to point 1(b) of Article 3, the supplier shall enter into the product database the information as set out in Annex V, Table 3, including when the light source is a part in a containing product		P
	For light sources that can be tuned to emit light at full-load with different characteristics, the values of parameters that vary with these characteristics shall be reported at the reference control settings		N/A
	If the light source is no longer placed on the EU market, the supplier shall put in the product database the date(month, year) when the placing on the EU market stopped		N/A
9.2	Information to be displayed in the documentation for a containing product		P
	If a light source is placed on the market as a part in a containing product, the technical documentation for the containing product shall clearly identify the contained light source(s), including the energy efficiency class		P
	If a light source is placed on the market as a part in a containing product, the following textshall be displayed, clearly legible, in the user manual or booklet of instructions:		P
	'This product contains a light source of energy efficiency class <X>'		P
	where <X> shall be replaced by the energy efficiency class of the contained light source		P
	If the product contains more than one light source, the sentence can be in the plural, or repeated per light source, as suitable		N/A
9.3	Information to be displayed on the supplier' s free access website	Optional: Manufatcurer can declare based on a draft	P
(a)	The reference control settings, and instructions on how they can be implemented, where applicable		N/A
(b)	Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimize their power consumption		N/A
(c)	If the light source is dimmable: a list of dimmers it is compatible with, and the light source — dimmer compatibility standard(s) it is compliant with, if any		N/A
(d)	If the light source contains mercury: instructions on how to clean up the debris in case of accidental breakage		N/A

Clause	Requirement + Test	Result – Remark	Verdict
(e)	Recommendations on how to dispose of the light source at the end of its life in line with Directive 2012/19/EU of the European Parliament and of the Council		P
9.4	Information for products specified in point 3 of Annex IV		N/A
	For the light sources specified in point 3 of Annex IV, their intended use shall be stated on all forms of packaging, product information and advertisement, together with a clear indication that the light source is not intended for use in other applications		N/A
	The technical documentation file drawn up for the purposes of conformity assessment, in accordance with paragraph 3 of Article 3 of Regulation (EU) 2017/1369 shall list the technical parameters that make the product design specific to qualify for the exemption		N/A
10	Technical documentation (Annex VI of EU 2019/2015)		P
10.1	The technical documentation referred to in point 1(d) of Article 3 shall include:	Optional: Manufatcurer can declare his intention based on a draft	P
(a)	the name and address of the supplier		P
(b)	supplier' s model identifier		P
(c)	the model identifier of all equivalent models already placed on the market		P
(d)	identification and signature of the person empowered to bind the supplier		P
(e)	the declared values for the following technical parameters; these values are considered as the declared values for the purpose of the verification procedure in Annex IX		P
(1)	useful luminous flux ( $\Phi_{use}$ ) in lm	11500	P
(2)	colour rendering index (CRI)	80	P
(3)	on-mode power ( $P_{on}$ ) in W	76	P
(4)	beam angle in degrees for directional light sources (DLS)		N/A
(4a)	peak luminous intensity in cd for directional light sources (DLS)		N/A
(5)	correlated colour temperature (CCT) in K	4000	P
(6)	standby power ( $P_{sb}$ ) in W, including when it is zero		N/A
(7)	networked standby power ( $P_{net}$ ) in W for connected light sources (CLS)		N/A
(7a)	R9 colour rendering index value for LED and OLED light sources		P
(7b)	survival factor for LED and OLED light sources		P
(7c)	lumen maintenance factor for LED and OLED light sources		P
(7d)	indicative lifetime L70B50 for LED and OLED light sources		P

Clause	Requirement + Test	Result – Remark	Verdict
(8)	displacement factor ( $\cos \phi 1$ ) for LED and OLED mains light sources		N/A
(9)	colour consistency in MacAdam ellipse steps for LED and OLED light sources		P
(10)	luminance-HLLS in $\text{cd}/\text{mm}^2$ (only for HLLS)		N/A
(11)	flicker metric ( $P_{stLM}$ ) for LED and OLED light sources		N/A
(12)	stroboscopic effect metric (SVM) for LED and OLED light sources		N/A
(13)	excitation purity, only for CTLS, for the following colours and dominant wavelength within the given range		N/A
	Colour Dominant wave-length range		N/A
	Blue 440 nm — 490 nm		N/A
	Green 520 nm — 570 nm		N/A
	Red 610 nm — 670 nm		N/A
(f)	the calculations performed with the parameters, including the determination of the energy efficiency class		N/A
(g)	references to the harmonised standards applied or other standards used		P
(h)	testing conditions if not described sufficiently in point (g)		P
(i)	the reference control settings, and instructions on how they can be implemented, where applicable		N/A
(j)	instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimise their power consumption during light source testing		N/A
(k)	specific precautions that shall be taken when the model is assembled, installed, maintained or tested		P
10.2	The elements listed under point 1 shall also constitute the mandatory specific parts of the technical documentation that the supplier shall enter into the database, pursuant to point 5 of Article 12 of Regulation (EU) 2017/1369		P
11	Information to be provided in visual advertisements, in technical promotional material and in distance selling, except distance selling on the internet (Annex VII of EU 2019/2015)		N/A
11.1	In visual advertisements, for the purposes of ensuring conformity with the requirements laid down in point 1(e) of Article 3 and point 1(c) of Article 4, the energy class and the range of efficiency classes available on the label shall be shown as set out in point 4 of this Annex	Optional: Manufatcurer can declare based on a draft	N/A

Clause	Requirement + Test	Result – Remark	Verdict
11.2	In technical promotional material, for the purposes of ensuring conformity with the requirements laid down in point 1(f) of Article 3 and point 1(d) of Article 4, the energy class and the range of efficiency classes available on the label shall be shown as set out in point 4 of this Annex		N/A
11.3	Any paper-based distance selling must show the energy class and the range of efficiency classes available on the label as set out in point 4 of this Annex		N/A
11.4	The energy efficiency class and the range of energy efficiency classes shall be shown, as indicated in Figure 2, with		N/A
(a)	an arrow, containing the letter of the energy efficiency class in 100 % white, Calibri Bold and in a font size at least equivalent to that of the price, when the price is shown		N/A
(b)	the colour of the arrow matching the colour of the energy efficiency class		N/A
(c)	the range of available energy efficiency classes in 100 % black; and		N/A
(d)	the size shall be such that the arrow is clearly visible and legible. The letter in the energy efficiency class arrow shall be positioned in the centre of the rectangular part of the arrow, with a border of 0,5 pt in 100 % black placed around the arrow and the letter of the energy efficiency class By way of derogation, if the visual advertisement, technical promotional material or paper-based distance selling is printed in monochrome, the arrow can be in monochrome in that visual advertisement, technical promotional material or paper-based distance selling  <small>Figure 2</small> Coloured/monochrome left/right arrow, with range of energy efficiency classes indicated		N/A
11.5	Telemarketing-based distance selling must specifically inform the customer of the energy efficiency class of the product and of the range of energy efficiency classes available on the label, and that the customer can access the full label and the product information sheet through a free access website, or by requesting a printed copy	Optional: Manufacturer can declare based on a draft	N/A
11.6	For all the situations mentioned in points 1 to 3 and 5, it must be possible for the customer to access the label and the product information sheet through a link to the product database website, or to request a printed copy		N/A
12	Information to be provided in the case of distance selling on the internet (Annex VIII of EU 2019/2015)		N/A

Clause	Requirement + Test	Result – Remark	Verdict
12.1	The appropriate label made available by suppliers in accordance with point 1(g) Article 3 shall be shown on the display mechanism in proximity to the price of the product. The size shall be such that the label is clearly visible and legible and shall be proportionate to the size specified for the standard label in Annex III	Optional: Manufacturer can declare based on a draft	N/A
	The label may be displayed using a nested display, in which case the image used for accessing the label shall comply with the specifications laid down in point 3 of this Annex. If nested display is applied, the label shall appear on the first mouse click, mouse roll-over or tactile screen expansion on the image		N/A
12.2	The image used for accessing the label in the case of nested display, as indicated in Figure 3, shall		N/A
(a)	be an arrow in the colour corresponding to the energy efficiency class of the product on the label		N/A
(b)	indicate the energy efficiency class of the product on the arrow in 100 % white, Calibri Bold and in a font size equivalent to that of the price		N/A
(c)	have the range of available energy efficiency classes in 100 % black; and		N/A
(d)	have one of the following two formats, and its size shall be such that the arrow is clearly visible and legible. The letter in the energy efficiency class arrow shall be positioned in the centre of the rectangular part of the arrow, with a visible border in 100 % black placed around the arrow and the letter of the energy efficiency class:  <i>Figure 3</i>  Coloured left/right arrow, with range of energy efficiency classes indicated  		N/A
12.3	In the case of nested display, the sequence of display of the label shall be as follows		N/A
(a)	the image referred to in point 2 of this Annex shall be shown on the display mechanism in proximity to the price of the product		N/A
(b)	the image shall link to the label set out in Annex III		N/A
(c)	the label shall be displayed after a mouse click, mouse roll-over or tactile screen expansion on the image		N/A
(d)	the label shall be displayed by pop up, new tab, new page or inset screen display		N/A
(e)	for magnification of the label on tactile screens, the device conventions for tactile magnification shall apply		N/A
(f)	the label shall cease to be displayed by means of a close option or other standard-closing mechanism		N/A

Clause	Requirement + Test	Result – Remark	Verdict
(g)	the alternative text for the graphic, to be displayed upon failure to display the label, shall be the energy efficiency class of the product in a font size equivalent to that of the price		N/A
12.4	The appropriate product information sheet made available by suppliers in accordance with point 1(h) of Article 3 shall be shown on the display mechanism in proximity to the price of the product. The size shall be such that the product information sheet is clearly visible and legible. The product information sheet may be displayed using a nested display or by referring to the product database, in which case the link used for accessing the product information sheet shall clearly and legibly indicate 'Product information sheet'. If nested display is used, the product information sheet shall appear on the first mouse click, mouse roll-over or tactile screen expansion on the link		N/A



## Appendix test tables

Table 1	Test data											
Model:	MX-G1005AC											
Voltage (V):	31.6V d.c.					Frequency (Hz):					-	
$\Phi_{use}$ measured at:	sphere (360°)					Ambient (T/rh) (°C / %)					20/55	
Test item	Measured Value										Average	Limit
Sample:	1	2	3	4	5	6	7	8	9	10	-	-
U (V) <sup>1)</sup>	31.6	31.6	31.6	31.6	31.6	31.6	31.6	31.6	31.6	31.6	32	-
I (mA) <sup>1)</sup>	2381.4	2381.3	2381.5	2381.5	2381.4	2381.5	2381.5	2381.4	2381.4	2381.5	2381	-
P (W) <sup>1)</sup>	75.25	75.25	75.26	75.26	75.29	75.27	75.26	75.26	75.25	75.24	75.26	≤76
DF (cos $\phi_1$ ) <sup>1)2)7)</sup>												
$\Phi_{use}$ (lm) <sup>1)</sup>	11992	11984	11977	11972	11966	11961	11954	11948	11941	11938	11963	≥11500
CCT (K) <sup>1)</sup>	3847	3847	3848	3848	3848	3848	3848	3849	3849	3849	3848	-
CRI <sup>1)2)</sup>	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82	≥80 <sup>3)</sup>
Color consistency <sup>1)2)</sup>	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4	≤ 6-step
R9 <sup>1)4)</sup>	11	11	11	11	11	11	11	11	11	11	11	-
SF @ 3600h <sup>2)5)8)</sup>	S	S	S	S	S	S	S	S	S	S	SF:	≥90%
$\Phi_{use, @ 3600h^3)$ (lm)	11524	11505	11522	11541	11511	11530	11476	11542	11475	11508	11513	-
$X_{LMF @ 3600h^2) 8)6)$	96.1	96.0	96.2	96.4	96.2	96.4	96.0	96.6	96.1	96.4	96.2	≥ $X_{LMF,MIN}$ %
Flicker (P <sub>st</sub> LM) <sup>1)2)</sup>												P <sub>st</sub> LM ≤ 1,0 at full-load
Stroboscopic effect (SVM) <sup>1)2)</sup>												SVM ≤ 0,9 at full-load

Test Report PPP 11118C:2021 Rev.02



												From 1 September 2024: SVM ≤ 0,4 at full-load <sup>3)</sup>
$P_{sb}$ (W) <sup>1)9)</sup>												≤ 0.5
$P_{net}$ (W) <sup>1) 10)</sup>												≤ 0.5
<p>Supplementary information:</p> <p><sup>1)</sup>initial measurement value after aging of: min</p> <p><sup>2)</sup> for LED and OLED</p> <p><sup>3)</sup>except for HID with <math>\Phi_{use} &gt; 4</math> klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI &lt; 80</p> <p><sup>4)</sup>means the colour rendering index for a red coloured object as defined in standards</p> <p><sup>5)</sup> 'survival factor' (SF) means the defined fraction of the total number of light sources that continue to operate at a given time under defined conditions and switching frequency</p> <p><sup>6)</sup>'lumen maintenance factor' (<math>X_{LMF}</math>) means the ratio of the luminous flux emitted by a light source at a given time in its life to the initial luminous flux</p> <p><sup>7)</sup> 'displacement factor (DF) (<math>\cos \phi_1</math>)' means the cosine of the phase angle <math>\phi_1</math> between the fundamental harmonic of the mains supply voltage and the fundamental harmonic of the mains current. It is used for mains light sources using LED- or OLED-technology. The displacement factor is measured at full-load, for the reference control settings where applicable, with any lighting control parts in control mode and non-lighting parts disconnected, switched off or set to minimum power consumption according to the manufacturer' s instructions</p> <p><sup>8)</sup> '3600h' refers to (EU)2019/2020 Annex V, the total test time is 3600h (1200 cycle of 150min 'ON' and 30min 'OFF'), the actual operation time is 3000h</p> <p><sup>9)</sup>'standby power' (<math>P_{sb}</math>), expressed in watt, is the electric power consumption of a light source or of a separate controlgear in standby mode</p> <p><sup>10)</sup>'networked standby power' (<math>P_{net}</math>), expressed in watt, is the electric power consumption of a CLS or of a CSCG in networked standby mode</p> <p><b>Additional measurement</b>                  Chromaticity coordinates (x,y) <sup>1)</sup>:0.3097,0.3295                  Measured beam angle(°): N/A                  Peak intensity (cd) <sup>1)</sup>: N/A  <math>\Phi_{use@90^\circ}</math>(lm) :N/A</p>												

<b>Table 2</b>		<b>Data calculation &amp; comparison</b>			
<b>Item</b>	<b>Rated value</b>	<b>Measured value</b>	<b>Deviation</b>	<b>Remark</b>	
Beam angle (°)	-	-	-	-	
$\Phi_{use}$ (lm)	11500	11963	4.0%	P	
$P_{on}$ (W)	76	75.26	-1.0%	P	
$\eta_{TM}$	140	147	5.1%	P	
Energy efficiency class	D	D	Same Class		
$E_c$ (kWh/1000h)	76	76		P	
Remarks: Measured value in attached table 1					

Attachment 1: Photometric test record

### Lightsource Test Report

**Product Information**

Product Type: MX-G1005AC  
 Product Number: 1

Product Spec: 4000K


**CIE Colorimetric Parameters**

Chromaticity coordinates:  $x=0.3880$   $y=0.3828$   $u(u')=0.2276$   $v=0.3369$   $v'=0.5054$   
 CCT:  $T_c=3847K$  ( $duv=0.00069$ ) Color Ratio:  $R=0.188$   $G=0.781$   $B=0.031$   
 Peak Wavelength: 453.0nm Half Bandwidth: 18.1nm  
 Dominant Wavelength: 579.3nm Color Purity: 0.314  
 Central Wave: 453.2nm Gravity Wave: 453.0nm  
 CRI:  $R_a=82.1$  TM30:  $R_f=82$ ,  $R_g=96$   
 GAI:  $GAI\_BB\_8=92.4$ ,  $GAI\_BB\_15=100.3$ ,  $GAI\_EES=70.5$   

R1 =81	R2 =88	R3 =92	R4 =81	R5 =80	R6 =83	R7 =86	R8 =66
R9 =11	R10=70	R11=79	R12=55	R13=82	R14=95	R15=76	

Color Quality Scale:  $Q_a=81.7$ ,  $Q_f=81.7$ ,  $Q_p=82.3$ ,  $Q_g=93.4$   

Q1 =83	Q2 =98	Q3 =76	Q4 =73	Q5 =79	Q6 =82	Q7 =84	Q8 =88
Q9 =97	Q10=87	Q11=84	Q12=84	Q13=84	Q14=73	Q15=77	

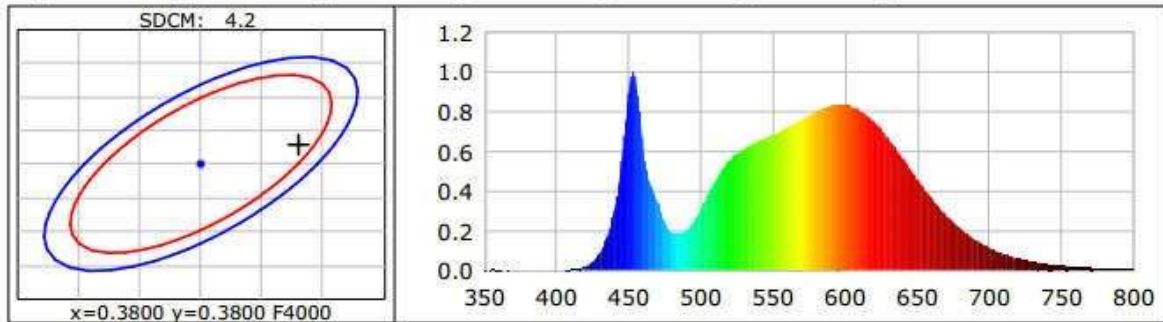

**Photometric Parameters**

Luminous Flux: 11992 lm  
 EEI: 0.09

Efficiency: 159.36 lm/W  
 Energy Efficiency Class: A++ (EU 874-2012)

Radiant Power: 35.975 W

**Electric Parameters**

Voltage: 31.600V  
 Power Factor: 1.0000

Current: 2.3814A  
 Frequency: 0.00Hz

Power: 75.25W  
 DF: 0.7067

Test Information

**Attachment3: Equipment List**

Equipment	ID No.	Model	Brand/Manufacturer	Calibration due date
Digital Power Meter	S18101184-YQ	WT310E-C2-H/G5	YOKOGAWA (Japan)	2022-05-16
High Accuracy Array Spectroradio Meter	S18121240-YQ	HAAS-2000_VIR3510	Everfine	2022-05-16
Reference Lamp	S1004525-YQ	0.8422A (110V 100W)	Sensing	2022-05-17
Thermometer	S0712415-YQ	Fluke 52-II	Fluke (USA)	2022-05-17
Full-field Speed Goniophotometer	S1207714-YQ	GO-R5000	Everfine	2022-05-15
High-accuracy Intelligent Photometer Head	S1207714a-YQ	ID-1000_P-B/ID-1000_P-C	Everfine	2022-05-17
High-accuracy Digital Photometer Head	S1207714b-YQ	ID-1000_P-B/ID-1000_P-C	Everfine	2022-05-17
High Accuracy Array Spectroradio Meter	S1207714c-YQ	HAAS-2000	Everfine	2022-05-17
Standard Light Source	S1207714d-YQ	D908	Everfine	2022-05-17
Digital Power Meter	S1207714e-YQ	PF2010	Everfine	2022-05-17
Digital CC & CV DC Power Supply	S1207714f-YQ	WY12010	Everfine	2022-05-17
Intelligent AC Power Source	S1207714g-YQ	DPS1060	Everfine	2022-05-17
Light Flickering Analyzer	S17041080-YQ	LFA-3000	Everfine	2022-05-16
Precision Digital Power Meter	S16111036-YQ	WT3001E-2A1-30A0-H/G6	YOKOGAWA (Japan)	2022-05-18

**Attachment 4: Test method standards list**

Light source type	Reference standards
<input type="checkbox"/> LED lamp	<input type="checkbox"/> EN 62612:2013+A1:2017+A11:2017+A2:2018 <input type="checkbox"/> EN 13032-4:2015+A1:2019 <input type="checkbox"/> IEC TR 63158:2018 <input type="checkbox"/> IEC TR 61547-1:2020 <input type="checkbox"/> EN IEC 63103:2020 <input type="checkbox"/> EU 2019/2020 Annex V
<input checked="" type="checkbox"/> LED module	<input checked="" type="checkbox"/> EN 62717:2017+A2:2019 <input checked="" type="checkbox"/> EN 13032-4:2015+A1:2019 <input checked="" type="checkbox"/> IEC TR 63158:2018 <input checked="" type="checkbox"/> IEC TR 61547-1:2020 <input type="checkbox"/> EN IEC 63103:2020 <input checked="" type="checkbox"/> EU 2019/2020 Annex V
<input type="checkbox"/> CFL	<input type="checkbox"/> EN 60969:1993+A1:1993+A2:2000 <input type="checkbox"/> EN 13032-1:2004+A1:2012 <input type="checkbox"/> EN IEC 63103:2020
<input type="checkbox"/> Halogen lamp	<input type="checkbox"/> EN 60357:2003+A1:2008+A2:2008+A3:2011+A11:2016 <input type="checkbox"/> EN 13032-1:2004+A1:2012 <input type="checkbox"/> EN IEC 63103:2020

- - End of report - -