
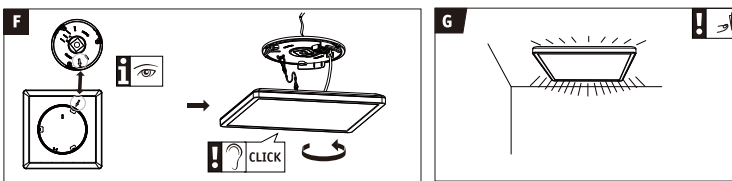


LED CEILING LIGHT

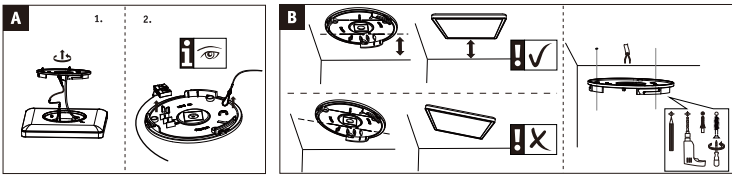

The diagram illustrates a smart lighting control system. A central vertical bar represents the control hub. Various components are connected to it:

- Top:** Two circular sensors labeled 'I' and 'O' with arrows pointing towards the hub.
- Below Top:** A circular sensor with a sun icon and '2700K ↔ 6500K' text, and a circular actuator with a sun icon and '2700K ↔ 6500K' text.
- Left Side:** A sun icon with '10% ↔ 100%' text, a moon icon with '30Min' text, and a light bulb icon with '10% 50% 100%' text.
- Right Side:** A moon icon with '20%' text, a sun icon with '10% ↔ 100%' text, and a light bulb icon with '2700K / 4000K / 6500K' text.